

Catalogue 2023



THE PROFESSIONALS REPRESENTING OUR BRAND. MEET THE H-TEAM AMBASSADORS

Andy Campbell - Forestry (left)

Andy has spent most of his working life in the forest. When not logging or running chainsaw training courses he may be found training for and competing in precision chainsaw competitions both here in the UK and abroad. He has represented the UK in all 5 of the European Logging Championships since they started in 2009. Andy is chairman of the UK Loggers, who send a team to represent the UK in the World Logging Championships where he has attended as team leader for numerous years. The UK Loggers also run our annual national precision chainsaw championship. Andy is also a Technical Standards Verifier for Lantra Awards and an assessor for City and Guilds certificates of competence.

Josephine Hedger – Arboriculture (centre)

Multiple World and European Tree Climbing Champion and former foot locking world record holder. As well as regularly competing globally, Josephine runs a successful arborist business with her husband, employing 10 people and also runs an Arboriculture training school. Josephine is extremely passionate about climbing and the Arboriculture industry.

Tim Bendle - Forestry & Arboriculture (right)

Tim has 34 years experience working as a professional contractor in the Forestry & Arboriculture Industry. Tim's extensive experience stretches to 25 years as a City & Guilds NPTC Assessor and Lantra Instructor in Forestry and Arboriculture. Tim is also one of the Principal Technical Standards Verifiers for City & Guilds NPTC and a long standing Lantra Technical Standards Verifier for Forestry and Arboriculture. Tim performs independent training and also is contracted to the Royal Agricultural University, Cirencester covering all chainsaw, climbing and forestry/arboriculture machinery activities. Tim has enjoyed a close working relationship with Husqvarna for the last 25 years and feels passionate about the brand and its continued support to the Forestry & Arboriculture Industry.



SHARE your stories and photos on your Facebook, Instagram and Twitter by tagging us.


- **(f)** HusqvarnaUK
- **W**UK_Husqvarna
- HusqvarnaUK

Husqvarna tools for forests, parks and gardens are born from a unique relationship between man, machine and nature – between our company and the people who use our equipment to shape nature every day. Dedicated people, who need the very best tools and machines to achieve the very best results.

When the going gets tough, Husqvarna tools are tougher. When work gets hard, they're lighter, more comfortable to handle and easier to use. Yet they always affect your surroundings as little as possible when it comes to noise and pollution. Our job is to make you better and make sure you get the job done – smarter, easier and more efficient and safe than ever.

Find more possibilities at www.husqvarna.com/uk

MAKE LIFE BETTER

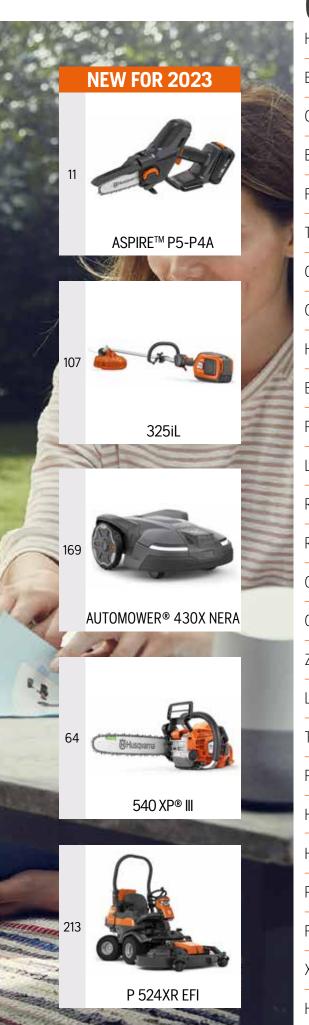

CONTENTS		
HUSQVARNA ASPIRE™	8	
BATTERY SERIES	14	
CHAINSAWS	52	
BARS & CHAINS	78	60
FORESTRY AND ARBORIST TOOLS	88	~
TRIMMERS & BRUSHCUTTERS	98	
COMBI MACHINES	118	⇒ + - ∢
CUTTING EQUIPMENT	124	æ
HEDGE TRIMMERS	130	\@ Co
BLOWERS	142	<u>—</u> @
POWER MACHINES	152	07
LAWN MOWING CONCEPT	154	mif
ROBOTIC MOWERS	156	
RIDERS	188	<u>, 19</u>
COMMERCIAL FRONT MOWERS	208	
GARDEN TRACTORS	224	£
ZERO TURN MOWERS	240	, # 0
LAWN MOWERS	246	
TILLERS	270	₹.
PRESSURE WASHERS	274	Ĺ
HUSQVARNA FLEET SERVICES™	284	(r
HUSQVARNA SERVICE	288	*
PERSONAL PROTECTIVE EQUIPMENT	290	Â
FUEL, OILS & LUBRICANTS	311	á
XPLORER LEISUREWEAR	318	Ť
HUSQVARNA MERCHANDISE	322	Ť

WE ARE IN TUNE WITH NATURE

At Husqvarna we take great pride in driving our business with one clear goal: to always stay in tune with nature. For us, that means that in everything we do we strive to create beneficial links between us, our users and nature. Our products are developed to create intelligent relationships between people and nature, between our users and their gardens, through the use of the most intuitive technology and cutting-edge solutions available. We are in tune with nature, to enable a smart and carefree user experience. Today and tomorrow.



CONTROL YOUR ROBOTIC MOWER FROM THE PALM OF YOUR HAND

The Husqvarna Automower[®] Connect app allows you to take full control of your Husqvarna robotic lawn mower. The app provides two modes of connectivity depending on model: Automower[®] Connect for long-range connectivity using cellular communication, or Automower[®] Connect@Home for short-range, using Bluetooth. See the status, start or stop, configure the settings or track the mower's GPS position – all from your phone.



Our open API solution enables endless connectivity possibilities of personalisation and add-on features through IFTTT (If This Then That).


A SIMPLER LIFE WITH INTELLIGENT TECHNOLOGY

Intelligent technology helps us provide solutions that simplify our customers' lives. Be it by integrating voice-commands through Alexa or Google Home, remote control app solutions, or energy-efficient brushless motors, we always look to new ways of applying our innovations to simplify and support a more efficient experience. Technology is the bridge that enables us all to be even more in tune with nature.







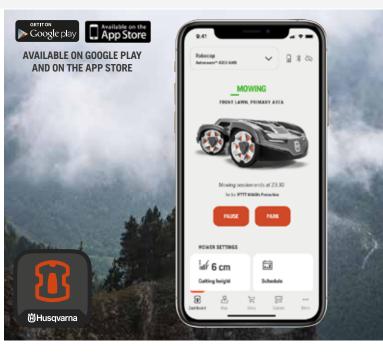



MINIMISING THE IMPACT

Being in tune with nature equals a certain amount of demands – on us as a company as well as on our conscious customers. Respect for our environment and a sustainable mindset are a given. When investing in a Husqvarna product you can always rest assured every conceivable measure has been taken to minimise its impact and its carbon footprint.

TOWARDS A CAREFREE EXISTENCE

A carefree experience starts with proud users who want to live full lives, enhanced by smart solutions. People who want their product to do its job with minimum supervision, who want to be able to relax, safe in the knowledge that their products always deliver at peak performance, with a minimum of labour investment. People who rely on technology to aid them in achieving a perfect result as well as a better tomorrow, every time.


ELEVATE YOUR EXPERIENCE WITH THE HUSQVARNA CONNECT APP

The Husqvarna Connect app is a free of charge, digital toolshed for all your equipment, making your garden work easier and more rewarding. If you own any of our products equipped with Bluetooth, you get access to additional features such as runtime statistics, charge status, maintenance notifications, local dealer details and more.





AVAILABLE ON GOOGLE PLAY AND ON THE APP STORE

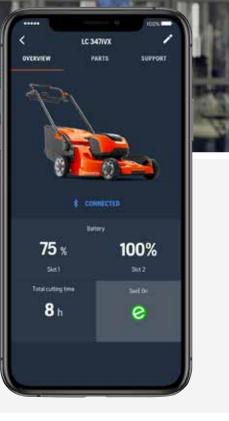

NO MATTER YOUR NEEDS, WE HAVE THE SOLUTION

The Husqvarna product range covers everything from small and easy-to-use machines for common household tasks to heavy-duty, professional equipment with outstanding power-to-weight ratio designed for intensive full time use. So, no matter your needs and requirements, Husqvarna can provide you with the best solution.



OCCASIONAL USE

HUSQVARNA ASPIRE[™]

• BATTERY

The Husqvarna® Aspire[™] range are a selection of compact tools for suburban gardens. Purposefully developed with compact performance and smart storage in mind. This range offer highly efficient, intuitive and attractively designed products for all essential garden tasks. Compatible with a bespoke Husqvarna Aspire[™] Storage-solution for minimal footprint while not in use. And as part of the POWER FOR ALL Alliance (P4A) 18v battery system, you get great flexibility and access to a wide variety of power tools for suburban homeowners.

Ideal for applications including:

- Domestic use
- Small areas
- Light garden maintenence
 and pruning



OCCASIONAL USE

100 SERIES

- BATTERY
- PETROL

The 100 series are designed for occasional use in smaller areas. The range offers durability, ease of use and minimal need for maintenance that will turn the machines into an essential part of the care of your lawns, hedges and trees. Ideally suited for use in residential gardens or for garden enthusiasts. For ultimate convenience select the 100 Series Battery range with low noise resulting in minimal disturbance, plus it's as easy as pushing a button and off you go.

Ideal for applications including:

- Domestic use
- Small areas
- Light garden maintenance and pruning



DEMANDING OCCASIONAL USE

200 SERIES

- BATTERY
- PETROL

The 200 series are designed for more demanding occasional use in small to medium areas. The range is ideally suited for demanding use in residential gardens or by garden enthusiasts with more challenging areas to maintain. Offering higher capacity and increased features over the 100 series the machines are able to tackle a wider range of conditions efficiently and effortlessly. The products are focused on ease of use for more occasional use.

Ideal for applications including:

- Demanding domestic use
- Small to medium areas
- Garden maintenance



FREQUENT USE

300 SERIES

- BATTERY
- PETROL

The 300 series are designed for frequent use in medium to large areas. The range offers good levels of performance for more demanding situations and smart features to make the task at hand easier and more enjoyable. Ideally suited to landowners, farmers and demanding domestic users who require durable machines delivering good levels of performance and operator comfort for moderate and frequent use.

Ideal for applications including:

- Frequent domestic use
- Medium to large areas
- Landowner use
- Farm and estate maintenance



PART-TIME USE

400 SERIES

- BATTERY
- PETROL

The 400 series are designed for part-time use in larger areas. The range offers higher levels of performance and durability with smart features to improve user comfort and operating efficiency. The products are ideally suited to landowner and landscaper use. They are also suited for professionals who require good performance for more moderate and less frequent use.

Ideal for applications including:

- Landowner use
- Landscapers
- Farm and country estates
- Larger areas
- Sports facilities
- Part-time grounds maintenance



FULL-TIME USE

500 SERIES

- BATTERY
- PETROL
 HYBRID

The 500 series consist of a wide range of full-time use products developed especially for the demands of intensive professional use in a range of applications. The 500 series offer maximum performance and durability levels, this in combination with low emission technology and user focused ergonomics provides increased productivity and efficiency, as well as a better more sustainable work environment.

• DIESEL

Ideal for applications including:

- Green space maintenance
- Sports and recreational
- Landscaping
- Arboriculture
- Forestry
- Noise sensitive areas (Battery)

NEW HUSQVARNA ASPIRE

Enjoy smarter garden work with compact, efficient tools

Husqvarna Aspire[™] is a new range of efficient garden tools with compact, flexible design and smart details to make your garden work enjoyable. The 18 V **POWER FOR ALL** battery system provides truly cordless convenience and great performance. Ideal for you who want to keep your own little garden the greatest place to be – with the least possible work effort. Aspire[™] Blower High blow force adjustable in 3 steps for optimal performance

Aspire™ Hedge trimmer With leaf catcher taking care of residual leaves

Û

SMART DESIGN FOR SMOOTH HANDLING Spend more time enjoying your garden

The Husqvarna Aspire[™] products are all high quality and carefully designed, with a sleek appearance and intuitive use in mind, to make your garden work nothing but effortless and enjoyable. The tools are easy to get started with and need little or no maintenance. Their low weight and highperformance motors help you get the work done efficiently and in no time.

POWER FOR ALL BATTERY SYSTEM Experience flexible power

The **POWER FOR ALL** ALLIANCE is one of the largest cross-brand 18 Volt battery systems worldwide, stretching across a multitude of home and garden applications. The **POWER FOR ALL** ALLIANCE gathers a multiple of leading brands such as Husqvarna, Bosch, Gardena, Wagner and Rapid. You'll only need one charger and one battery for all your garden products if it suits you.



HUSQVARNA ASPIRE™

Aspire[™] Pruner

0

2-in-1 tool, efficient hand pruner with extendable telescopic shaft for a ladder-free pruning experience Aspire[™] Lawn mower Easy to lift and foldable, taking up minimum storage space. Easy to manoeuver in all corners of your lawn Aspire[™] Robotic mower Compact Automower® packed with smart features, for lawns up to 400m². Aspire[™] Trimmer Easily adjustable for super-precise trimming

COMPACT FORMAT FOR EASY STORAGE You can store them all on the wall

 \odot

auto

(H)

With Husqvarna Aspire[™] you'll have your garden machines stored in perfect order. The products are designed to take up as little space as possible when not in use, being foldable, adjustable or with removable parts. Each product has a bespoke metal hook, ready to mount directly on the wall for easy and stable storage. The optional storage rail provides an even neater and more flexible solution.



EXPLORE MORE

Find out more about Husqvarna Aspire™ at husqvarna.com/uk/ HUSQVARNA ASPIRE[™]

HUSQVARNA ASPIRE[™]



Smart and efficient garden tools for compact living

The Aspire[™] products are designed for people who lack storage space and expect top-quality products without compromising on design. They are slimmed down and made to be foldable into a much smaller size to save space A smart storage solution allows for easy storage in compact spaces, as all products come with a tailor-made hook and an optional storage rail, shelf and hook kit.

AUTOMOWER[®] ASPIRE[™] R4



This compact robotic mower offers a lawn cut to perfection 24/7. Optimised for lawns up to 400m² with systematic passage mowing for precisely cut narrow passages, slope handling of 25% and carefree operation thanks to reliable mowing, frost guard and weather timer.

- Lift & tilt sensors
- Systematic passage mowing
- Weather timer
- Frost sensor
- Anti-theft alarm Automower[®] Connect
- FOTA Firmware Over The Air

NEW

Hose washable

 Compact Aspire[™] Storage 				
Working Area	Area per hour	Maximum incline	Weight	
400m ²	45m²	25% / 22°	5.9kg	
Cutting height	Noise level	Search system	Power consumption	
20 - 45mm	58dB(A)	Singlesearch (1)	18W	
Model	Order PNC	RRP ex VAT	RRP inc VAT	
Automower® Aspire [™] R4	970 56 85-03			

ASPIRE[™] T28-P4A



This 18V battery trimmer with dual trimmer line gives perfect edges with high efficiency.

- User Friendly Digital User Interface
 Automatic line feed
- Soft grip handle
- Compact Aspire[™] Storage
- Intuitive Handling P4A Battery System
- Kit 1 Includes C70 Charger & B45 Battery
 Kit 2 Includes C70 Charger & B72 Battery

Voltage	Motor type	Vibration levels F/R	Weight
18V Li-Ion	BLDC Brushless	2.26 / 1.61m/s²	2.4kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
Aspire [™] T28-P4A Unit Only	970 62 02-02		
Aspire [™] T28-P4A Kit 1	970 62 02-05		
Aspire™ T28-P4A Kit 2	970 62 02-08		

ASPIRE[™] B8X-P4A

NEW

NEW



Make garden cleaning easier with this 18V battery leaf blower.

- User Friendly Digital User Interface Multi-Mode Speeds
- Soft grip handle
- Intuitive Handling • P4A Battery System Compact Aspire[™] Storage

oompaoe nopiro	otorago	
Kit 1 Includes C70 Char	rger & B72 Battery	

Voltage Motor type Vibration levels F/R Weight

•			•
18V Li-Ion	BLDC Brushless	0.4m/s ²	2kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
Aspire [™] B8X-P4A Unit Only	970 62 04-02		
Aspire [™] B8X-P4A Kit	970 62 04-05		

HUSQVARNA ASPIRE[™]

ASPIRE[™] LC34-P4A

Made of high-quality, lightweight materials, this battery driven lawn mower runs quietly and efficiently, giving the smaller garden a flawless finish.

- User Friendly Digital User Interface
 Central Cutting Height Adjustment
- · Soft grip handle Compact Aspire[™] Storage
- Telescopic Handle
- P4A Battery System
- Kit Includes C70 Charger & B72 Battery

Voltage	Cutting width	Vibration levels F/R	Weight
18V Li-Ion	34cm	0.5m/s ²	11.8kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
Aspire [™] LC34-P4A	970 64 83-01		
Aspire [™] LC34-P4A Kit	970 64 83-05		

ASPIRE™ **PE5-P4A**



Supplied with the extendable pole, this ladder-free tool gives you the freedom and power you need for efficient pruning and light-duty sawing.

- User Friendly Digital User Interface
 Telescopic Adjustment
- Soft grip handle Compact Aspire[™] Storage

• Kit Includes C70 Charger & B45 Battery

- Intuitive Handling
 - P4A Battery System

Voltage	Chain speed	Vibration levels F/R	Weight
18V Li-Ion	5m/s	0.4 / 0.8m/s ²	1.4kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
Aspire [™] PE5-P4A Unit only	970 62 14-03		
Aspire™ PE5-P4A Kit	970 62 14-06		



Easily shape hedges and bushes with the lightweight 18V battery hedge trimmer.

- User Friendly Digital User Interface
 Leaf Catcher
- Soft grip handle Compact Aspire[™] Storage

NEW

NEW

- Intuitive Handling
- P4A Battery System
- Kit Includes C70 Charger & B45 Battery

Voltage	Knife length	Vibration levels F/R	Weight
18V Li-Ion	50cm	2.48 / 2.26m/s ²	3kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
Aspire [™] H50-P4A Unit Only	970 62 03-02		
Aspire™ H50-P4A Kit	970 62 03-05		

ASPIRE[™] P5-P4A

NEW



Together with its lighter weight, compact but high torque motor, this pruner not only delivers cutting-edge performance but also more effortless operations.

- User Friendly Digital User Interface
 Low Noise Levels
- · Soft grip handle
- Compact Aspire[™] Storage
- Kit Includes C70 Charger & B45 Battery
- Intuitive Handling
- P4A Battery System

Voltage	Chain speed	Vibration levels F/R	Weight
18V Li-Ion	5m/s	0.4 / 0.8m/s ²	1.4kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
Aspire [™] P5-P4A Unit Only	970 62 13-03		
Aspire [™] P5-P4A Kit	970 62 13-06		

Product		Product Name	Application	Battery	
				18-B72	18-B45
Pruner		P5-P4A	Pruning	60 min	30 min
Trimmer		T28-P4A	Trimming	50 min	25 min
Hedge Trimmer	Elkagema	H50-P4A	Hedge Trimming	80 min	40 min
Blower	and the second sec	B8X-P4A	Blowing	30 min	15 min
Lawn mower		LC34-P4A	Mowing	25 min	10 min



HUSQVARNA ASPIRE™

HUSQVARNA ASPIRE™



Optimised for limited space and designed to add on as your collection of Aspire[™] tools grows, the Husqvarna Aspire[™] storage solution is a high-quality wallmounted solution for tool organisation and storage. With a compatible tailor-made hook included in every Aspire[™] product package, and more options to fit common garden tools like water hoses or shovels, storing your tools has never been so simple, so space-saving, or so good-looking.

- Storage solution optimised for limited space
- Simply extend with more rails as your garden tool collection grows
- Compatible with Aspire[™] product range and your gardening tools, such as hand tools, water hose or broom.

ASPIRE[™] STORAGE RAIL



NEW

Conveniently and neatly organise your garden tools in limited space with this wall mounted storage rail.

Model	Order PNC	RRP ex VAT	RRP inc VAT
Aspire™ Storage Rail	536 65 57-01		

ASPIRE™ STO	RAGE HOOK KIT		NEW
I	•	P	1011 1011 1012 1012 1011

An accessory in the Aspire[™] storage system, this 5-hook kit is optimised to fit the full Husqvarna Aspire[™] range as well as the most common garden tools in your shed, such as hand tools, water hoses or brooms.

Model	Order PNC	RRP ex VAT	RRP inc VAT
Aspire [™] Storage Hook Kit	536 65 59-01		





Available as an accessory in the Aspire[™] range, this compact shelf is optimised for compact spaces while delivering more smart and effective storage solutions.

Model	Order PNC	RRP ex VAT	RRP inc VAT
Accessory Shelf	536 65 60-01		

Visit: www.husqvarna.com/uk/

A

HUSQVARNA ASPIRE™

P4A 18-B45 2.5AH



Husqvarna Aspire[™] 18V battery (2.5Ah) is a compact and lightweight battery, compatible with the Husqvarna Aspire[™] product range.

Voltage	Capacity	Energy	Weight
18V Li-ion	2.5Ah	45Wh	0.36kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
P4A 18-B45 2.5Ah	970 60 08-01		

P4A 18-B72 4.0AH

NEW

NEW

NEW



Husqvarna Aspire^{™™} 18V battery (4.0Ah) is a long lasting and powerful battery, compatible with the Husqvarna Aspire^{™™} product range.

Voltage	Capacity	Energy	Weight
18V Li-ion	4.0Ah	72Wh	0.66kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
P4A 18-B72 4.0Ah	970 60 09-01		

P4A 18-C70 70W



Husqvarna Aspire[™] compact charger is compatible to charge both Husqvarna Aspire[™] batteries as well as all 18V batteries within the POWER FOR ALL ALLIANCE system.

Model	Order PNC	RRP ex VAT	RRP inc VAT		
P4A 18-C70 70W	970 60 10-02				

ASPIRE[™] ACCESSORIES



Husqvarna Aspire[™] accessories to protect and maintain the Aspire[™] battery range.

Model	Order PNC
Hedge trimmer spray	538 62 92-01
Pruner chain oil	537 65 76-01
SP11G semi-chisel chain	529 34 06-32
1/4'' Pixel Mini bar	536 91 18-32
A15B Spool and Line	534 16 26-01

AUTOMOWER® ENDURANCE BLADES

Husqvarna Automower®Endurance blades providing more than twice the lifetime compared to our original blades thanks to the new design. The design allows for a harder and sharper edge without compromising on safety standards and provides cutting edges on all 4 sides.

Blades	Order PNC
6	595 08 44-01
45	595 08 44-02

HUSQVARNA RECOMMEND


NEW Hedge Trimmer Spray



Keep your hedge trimmer blades clean and lubricated for better performance and reduced wear. Read more on page 317.

Visit: www.husqvarna.com/uk/dealer-locator



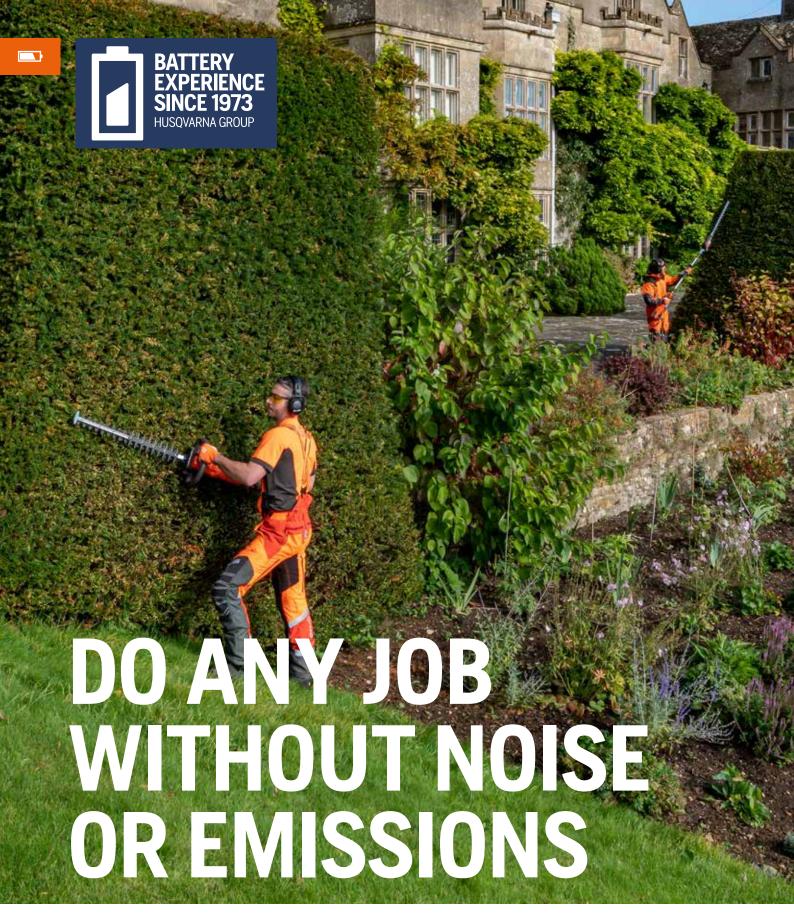

The Husqvarna Battery Series offers all the power, performance and intuitive design you expect from Husqvarna. Our range of highly-efficient handheld products, driven by a powerful Li-ion battery pack, ensure that you get significantly less noise and vibrations, minimal maintenance – and no direct emissions at all. Also, you can switch batteries between machines, because Husqvarna batteries are interchangeable between all Husqvarna battery products.





WHAT YOU GET AND HOW WE DO IT

No petrol, no fumes, no exhausts and low noise – the silent motor provides a comfortable working environment and low

Husqvarna battery handheld products feature savE[™], a battery economy mode which you can choose when you want to maximise your operational time. Some models also feature 3 performance settings allowing you to match

disturbance for the surrounding areas.

power performance to the job in hand.







PROTECTED CORE

MAXIMUM RUNTIME

DON'T DISTURB

Our batteries are all developed in-house and designed to withstand tough and frequent use. All sensitive components and cells are encapsulated and well protected against rain and dirt.

HIGH PERFORMANCE

Our brushless electric E-TORQ motors, developed in-house, deliver high, consistent torque from low revs – enough for the most demanding tasks. The E-TORQ motors are encapsulated and designed to be maintenance-free.





MADE TO FIT

Husqvarna's battery products and motors are developed directly together with the batteries. This means purpose-adapted application design that makes the machines both lighter and slimmer.



WHY CHOOSE BATTERY? THE BENEFITS OF THE HUSQVARNA BATTERY SERIES



MAXIMUM FLEXIBILITY

Our battery system can be used on all Battery Series products making them extremely flexible. The batteries have features which prolong lifespan and allow them to be run and recharged continuously. Always ready to use.



HEALTHIER WORK With no direct emissions

our battery products are clean and pleasant to use. This is especially beneficial when working in confined spaces and allows safe use in covered and indoor areas.



HIGH PERFORMANCE

Powerful compact and longlife Husqvarna developed motors with low weight offer instant and equal torque no matter what the operating speed. This results in performance which exceeds petrol equivalent machines. Our E-TORQ motors also offer 90% efficiency for maximum runtime.



LOW NOISE

Products are up to 18db(A) lower noise than petrol equivalents. A reduction of 3dB(A) is seen as half the noise level. This makes for a comfortable work environment and low disturbance for others, enabling the possibility to work in noise sensitive areas.



SAVES YOU MONEY

Costing as little as 4p to recharge a battery, the machines have a much lower cost to operate compared to petrol equivalents. The benefits are even higher when used professionally or full time.



ALL WEATHER USE

Our 500 Series products are IPX4 rated and can be used in the most demanding weather conditions. The sealed motors, electronics and batteries protect against ingress of dirt and moisture allowing you to keep working.



EASY TO USE

Low weight and excellent balance make the products extremely comfortable to handle. The machines are switched ON and OFF at the push of a button via the unique keypad making them effortless to start and also protected against accidental activation



COMFORTABLE USE

With less moving parts our products offer lower levels of vibration when compared to equivalent petrol machines. This allows the machines to be used for longer periods maximising work output whilst increasing comfort.



PROFESSIONAL DURABILITY

Using our vast experience of what is required to meet the needs of professional use, all of our 500 series battery products are put through the same duration lab test procedures as our 500 Series 2-stroke petrol products.



FLEET SERVICES

Husqvarna Fleet Services is fully compatible with the Husqvarna Professional Battery Series. Fleet Services allows landscapers and contractors to take full control of their operations. Giving insights in to their daily business allowing a more profitable & efficient operation.


Husqvarna's professional range of battery products have brought a new and refreshing aspect to a 34 year career in tree care for me. Apart from the physical and environmental benefits, Husqvarna's battery powered products have given me a faster, more efficient and far more enjoyable way of working."

Tim Bendle, H-TEAM Ambassador



MAXIMUM FLEXIBILITY AND OPTIMUM PERFORMANCE WHY WE USE 36V LI-ION

If we compare a 36V Li-ion (5.2Ah) battery versus a 72V Li-ion (2.6Ah) battery:

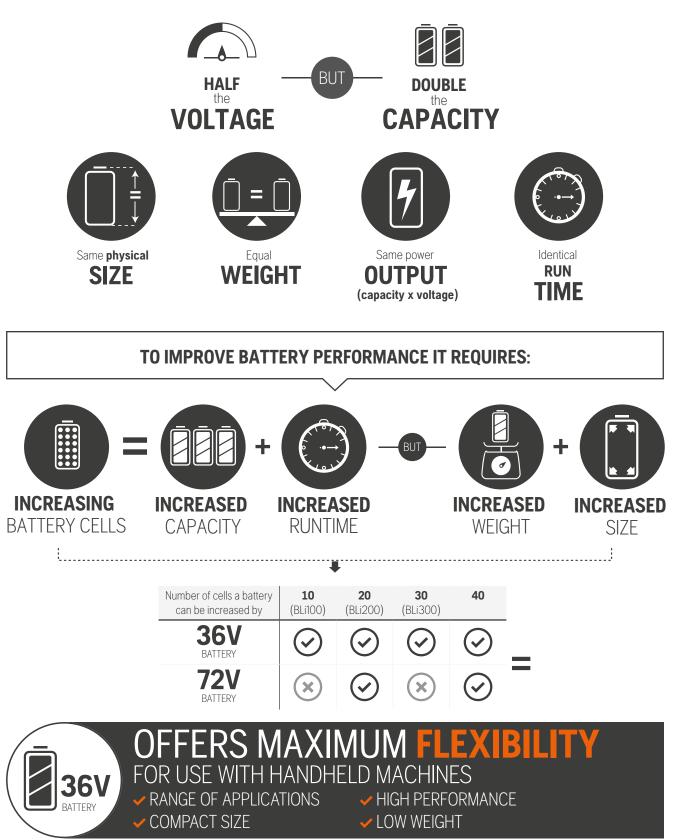

PRODUCT USE GUIDE WORKING TIME ON ONE CHARGE

The working time available with a fully charged battery depends on three variables: the capacity of the battery, which machine the battery is used with and the type of work you are doing. The chart shows an estimate of the operating time you can expect from your Husqvarna battery equipment in different work situations.

in different work sit		PRODUCT		đ	9	E RAT		9	9	5
		NAME	BLi950X	BLi300	BLi200X	BLi200	BLi100	BLi30	40-B140	40-B70
Take down / removal (Arborists only)	2	540i XP®1 / 535i XP®	12 h	3 h 30 min	2 h	2 h	1 h	3 h	1 h 30 min	45 min
Pruning		540i XP®1 / 535i XP®	7 h 30 min	2 h 15 min	1 h 15 min	1 h 15 min	40 min	1 h 45 min	1 h	30 min
runng	- Filter	340i 240i	8 h 15 min	2 h 15 min 2 h 15 min	1 h 15 min 1 h 15 min	1 h 15 min	40 min	1 h 50 min	1h 1h	30 min
	-	240i 225i	N/A N/A	N/A	N/A	1 h 15 min N/A	40 min N/A	2 h 40 min	30 min	N/A N/A
		120i	3 h	N/A	N/A	N/A	N/A	-	35 min	_
Pruning in tree	1	540i XP®1 / T540i XP®1	17 h 30 min	5 h 30 min	3h	3h	1 h 30 min	4 h	2 h	1 h
(Arborists only)	-12	535i XP® T535i XP®	17 h 30 min 17 h 30 min	5 h 30 min 5 h 30 min	3h 3h	3 h 3 h	1 h 30 min 1 h 30 min	4 h 4 h	2 h 2 h	1 h 1 h
Carpentry	AA	540i XP®	18 h 45 min	5 h 30 min	3 h	3h	1 h 30 min	4 h 30 min	2 h 30 min	1 h 15 mir
Carpentry	red to	535i XP®	20 h 30 min	5 h 30 min	3 h	3 h	1 h 30 min	4 h 30 min	2 h 30 min	1 h 15 mir
Log cutting	-	540i XP®1 / 535i XP®	3 h 30 min	1 h	30 min	30 min	15 min	45 min	30 min	15 min
5	XXX	340i 240i	4 h N/A	1 h N/A	30 min N/A	30 min N/A	15 min N/A	45 min 45 min	30 min 30 min	15 min N/A
		225i	N/A	N/A N/A	N/A	N/A N/A	N/A N/A	40 min	30 min	N/A
OLE SAWS										
Pruning	- Martin	530iPT5 / 530iP4	11 h 30 min	3 h 30 min	2 h	2 h	50 min	2 h 50 min	1 h 30 min	40 min
0	-	115iPT4 120iTK4-P	11 h 30 min 11 h 35 min	3 h 30 min 3 h 35 min	2 h 2 h 5 min	2 h 2 h 5 min	50 min 55 min	2 h 50 min 2 h 55 min	1 h 30 min 1 h 35 min	40 min 45 min
RUSHCUTTERS		1201184-1	11113311111	3113311III	211311111	211311111	5511111	2113311111	1113311111	4311111
Clearing	Eres.	535iFR	3 h 20 min	1 h	30 min	30 min	_	45 min	20 min	_
Tough	34.22	535iRXT / 535iRX	2 h 25 min	45 min	25 min	25 min	-	35 min	15 min	-
(grass blade)	- Maria	535iFR	2 h 25 min	45 min	25 min	25 min	-	35 min	15 min	-
	NULL N	525iRXT 325iR/iRJ	3 h 2 h 50 min	55 min 70 min	30 min 40 min	30 min 40 min	 20 min	40 min 55 min	20 min 30 min	 15 min
	Res 198	535iRXT/ 535iRX	2 h 50 min 1 h 50 min	30 min	40 min 15 min	40 min 15 min	20 min	20 min	10 min	- 15 11111
Tough (trimmer head)	102	535iFR	1 h 50 min	30 min	15 min	15 min	-	20 min	10 min	_
(diminer fieldd)	Star	525iRXT	2 h 15 min	40 min	20 min	20 min	-	30 min	15 min	-
RIMMERS	Laiden.	325iR/iRJ	2 h 50 min	50 min	30 min	30 min	15 min	40 min	20 min	10 min
	140000	525iLXT	2 h 15 min	40 min	20 min	20 min	-	30 min	15 min	-
Tough grass cutting	aller A	525iLK	2 h 15 min	40 min	25 min	25 min	-	30 min	15 min	-
	Sec.	520iRX / 520iLX 325iLK	4 h 15 min 2 h 50 min	1 h 15 min 50 min	40 min 30 min	40 min 30 min	40 min	1 h 50 min	1 h 20 min	30 min
	Leibher A	325iL	2 h 50 min 2 h 50 min	50 min	30 min	30 min 30 min	15 min 15 min	40 min 40 min	20 min	10 min 10 min
Light grass trimming		525iLXT	4 h 10 min	1 h 15 min	40 min	40 min	-	60 min	30 min	-
Light grass tinning		525iLK	4 h 10 min	1 h 15 min	40 min	40 min	-	60 min	1 h	-
	- there -	520iRX / 520iLX 325iLK	8 h 15 min 5 h 40 min	2 h 15 min 1 h 40 min	1 h 20 min 50 min	1 h 20 min 50 min	40 min 30 min	1 h 50 min 1 h 15 min	45 min 45 min	30 min 20 min
	- Market	325iL	5 h 40 min	1 h 40 min	50 min	50 min	30 min	1 h 15 min	50 min	20 min
	A CONTRACT	215iL	N/A	2 h 20 min	1 h 15 min	1 h 15 min	30 min	1 h 50 min	1 h	30 min
		115iL 110iL	N/A N/A	2 h 20 min 2 h 20 min	1 h 15 min 1 h 15 min	1 h 15 min 1 h 15 min	30 min 30 min	1 h 50 min 1 h 50 min	1h 1h	30 min 30 min
EDGE TRIMMERS		TIOL	11/7	2112011111	1111311111	1111311111	3011111	1113011111	1 11	3011111
Tough cutting	6. Sec. 12	522iHDR60	6 h	1 h 50 min	1 h 10 min	1 h 10 min	30 min	1 h 20 min	45 min	25 min
roagn cutting	B. Company	522iHD60 / 522iHD75	7 h	2 h 5 min	1 h	1 h	35 min	1 h 40 min	55 min	25 min
	Ni VA	520iHT4	6 h	1 h 45 min	1 h	1 h	30 min	1 h 20 min	50 min	25 min
	and the second second	520iHE3	6 h	1 h 45 min	1 h	1 h	30 min	1 h 20 min	50 min	25 min
Light trimming		522iHDR60	12 h	3 h 35 min	2 h	2 h	1 h	2 h 55 min	1 h 30 min	50 min
Light trimming		522iHDK00 522iHD60 / 522iHD75	12 h	3 h 35 min	2 h	2 h	1 h	2 h 55 min	1 h 30 min	50 min
		520iHT4	12 h 30 min	3 h 45 min	2 h	2 h	1 h	3 h	1 h 30 min	50 min
	and the	520iHE3	12 h 30 min	3 h 45 min	2 h	2 h	1h	3h	1 h 30 min	50 min
	Con alle	322iHD60	N/A	N/A	1 h 50 min	1 h 50 min	N/A	N/A	1 h 20 min	40 min
		215iHD45	7 h 30 min		2 h	2 h	1h	N/A	1 h 30 min	40 min 45 min
		2151HD45 1151HD45	7 h 30 min 7 h 30 min	_	2 h	2 h		N/A	1 h 30 min 1 h 30 min	45 min 45 min
		120ITK4-H	/ n 30 min	N/A	2 n N/A	2 n N/A	 N/A	N/A	2 h	45 min 60 min
LOWERS		1201114-11	IN / A	IN/ A	IN/ A	IN/ A	IV/A	IV/A	211	001110
		550iBTX ²	1 h	-	-	-	-	-	-	-
Tough blowing		340iBT ³	-	35 min	20 min	20 min	N/A	35 min	15 min	N/A
	ALC: NO	530iBX ⁴	1 h 45 min	35 min	15 min	15 min	10 min	30 min	N/A 15 min	5 min
	States and	525iB II 325iB	1 h 45 min 2 h 40 min	35 min 35 min	15 min 25 min	15 min 25 min	10 min 15 min	30 min 40 min	15 min 20 min	5 min 10 min
		320iB II	2 h 40 min	35 min	25 min	25 min	15 min	40 min	20 min	10 min
		120iB	2 h 50 min	50 min	30 min	30 min	20 min	50 min	30 min	15 min

APPLICATION	PRODUCT	BATTERY							
	NAME	BLi950X	BLi300	BLi200X	BLi200	BLi100	BLi30	40-B140	40-B70
Coulot In Low Course	550iBTX ²	1 h 45 min	_	-	_	_	_	_	_
Light blowing	340iBT ³	_	55 min	30 min	30 min	20 min	45 min	20 min	15 min
-	530iBX4	3 h 30 min	1 h	35 min	35 min	15 min	50 min	30 min	15 min
2000	525iB Mark II	3 h 30 min	1 h	35 min	35 min	15 min	50 min	30 min	15 min
a state	325iB	3 h 30 min	1 h	35 min	35 min	15 min	50 min	30 min	15 min
	320iB Mark II	3 h 30 min	1 h	35 min	35 min	15 min	50 min	30 min	15 min
	120iB	4 h 45 min	1 h 25 min	45 min	45 min	25 min	1 h 10 min	35 min	20 min
OWER CUTTER									
Cutting - 40mm garden plates	K 535i		41 pcs		22 pcs				
Cutting - Roof tiles	K 535i	_	164 pcs	_	87 pcs	_	_	_	_
Cutting - 70mm granite	K 535i		10 pcs		6 pcs				
Cutting - 7mm floor tiles	K 535i		244 pcs		144 pcs				
AWN MOWERS									
Mowing	LC 551iV ⁵	1 h 40 min	30 min	15 min	15 min	_	-	10 min	-
wowing	LB 553iV ⁵	1 h 50 min	35 min	20 min	20 min	_	-	-	-
and the second se	LB 54815	1 h 55 min	35 min	25 min	25 min	_	-	15 min	-
	LB 448i	-	45 min	25 min	25 min	-	35 min	20 min	-
	LB 442i	-	55 min	35 min	35 min	_	50 min	25 min	-
	LC 353iVX / LC353iV	_	35 min	20 min	20 min	_	30 min	15 min	-
	LC 347iVX	_	40 min	20 min	20 min	_	30 min	15 min	-
	LC 347iV	-	40 min	20 min	20 min	_	30 min	15 min	-
	LC 247i	-	45 min	25 min	25 min	_	40 min	20 min	-
	LB 144i	-	1 h	30 min	30 min	_	50 min	25 min	-
	LC 142iS	-	1 h 10 min	40 min	40 min	-	1 h	30 min	-
	LC 142i	_	1 h 15 min	45 min	45 min	_	1 h 5 min	35 min	-
	LC 141iV	-	1 h	30 min	30 min	_	50 min	25 min	-
	LC 141i	-	1 h 5 min	35 min	35 min	250 min	60 min	30 min	20 min
	LC 137i	-	2 h 15 min	1 h 15 min	1 h 15 min	40 min	1 h 55 min	1 h	30 min
	LB 146i	-	1 h	30 min	30 min	-	50 min	25 min	-
ETHATCHING							1		,
Dethatching	S138i	_	1 h	30 min	30 min	_	50 min	25 min	-

N /A = Values were not available at time of printing. — = Not recommended. ¹ Full capacity only provided by BLi200X or BLi300. ² Requires BLi backpack batteries ³ Run time refers to the use of 2 x BLi batteries

⁴ Requires backpack battery / battery belt FLEXI⁵ Requires adapter plate and battery adapter for use with backpack battery. The runtimes are up-to times and correspond to work time using savE^M: actual work, basic maintenance and movement / climbing needed for generic operations. Given guidelines are indicative only and may not always be repeatable from one setting to another. Required battery temperature for charging: Min 5°C, Max 40°C.

Recommended battery — Battery does not fit machine shown

CHARGING TIME FOR DIFFERENT BATTERIES AND CHARGERS

			1	1ª	5		Ŋ	8		8	
	CHARGING	QC	500	QC:	330	QC	250	40-	C80	QC80/	QC80F
BATTERY	CYCLES UP TO	CHARGI	NG LEVEL	CHARGI	NG LEVEL	CHARGIN	NG LEVEL	CHARGI	IG LEVEL	CHARGIN	IG LEVEL
		80%	100%	80%	100%	80%	100%	80%	100%	80%	100%
BLi950X	1,500	1 h 40 min	2 h 20 min	3h	4 h 5 min	-	_	_	-	_	_
BLi300	1,500	35 min	1 h	55 min	1 h 20 min	1 h 5 min	1 h 30 min	4 h 10 min	4 h 25 min	4 h	4 h 20 min
BLi200X BLi200	/ 1,500	30 min	50 min	30 min	50 min	35 min	55 min	3 h	3 h 15 min	2 h 25 min	2 h 40 min
BLi100	1,500	30 min	50 min	30 min	50 min	30 min	50 min	1 h 30 min	1 h 35 min	1 h 5 min	1 h 25 min
BLi30	600	30 min	50 min	45 min	1 h 5 min	1 h	1 h 20 min	4 h 20 min	4 h 30 min	3 h 15 min	3 h 35 min
BLi20 / 40-B140	600	25 min	40 min	25 min	40 min	30 min	45 min	2 h 30 min	2 h 35 min / 2 h 40 min	1 h 50 min	2 h 10 min
BLi10 / 40-B70	600	25 min	40 min	25 min	40 min	25 min	40 min	1 h 10 min	1 h 20 min	50 min	1 h 10 min

Battery does not fit charger shown. Required battery temperature for charging: Min 5°C, Max 40°C.

OCCASIONAL USE



The 100 Series is designed to be light and easy to use with features that makes even the most demanding tasks in the garden easy to overcome. The batteries are interchangeable between all machines giving maximum flexibility.

Ideal for applications including:

- Domestic use
- Light garden maintenance and pruning



Light, convenient and easy to use high efficiency battery trimmer for homeowner use. Ideal for trimming lawn edges.

- Intuitive keypad
- Edging mode
- Automatic shut down
- Automatic line feed
- Adjustable front handle

UPDATED

Li-ion /36V

• Kit includes B70 and C80

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	Brushed motor	1.36 / 1.05m/s²	3.3kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
110iL Unit Only	970 53 12-01		
110iL Kit	970 53 12-04		

120iB



Lightweight easy to use battery blower designed for occasional use. Ideal for noise sensitive areas and use in covered spaces.

- 10.3 m³/min, 46m/s
- Brushless motor
- Kit includes B140 and C80
- In-line air outlet
- 3 performance modes

Voltage	Motor type	Vibration levels	Weight
36V Li-ion	BLDC Brushless	1.0m/s²	2kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
120iB Unit Only	967 97 61-01		
120iB Kit	967 97 61-03		



Tackle leaves with the multi-purpose and multi-speed 120iBV cordless leaf blower. Easy transition from blower to vacuum without using a tool, a brushless motor for optimised runtime and power, and a compact size.

- Multiple power modes
- Blower and vacuum combiDigital user interface
- Brushless motorKit includes B140 and C80
 - 10 and C80

Voltage	Motor type	Vibration levels	Weight
36V Li-ion	BLDC Brushless	TBC	TBC
Model	Order PNC	RRP ex VAT	RRP inc VAT
120iBV Unit Only	970 64 98-02		
120iBV Kit	970 64 98-05		

BATTERIES



Powerful 36V Li-ion batteries designed for demanding domestic use. High capacity for longer run times.

- Ideal for 100 300 series
- 3 LED charge indicator
- Battery management system

Up to 600 chargesActive coolingContinuous use (charge / re-charge)

Model	Order PNC
40-B70 2.0Ah	970 45 71-01
40-B140 4.0Ah	970 45 72-01
BLi30 7.5Ah	967 93 77-01

CHARGERS



Efficient charges for domestic batteries. QC250 offers fast charging with active cooling to prolong life of battery.

Model	Order PNC
C80 - 80W	970 48 78-02
QC250 - 250W	967 97 01-02
QC330 - 330W	970 52 22-02

For the full range of battery accessories please see pages 42 - 45



OCCASIONAL USE



The 100 Series combi pole system is perfect for trimming and pruning high trees and hedges where long reach is required. The telescopic pole allows you to adjust the length whilst the split shaft makes transport and storage easy.

The hedge trimmer and pole saw attachments are interchangeable meaning you only need one machine for two tasks,

Ideal for applications including:

- Domestic use
- Garden maintenance and pruning
- Tall trees and hedges
- Tree thinning





Telescopic pole hedge trimmer, equipped with a telescopic tube with up to 4m reach and split shaft for easy transportation. Adjustable 7 angled cutting head for convenient cutting positions. Part of the 120iTK4 Combi Series.

- 2,800 cuts/min •
- Split shaft transport mode
- 7 angled cutting head
- Keypad with savE[™]
- 50cm blade length
- Kit includes B70 & C80

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	2 Brush motor	1.223 / 0.816m/s ²	4.5kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
120iTK4-H Unit only	970 51 59-02		
120iTK4-H Kit	970 51 59-07		

120iTK4-P





A lightweight battery-powered pole saw with good cutting capacity, low noise and no direct emissions. The telescopic tube provides reach of up to 4 metres. Part of the 120iTK4 Combi Series.

- 10m/s chain speed
- Split shaft transport mode
- Tool-less tensioner
- 275cm length
 - Kit includes B70 & C80

Keypad with savE[™]

	Voltage	Motor type	Vibration levels F/R	Weight
	36V Li-ion	2 Brush motor	2.3 / 2.2m/s ²	3.5kg (excl. battery)
	Model	Order PNC	RRP ex VAT	RRP inc VAT
12	0iTK4-P Unit Only	970 51 59-01		
	120iTK4-P Kit	970 51 59-08		



120iTK4 is a Telescopic pole product, which means that you can combine the "body" of the machine with either a pole saw or a hedge attachment. This makes it a versatile and convenient tool for several operations depending on the task at hand. Kit includes B70 & C80.

Includes pole saw & hedge trimmer
 Keypad with savE[™]

Motor type

2 Brush motor

Order PNC

- Split shaft transport mode
 Tool-less tensioner on PK4
- 7 angled cutting head on HK4

Kit includes B70 & C80
Vibration levels F/R Weight
0.793 / 0.773m/s² 6.1kg (excl. battery)

RRP inc VAT

RRP ex VAT

120iTK4-PH Unit only 970 51 59-03 120iTK4-PH Kit 970 51 59-09

Voltage

36V Li-ion

Model



HK4 Hedge Trimmer Attachment Li-ion /36V



Hedge trimmer attachement to fit 120iTK4.

Fits to	Order PNC	RRP ex VAT	RRP inc VAT
120iTK4	529 35 19-02		

PK4 Pole Saw Attachment

Li-ion /36V



Pole saw attachment to fit 120iTK4.

Fits to	Order PNC	RRP ex VAT	RRP inc VAT
120iTK4	529 35 19-01		





Powerful 36V Li-ion batteries designed for demanding domestic use. High capacity for longer run times.

- Ideal for 100 300 series
- Up to 600 charges 3 LED charge indicator
- Active cooling
- Battery management system
 Continuous use (charge / re-charge)

Model	Order PNC
40-B70 2.0Ah	970 45 71-01
40-B140 4.0Ah	970 45 72-01
BLi30 7.5Ah	967 93 77-01

CHARGERS



Efficient charges for domestic batteries. QC250 offers fast charging with active cooling to prolong life of battery.

Model	Order PNC
C80 - 80W	970 48 78-02
QC250 - 250W	967 97 01-02
QC330 - 330W	970 52 22-02

For the full range of battery accessories please see pages 42 - 45

MULTI FUNCTION ATTACHMENTS

Change between pole saw and hedge trimmer with ease



O Locate your nearest dealer Visit: www.husqvarna.com/uk/dealer-locator

OCCASIONAL USE



The 100 Series is designed to be light and easy to use with features that makes even the most demanding tasks in the garden easy to overcome. The batteries are interchangeable between all machines giving maximum flexibility.

Ideal for applications including:

- Domestic use
- Light garden maintenance and pruning

LC 137i





Compact battery-powered lawn mower for domestic use. Low noise and very easy to use. Shared battery system with handheld products for maximum flexibility.

- Collect / BioClip® / rear eject
- PowerBoost and savE[™]
- 40 litre canvas collector
- Plastic deck
- Adjustable, folding handles
- Kit includes B140 and C80

Voltage	Cutting Width	Cutting Height	Drive
36V Li-ion	37cm	25 - 75mm	Push
Model	Order PNC	RRP ex VAT	RRP inc VAT
LC 137i Unit Only	970 50 09-01		
LC 137i Kit	970 50 09-06		



Battery-powered lawn mower for domestic use. Low noise and very easy to use. Shared battery system with handheld products for maximum flexibility.

- Collect / BioClip® / rear eject
- Keypad with savE™
 50 litre canvas collector

PowerBoost

Adjustable, folding handlesKit includes B140 and C80

Voltage	Cutting Width	Cutting Height	Drive
36V Li-ion	42cm	25 - 75mm	Push
Model	Order PNC	RRP ex VAT	RRP inc VAT
LC 142i Unit Only	970 54 18-01		
LC 142i Kit	970 54 18-06		

LC 142iS UPDATED Li-ion /36V



Battery-powered variable speed self-propelled lawn mower for domestic use. Highly efficient low noise brushless motors for maximum run time.

- Collect / BioClip® / rear eject
- PowerBoost
- Keypad with savE[™]
- Adjustable, folding handles
- 50 litre canvas collector.
- Kit includes B140 and C80

		• Nit lifelides D140 and C00	
Voltage	Cutting Width	Cutting Height	Drive
36V Li-ion	42cm	25 - 75mm	Variable Speed
Model	Order PNC	RRP ex VAT	RRP inc VAT
LC 142iS Unit Only	970 54 19-01		
LC 142iS Kit 1	970 54 19-06		



Built on Husqvarna's trusted quality, design and performance, the LB 144i is a compact and lightweight battery lawn mower that's as easy to use as it is to store.

- Quiet operation
- Easy start
- Easy foldable handle
- P(
- savE™ D140 1000

PowerBoost		Kit includes B14	0 and C80
Voltage	Cutting Width	Cutting Height	Drive
36V Li-ion	44cm	25 - 75mm	Push
Model	Order PNC	RRP ex VAT	RRP inc VAT
LB 144i	970 64 82-01		



Lightweight battery-powered 2 in 1 dethatcher for efficiently removing matted thatch and moss from the lawn. Dual BLi integrated battery slots with automatic switch over.

Composite deck

• Tool-less blade change

•	Keypad	with	savE™	

- Folding handles
- Kit Includes B140 and C80

Voltage	Cutting Width	Cutting Height	Drive
36V Li-ion	38cm	-10mm - +5mm	Push
Model	Order PNC	RRP ex VAT	RRP inc VAT
S 138i Unit only	967 92 22-01		
S 138i Kit	967 92 22-03		

BATTERIES



Powerful 36V Li-ion batteries designed for demanding domestic use. High capacity for longer run times.

- Ideal for 100 300 series
- 3 LED charge indicator
- Up to 600 charges
- Battery management system
- Active cooling
 - Continuous use (charge / re-charge)

Model	Order PNC
40-B70 2.0Ah	970 45 71-01
40-B140 4.0Ah	970 45 72-01
BLi30 7.5Ah	967 93 77-01

CHARGERS



Efficient charges for domestic batteries. QC250 offers fast charging with active cooling to prolong life of battery.

Model	Order PNC
C80 - 80W	970 48 78-02
QC250 - 250W	967 97 01-02
QC330 - 330W	970 52 22-02

For the full range of battery accessories please see pages 42 - 45

Locate your nearest dealer Visit: www.husqvarna.com/uk/dealer-locator

DID YOU KNOW?

When registered, Husqvarna products are supplied with a 2 year warranty. 2 Year warranty applies to domestic use only.



Machines must be registered by an Authorised Husgvarna dealer. Find out more on page 289

PART-TIME USE



Machines designed for demanding domestic and landowner use. Choose the 325iL for lighter applications and for use in noise sensitive areas, ideal for demanding domestic use. For more heavy duty medium density applications or when used for longer periods select the 325iR which is supplied with ergonomic harness and grass blade. Products are supplied with a highly efficient line head.

Ideal for applications including:

- Property maintenance
- Overgrown areas
- Mowing larger areas (325iR)
- Noise sensitive areas (battery)



Powerful battery trimmer, ideal for quick and easy trimming of lawn edges and tall grass in larger gardens.

- Intuitive keypad with savE[™]
- Adjustable handle
- Kit 1 includes B70 and C80
- Telescopic shaft
- Automatic shut down
- Kit 2 includes B140 and C80

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	Brushless motor	4.5 / 2.7m/s ²	3.1kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
215iL Unit Only	970 53 60-01		
215iL Kit 1	970 53 60-07		
215iL Kit 2	970 53 60-03		

215iHD45





Low weight high efficiency domestic battery hedge trimmer designed for maximum ease of use.

- High efficiency motor
- 3000 cuts/min blade speed
- Kit 1 includes B70 and C80
- Digital interface with savE[™]
- 45cm / 18" blade length
 - Kit 2 includes 215iL, B140 & C80)

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	Brushless motor	2.1 / 1.7m/s²	3.2kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
215iHD45 Unit only	970 53 65-01		
215iHD45 Kit 1	970 53 65-03		
215iHD45 Kit 2	970 53 61-01		





Husqvarna 225i is a battery chainsaw, delivering high cutting capacity with less noise compared to a petrol engine, no fumes, or direct emissions.

- User Friendly Digital User Interface
 Lightweight Design
- Brushless Motor
- Hand Guard
- Tool Less Chain Tensioning
- Inertia Chain Brake

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-Ion	BLDC (brushless) Motor	3.9 / 3.9m/s ²	3.1kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
225i Unit Only - 30cm / 12'	970 54 75-02		



Easy to start and use, this reliable battery chainsaw is built on the proven expertise of Husqvarna premium products.

- User Friendly Digital User Interface Max Torque Technology
- Brushless Motor
- Battery Through Body Design
- Tool Less Chain Tensioning Automatic Shutdown

	Voltage	Motor type	Vibration levels F/R	Weight
	36V Li-Ion	BLDC (brushless) Motor	2.6 / 3.7m/s ²	3.5kg (excl. battery)
	Model	Order PNC	RRP ex VAT	RRP inc VAT
240i l	Jnit Only - 40cm / 16'	970 60 11-01		

BATTERIES



Powerful 36V Li-ion batteries designed for demanding domestic use. High capacity for longer run times.

- Ideal for 100 300 series
- 3 LED charge indicator
- Battery management system
- Up to 600 charges Active cooling
- Continuous use (charge / re-charge)

Model	Order PNC
40-B70 2.0Ah	970 45 71-01
40-B140 4.0Ah	970 45 72-01
BLi30 7.5Ah	967 93 77-01

CHARGERS



Efficient charges for domestic batteries. QC250 offers fast charging with active cooling to prolong life of battery.

Model	Order PNC
C80 - 80W	970 48 78-02
QC250 - 250W	967 97 01-02
QC330 - 330W	970 52 22-02

For the full range of battery accessories please see pages 42 - 45

PART-TIME USE



Products designed for more demanding domestic use, such as large gardens and estate maintenance. High performance motors deliver enough power to get the job done, whilst features such as intuitive keypad and cruise control make operation easy and enjoyable.

Ideal for applications including:

- **Demanding domestic use**
- Medium to large areas



Lightweight and efficient all-round battery saw ideal for cutting smaller diameter timber, firewood and farm and estate maintenance.

- LED keypad with savE[™]
- Low noise
- 40cm³ petrol performance
- Maximum performance with BLi30 Slim body
 - Tool-less tensioner
 - Vibration levels F/R Weight Voltage Motor type 36V Li-ion **BLDC Brushless** 3.2 / 3.2m/s² 2.8kg (excl. battery) RRP ex VAT RRP inc VAT

Model Order PNC Unit only - 35cm / 14" 967 98 79-14



This durable battery hedge trimmer delivers high-quality cuts at high capacity. Its lightweight, ergonomic design has a balanced rear handle and a mode selector to adapt power and runtime to the job at hand.

- User Friendly Digital User Interface
 Lightweight Design
- Flexible Battery System
- Weatherproof (IPX4)

 Automatic Shutdown
 3-Speed Mode

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-Ion	BLDC Brushless	TBC	3.2kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
322iHD60 Unit only	970 46 64-01		



High performance battery combi machine designed for part-time use. Includes TA850 trimmer attachment.

Brushless motor	
 Multi-use 	

· Power unit only

Displacement

36

325iL

36V Li-ion	0.8kW / 1.0hp
Model	Order PNC
25iLK Unit only	967 85 01-03
J-Handle Kit	587 37 50-03

Power output

 S attachments available 25cm² petrol performance 		
Vibration levels F/R	Weight	
2.6 / 1.0m/s ²	3.8kg (excl. battery)	
RRP ex VAT	RRP inc VAT	

 3 performance modes 2 attachmanta available

Li-ion /36V

Li-ion /36V



The pro-grade quality and performance of this battery trimmer effectively tackle thick grass in any weather. Its brushless E-torg motor has active cooling for maximum efficiency and is rear-mounted for optimal balance and motor protection.

- User Friendly Digital User Interface
 Brushless E-TORQ Motor
- 3-Speed Mode
- Weatherproof (IPX4)

• Tap 'n' Go Optimised Shaft & Gear

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-Ion	BLDC (brushless) Motor	TBC	3kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
325iL	970 56 68-01		



The pro-grade quality and performance of this battery brushcutter effectively tackle thick grass and light brush in any weather. Its brushless E-torq motor has active cooling for maximum efficiency and is rear-mounted for optimal balance and motor protection.

- User Friendly Digital User Interface
 Brushless E-TORQ Motor
- 3-Speed Mode
- Tap 'n' Go
- Weatherproof (IPX4)
- Optimised Shaft & Gear

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-Ion	BLDC (brushless) Motor	TBC	3.5kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
325iR	970 56 69-01		



The pro-grade quality and performance of this battery brushcutter effectively tackle thick grass and light brush in any weather. Its brushless E-torg motor has active cooling for maximum efficiency and is rear-mounted for optimal balance and motor protection.

User Friendly Digital User Interface	Brushless E-TORQ Motor
3-Speed Mode	• Tap 'n' Go

 Weatherproof (IPX4)

• Optimised Shaft & Gear

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-Ion	BLDC (brushless) Motor	TBC	3.1kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
325iRj	970 56 70-01		



Lightweight easy to use battery blower designed for part-time use. Ideal for noise sensitive areas and use in covered spaces.

- 11.15 m³/min, 49m/s
- Brushless motor

325iB

- Boost effect
- 11N blow force Cruise Control

Voltage	Motor type	Vibration levels	Weight
36V Li-ion	BLDC Brushless	2.5m/s ²	2.4kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
325iB Unit only	967 99 10-01		





Lightweight easy to use backpack battery blower designed for part-time use. Ideal for noise sensitive areas and use in covered spaces.

- 13.7 m³/min, 52m/s
- Brushless motor
- 2 battery slots
- In-line air outlet
- Intuitive LED keypad

Voltage	Motor type	Vibration levels	Weight
36V Li-ion	BLDC Brushless	0.1m/s ²	6.3kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
340iBT Unit only	967 79 62-03		



Locate your nearest dealer Visit: www.husqvarna.com/uk/dealer-locator

HUSQVARNA RECOMMEND

Husqvarna protective glasses. Page 310



PART-TIME USE



Products designed for more demanding domestic use on medium and larger areas. The battery lawn mowers feature lightweight and durable composite decks with optimised design for easy manoeuvrability and excellent collection performance. A choice of push, or variable speed self drive and both models feature adjustable height handles to suit the needs of any user.

Ideal for applications including:

- Demanding domestic use
- Medium to large areas

LC 353iVX



High capacity battery-powered lawn mower with digital speed control and brushless motors. Dual BLi integrated battery slots with automatic switch over.

• Collect / BioClip® / rear eject

Keypad with SavE[™]

• 60 litre collector

- Composite deck
- Adjustable, folding handles
 - Husqvarna Connect




Battery-powered push lawnmower for medium sized lawns. Dual BLi integrated battery slots with automatic switch over and brushless motor.

- Collect / BioClip® / rear eject
- Keypad with savE[™]
 55 litre canvas collector
- Composite deck
- Adjustable, folding handles

Voltage	Cutting Width	Cutting Height	Drive
36V Li-ion	47cm	20 - 75mm	Push
Model	Order PNC	RRP ex VAT	RRP inc VAT
LC 247i Unit only	970 54 20-01		





Li-ion Jev

Dual BLi integrated battery slots with automatic switch over for maximum convenience and run time.

Voltage	Cutting Width	Cutting Height	Drive
36V Li-ion	53cm	20 - 75mm	Variable speed
Model	Order PNC	RRP Ex VAT	RRP Inc VAT
LC 353iVX Unit only	967 86 20-01		



Battery-powered lawnmower with digital speed control and brushless motors. Dual BLi integrated battery slots with automatic switch over and Husqvarna Connect.

- Collect / BioClip® / rear eject
- Composite deck
- Keypad with savE[™]
- Adjustable, folding handles
- 55 litre canvas collector

Voltage	Cutting Width	Cutting Height	Drive
36V Li-ion	47cm	20 - 75mm	Variable speed
Model	Order PNC	RRP ex VAT	RRP inc VAT
LC 347iVX Unit only	967 86 23-01		

BATTERIES



Powerful 36V Li-ion batteries designed for demanding domestic use. High capacity for longer run times.

- Ideal for 100 300 series
- Up to 600 charges • 3 LED charge indicator
- Battery management system
- Active cooling
- Continuous use (charge / re-charge)

Model	Order PNC
40-B70 2.0Ah	970 45 71-01
40-B140 4.0Ah	970 45 72-01
BLi30 7.5Ah	967 93 77-01

CHARGERS



Efficient charges for domestic batteries. QC250 offers fast charging with active cooling to prolong life of battery.

Model	Order PNC
C80 - 80W	970 48 78-02
QC250 - 250W	967 97 01-02
QC330 - 330W	970 52 22-02

For the full range of battery accessories please see pages 42 - 45



Locate your nearest dealer Visit: www.husqvarna.com/uk/dealer-locator

HAVE YOU CONSIDERED?

The Husqvarna Automower® range. Page 156





FULL-TIME USE



High performance battery chainsaws, pole saws and power cutters designed for professional use. The products feature compact high torque motors giving constant levels of torque no matter what the cutting speed. All models offer petrol performance with lower noise, running costs and no direct emissions.

Ideal for applications including:

- Arboriculture
- Forestry
- Landscape maintenance
- Parks and public spaces
- Noise sensitive areas
- Building and light construction (535 / 540i XP[®] / K 535i)
- Hard landscaping (K 535i)



Professional battery powered chainsaw offering petrol performance with maximum ease of of use. Low noise, ideal for use in noise sensitive areas.

- X-CUT™ SP21G chain
- Low noiseCaptive bar nut
- Keypad with savE[™]
 20m/s chain speed
- Weatherproof (IPX4)

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	BLDC Brushless	2.5 / 2.8m/s ²	2.6kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
35cm / 14" Unit only	967 89 38-14		



Battery powered arborist chainsaw offering petrol equivalent chainspeed. Low noise level and weatherproof (IPX4) make it ideal in noise sensitive areas.

- X-CUT[™] SP21G chain Keypad with savE[™]
 - Secondary eyelet
 - Weather
 - Weatherproof (IPX4)

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	BLDC Brushless	2.0 / 2.4m/s ²	2.4kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
30cm / 12" Unit only	967 89 39-12		

540i X	(P® / XP® G	Li-lon Sev
Ğ	C Husquane	* 🔛

High performance professional battery powered chainsaw with high chain speed and maximum ease of of use. Low noise, ideal for use in noise sensitive areas.

Heated handle option

• Low noise

• 20m/s chain speed

- LED keypad with savE[™]
- Low noise
- Slim body
- 40cm³ petrol performance W
- Weatherproof (IPX4)

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-Ion	BLDC Brushless	3.6 / 3.7m/s ²	2.6kg(excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
540i XP® 35cm / 14"	970 57 24-14		
540i XP® 40cm / 16"	970 57 24-16		
540i XP®G 30cm / 12"	970 56 80-12		
540i XP®G 35cm / 14"	970 56 80-14		
540i XP®G 40cm / 16"	970 56 80-16		





High performance battery powered arborist chainsaw offering high chainspeed. Low noise level and weatherproof (IPX4) make it ideal in noise sensitive areas.

- Heated handle option
- Low noise
- LED keypad with savE[™]
- Secondar
- 40cm³ petrol performance
- Secondary eyelet
- Weatherproof (IPX4)

Motor type	Vibration levels F/R	Weight
BLDC Brushless	2.1 / 3.4m/s ²	2.4kg (excl. battery)
Order PNC	RRP ex VAT	RRP inc VAT
967 86 37-12		
967 86 37-14		
970 56 81-12		
970 56 81-14		
970 56 81-16		
	BLDC Brushless Order PNC 967 86 37-12 967 86 37-14 970 56 81-12 970 56 81-14	BLDC Brushless 2.1 / 3.4m/s² Order PNC RRP ex VAT 967 86 37-12 967 86 37-14 970 56 81-12 970 56 81-14







Battery power cutter designed for landscapers, pavers and roofers. Centred blade provides improved control compared to conventional power cutters. Weatherproof (IPX4)

- 230mm / 9" blade diameter
- Electric retarderIntegrated dust suppression
- Keypad with savE™
 Centred blade

• Cutting depth 76mm / 3"

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	BLDC Brushless	2.1 / 2.5m/s ²	3.5kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
23cm / 9" dia. Unit only	967 79 59-01		
Tacti S35 230mm	579 82 04-80		

BATTERIES



Powerful 36V Li-ion batteries designed for professional use. Maximum capacity for longer run times. Choose BLi backpack batteries for maximum run time.

- Ideal for 500 series
- All weather use
- 4 LED charge indicator
- Up to 1500 charges Active cooling
- Integrated & backpack options
- Battery management system
- Continuous use (charge / re-charge)

Model	Order PNC
BLi100 2.6Ah	967 09 18-01
BLi200 5.2Ah	967 09 19-01
BLi200X 5.2Ah	970 44 89-01
BLi300 9.4Ah	967 07 19-01
BLi950X 31.1Ah B/pack	967 09 32-01

CHARGERS

Li-ion /36V



Chargers designed for professional use. QC500 is optimised for BLi300 and backpack batteries.

LED status indicator

- 100 240V
- Active cooling

0	3	
Model	Order PNC	
QC330 - 330W	967 09 14-02	
QC500 - 500W	967 09 15-02	

For the full range of battery accessories please see pages 42 – 45

HUSQVARNA RECOMMEND

Technical Extreme PPE for professional performance. Pages 300 - 301



FULL-TIME USE



High performance battery grass trimmers, brushcutters and clearing saw designed for professional use. The products feature compact high torque motors giving constant levels of torque no matter what the cutting speed. This makes them ideal for a range of applications.

All models offer petrol performance with lower noise, running costs and no direct emissions.

Ideal for applications including:

- Landscape maintenance
- Parks and public spaces
- Noise sensitive areas



Professional use battery loop handle trimmer with 2-way rotation trimmer head.

- Brushless motor
- Two way head rotation
- Blade capable
- Keypad with savE[™]
- T25B Tap'n'Go head
- Weatherproof (IPX4)

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	BLDC Brushless	1.2 / 0.7m/s ²	3.0kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
520iLX Unit only	967 91 61-13		
J-Handle Kit	587 37 50-01		



Professional use battery bullhorn trimmer with 2-way rotation trimmer head. Supplied with grass blade.

Brushless motor

- Two way head rotation
- T25B head & grass blade
- Keypad with savE™
 Balance 35B harness
- Weatherproof (IPX4)

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	BLDC Brushless	1.2 / 0.7m/s ²	3.8kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
520iRX Unit only	967 91 62-03		



Robust, high-performance professional battery combi machine. Well-balanced, lightweight and power-equivalent to a 25cc petrol machine.

- Brushless E-TORQ motor
- Multi-use
- Weatherproof (IPX4)
- 3-Speed mode Attachments available
- Integrated Connectivity

		· Integrated connectivity		
Displacement	Power output	Vibration levels F/R	Weight	
36V Li-Ion	BLDC Brushless	TBC	3.3kg (excl. battery)	
Model	Order PNC	RRP ex VAT	RRP inc VAT	
525iLK Unit only	970 55 16-02			



Robust, high-performance professional battery grass trimmer. Well-balanced, lightweight and power equivalent to a 25cc petrol machine.

- Low Vib[®]
- 3-Speed Mode
- Weatherproof (IPX4)
- ActiveCool
- ErgoFeed[™] trimmer function
 Optimised Shaft & Gear
- VoltageMotor typeVibration levels F/RWeight36V Li-lonBLDC BrushlessTBC3.1kg (excl. battery)ModelOrder PNCRRP ex VATRRP inc VAT525iLXT Unit only970 55 15-01970 55 15-01



Robust, high-performance professional battery brushcutter. Lightweight, well-balanced and power equivalent to a 25cc petrol machine.

- Low Vib®
- 3-Speed Mode
- Weatherproof (IPX4)
- ActiveCool
- ErgoFeed[™] trimmer function
- Optimised Shaft & Gear

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-Ion	BLDC Brushless	TBC	3.2kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
525iRXT Unit only	970 55 14-01		



High-performance battery bull horn brushcutter designed for professional use in medium applications. 35cm³ petrol equivalent performance.

 Fleet Services[™] read 	y
---	---

- ErgoFeed auto line feed
- 45cm cutting swath
- Balance XB harness

Low Vib[®]

Weatherproof (IPX4)

Voltage	Motor type	Vibration levels F/R	
36V Li-ion	BLDC Brushless	1.2 / 1.4m/s ²	2
Model	Order PNC	RRP ex VAT	
535iRXT Unit only	967 85 06-07		



High-performance battery bull horn brushcutter designed for professional use in medium applications. 35cm³ petrol equivalent performance.

- Low Vib[®]
- Balance 55 harness
- Weatherproof (IPX4)
- Intuitive keypad
- 45cm cutting swath

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	BLDC Brushless	1.3 / 1.4m/s²	4.9kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
535iRX Unit only	967 85 06-05		



High-performance battery clearing saw designed for lighter forestry clearing applications. 35cm³ petrol equivalent performance.

- Fleet Services[™] ready
- Saw & grass blades
- 45cm cutting swath
- Intuitive keypad
- Balance 55 harnessWeatherproof (IPX4)

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	BLDC Brushless	1.4 / 1.7m/s ²	4.5kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
535iFR Unit only	967 85 05-04		

HUSQVARNA RECOMMEND

Technical Brushcutter and Trimmer clothing. Page 302



(f) www.facebook.com/HusqvarnaUK

Weight

4.9kg (excl. battery) RRP inc VAT

FULL-TIME USE



High performance battery hedge trimmers and pole saws designed for professional use. The products feature compact high torque motors giving constant levels of torque no matter what the cutting speed. This makes them ideal for a range of applications.

All models offer petrol performance with lower noise, running costs and no direct emissions.


Ideal for applications including:

- Landscape maintenance
- Parks and public spaces
- Noise sensitive areas



A lightweight and well-balanced 36 Volt battery-powered hedge trimmer for full-time professional use.

- High Cutting Performance
- Trim-cut Blades
- Lightweight Design
- Integrated Connectivity
- LowVib™ • Weatherproof (IPX4) Vibration levels F/R Voltage Motor type Weight 2.1 / 1.7m/s² 36V Li-lon BLDC (brushless) Motor 3.6kg (excl. battery) Model Order PNC RRP ex VAT RRP inc VAT





A well-balanced, lightweight 36 Volt battery-powered coarse-cut hedge trimmer for full-time professional use.

- High Cutting Performance
- Coarse-Cut Blades
- Weatherproof (IPX4)
- Lightweight Design
- Integrated Connectivity
- Multi Position rear handle

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-Ion	BLDC (brushless) Motor	2.2 / 2.6m/s ²	4kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
522iHDR60 Unit only	970 46 62-02		



A well-balanced, lightweight 36 Volt battery hedge trimmer for full-time professional use.

- High Cutting Performance • Trim-cut Blades
- Lightweight Design Integrated Connectivity
- Weatherproof (IPX4)

• LowVib™

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-Ion	BLDC (brushless) Motor	1.4 / 1.8m/s²	3.8kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
522iHD75 Unit only	970 46 61-02		

li-ion /36V



Highly efficient professional battery pole hedge trimmer with 3.5m reach, features adjustable cutter bar. Weatherproof (IPX4) with low noise and vibrations.

 Brushless motor Remote cutter adjustment

• 4000 cuts/min blade speed

- Keypad with savE[™]
 - Transport position
- Head adjustment 120°

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	BLDC Brushless	3.5 / 2.5m/s ²	4.1kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
Unit only - 55cm / 22"	967 91 58-13		



Telescopic professional battery pole hedge trimmer with 4.5m reach, features adjustable cutter bar. Weatherproof (IPX4) with low noise and vibrations.

- Brushless motor
- Extended leanth 3.5 m • 4000 cuts/min blade speed
- Transport position
- Head adjustment 120°

Keypad with savE[™]

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	BLDC Brushless	2.0 / 1.7m/s ²	5.3kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
Unit only - 55cm / 22"	967 97 12-03		



Robust fixed length battery pole saw designed for professional use. Lightweight and well balanced with petrol equivalent performance. Weatherproof (IPX4).

- 20m/s chain speed
- Fixed length
- Low noise
- Keypad with savE[™] • 250cm length
- Slimline cutting head

		j	
Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	BLDC Brushless	1.0 / 0.9m/s ²	3.4kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
530iP4 Unit only	967 88 47-11		



Robust telescopic pole saw designed for professional use. Lightweight and well balanced with petrol equivalent performance. Weatherproof (IPX4).

- 20m/s chain speed
- Telescopic • Low noise
- Keypad with savE[™] • 293 - 400cm length
- · Slimline cutting head

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	BLDC Brushless	1.0 / 1.2m/s²	5.0kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
530iPT5 Unit only	967 88 48-11		



Powerful 36V Li-ion batteries designed for professional use. Maximum capacity for longer run times. Choose BLi backpack batteries for maximum run time.

- Ideal for 500 series
- All weather use
- 4 LED charge indicator
- Battery management system
- Up to 1500 charges Active cooling
- Integrated & backpack options
- Continuous use (charge / re-charge)

Model	Order PNC
BLi100 2.6Ah	967 09 18-01
BLi200 5.2Ah	967 09 19-01
BLi200X 5.2Ah	970 44 89-01
BLi300 9.4Ah	967 07 19-01
BLi950X 31.1Ah B/pack	967 09 32-01

CHARGERS



Chargers designed for professional use. QC500 is optimised for BLi300 and backpack batteries.

- 100 240V
- · Active cooling

Jooling	
Model	Order PNC
QC330 - 330W	967 09 14-02
QC500 - 500W	967 09 15-02

· LED status indicator

For the full range of battery accessories please see pages 42 - 45



FULL-TIME USE



High performance battery handheld blowers designed for full-time professional use. With unique fan design and brushless motors, the products produce petrol equivalent performance and powerful airflow. The blowers are ideal for use in noise sensitive or enclosed spaces.

Ideal for applications including:

- Landscape maintenance •
- Parks and public spaces
- Inner city cleaning
- Noise sensitive areas
- Indoor and enclosed spaces



A powerful and low weight handheld battery blower designed for professional use. Weatherproof (IPX4) and low noise, ideal for use in noise sensitive areas.

- · Brushless motor
- Weatherproof (IPX4)
- Cruise control & Boost

Voltage	Motor type	Vibration levels	Wei
261/11:100	DLDC Druchlage	TDC	O Elva (ava

Voltage	Motor type	Vibration levels	Weight
36V Li-ion	BLDC Brushless	TBC	2.5kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
525iB Mark II Unit only	967 91 55-03		



High performance ultra low noise battery blower designed for professional use. Backpack battery only and weatherproof (IPX4) for maximum performance.

- 14.1 m³/min, 56.2m/s
- Brushless motor
- Cruise control & Boost
- 77.6dB(A) noise level Keypad with savE[™]
- Backpack battery use only

Voltage	Motor type	Vibration levels	Weight
36V Li-ion	BLDC Brushless	0.4m/s ²	2.9kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
530iBX Unit only	967 94 14-06		



Powerful and ergonomic backpack battery blower for professional use. Extremely low noise and vibration levels and weatherproof (IPX4) giving maximum flexibility and productivity.

• 12.8 m³/min,546m/s • 76.6dB(A) noise level · Brushless motor Keypad with savE[™] Cruise control & Boost Backpack battery use only Voltage Motor type Vibration levels Weight

36V Li-ion	BLDC Brushless	0.1m/s ²	6.3kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
550iBTX Unit only	967 68 11-05		

BATT<u>ERIES</u>



Powerful 36V Li-ion batteries designed for professional use. Maximum capacity for longer run times. Choose BLi backpack batteries for maximum run time.

- Ideal for 500 series
- Up to 1500 chargesActive cooling
- All weather use 4 LED charge indicator
- Integrated & backpack options
- Battery management system
 Continuous use (charge / re-charge)

Model	Order PNC
BLi100 2.6Ah	967 09 18-01
BLi200 5.2Ah	967 09 19-01
BLi200X 5.2Ah	970 44 89-01
BLi300 9.4Ah	967 07 19-01
BLi950X 31.1Ah B/pack	967 09 32-01

CHARGERS



Chargers designed for professional use. QC500 is optimised for BLi300 and backpack batteries.

· LED status indicator

• 100 - 240V

	•	Active	cooling
--	---	--------	---------

Model	Order PNC
QC330 - 330W	967 09 14-02
QC500 - 500W	967 09 15-02

For the full range of battery accessories please see pages 42 – 45

SHARE your stories and photos on your Facebook, Instagram and Twitter by tagging us.





PART-TIME / FULL-TIME USE



Collection and mulch battery lawn mowers designed for fulltime professional use on medium and larger areas in the most demanding conditions. Featuring commercial grade components and a range of commercial batteries that deliver outstanding performance, durability and reliability no matter what the application. The machines are simple to use and very easy to maintain.

Ideal for applications including:

- **Municipalities** •
- Landscape and grounds maintenance
- Parks and public spaces
- Noise sensitive areas
- Sports turf

LC 551iV



High performance fully professional self-propelled battery lawn mower designed for full-time use. High performance cast aluminium deck giving excellent collection performance. Digital variable speed control, user interface and Fleet Services[™] compatible.

- Collect / rear eject
- Cast aluminium deck / wheels
- Adjustable, folding handles
- Integrated x2 or backpack battery
 Vibration level 0.3m/s²
- 65 litre collector
- · Central height adjustment
- Weather proof (IPX4)



Compact battery mulch mower designed for semi-professional use, ideal in complex smaller areas. Features user interface with PowerBoost and savE™modes. Fleet Services™ compatible.

- BioClip® (mulch)
- · Adjustable handle
- Cast aluminium deck
- 2 integrated battery slots
- Central height adjustment
- Vibration level 0.3m/s²
- Cutting Width Cutting Height Drive Voltage 36V Li-ion 42cm 34 - 55mm Push Model Order PNC RRP ex VAT RRP inc VAT

LB 442i Unit only 970 48 23-01

LB 448i

Battery mulch mower designed for semi-professional use, ideal in complex areas. Features user interface with PowerBoost and savE[™]modes. Fleet Services[™] compatible.

- BioClip[®] (mulch)
- Adjustable handle
- Cast aluminium deck Central height adjustment
- 2 integrated battery slots
- Vibration level 0.3m/s²

Voltage	Cutting Width	Cutting Height	Drive
36V Li-ion	48cm	30 - 60mm	Push
Model	Order PNC	RRP ex VAT	RRP inc VAT
LB 448i Unit only	970 48 24-01		



Powerful 36V Li-ion batteries designed for professional use.

Maximum capacity for longer run times. Choose BLi backpack batteries for maximum run time.

Ideal for 500 series

BATTERIES

- All weather use • 4 LED charge indicator
- Up to 1500 charges Active cooling
- Integrated & backpack options

579 82 22-01

Battery management system

BLi950X 31.1Ah Battery

• Continuous use (charge / re-charge) Model Order PNC BLi100 2.6Ah 967 09 18-01 BLi200 5.2Ah 967 09 19-01 BLi200X 5.2Ah 970 44 89-01 BLi300 9.4Ah 967 07 19-01

CHARGERS



Chargers designed for professional use. QC500 is optimised for BLi300 and backpack batteries.

• 100 - 240V · LED status indicator

Active cooling

0	
Model	Order PNC
QC330 - 330W	967 09 14-02
QC500 - 500W	967 09 15-02

For the full range of battery accessories please see pages 42 - 45

DID YOU KNOW?

The BLi carrier attachment allows the BLi backpack batteries to power the mowers for extended runtime.



BLi Backpack Carrier

597 84 87-01



Intuitive keypad with SavE[™] and status indicators. Control the ground speed of the mower at the push of a button to suit your walking speed.

Li-ion JGV

Dual BLi integrated battery slots with automatic switch over for maximum convenience and run time. Backpack battery capable with BLi carrier accessory.

Voltage	Cutting Width	Cutting Height	Drive
36V Li-ion	51cm	26 - 74mm	Variable speed
Model	Order PNC	RRP Ex VAT	RRP Inc VAT
LC 551iV Unit only	967 97 72-01		



High capacity mulch mower designed for professional use, ideal in complex areas. Features user interface with PowerBoost and savE™modes. Fleet Services™ compatible.

- BioClip[®] (mulch)
- Adjustable handle
- Cast aluminium deck / wheels · Central height adjustment
- Integrated x2 or backpack battery Vibration level 0.3m/s²

. 01	Dackpack Dattery	•	C

Voltage	Cutting Width	Cutting Height	Drive
36V Li-ion	48cm	30 - 60mm	Push
Model	Order PNC	RRP ex VAT	RRP inc VAT
LB 548i Unit only	967 97 73-01		



High performance fully professional self-propelled battery lawnmower designed for full-time use. Robust aluminium deck ideal for mid to large areas.

- BioClip®
- Adjustable handle
- Cast aluminium deck
- · Integrated or backpack battery

Drive

- Mulching blade
- Vibration level 1.3m/s²

Voltage	Cutting Width	Cutting Height	Drive
36V Li-ion	53cm	28 - 65mm	Variable speed
Model	Order PNC	RRP ex VAT	RRP inc VAT
LB 553iV Unit only	970 52 57-01		

(f) www.facebook.com/HusqvarnaUK

ACCESSORIES



B70 / B140 BATTERIES



• Ideal for 100 - 300 series • 4 LED charge indicator

· Active cooling

Powerful integrated battery designed for demanding domestic use. High capacity for longer run times.

Li-ion /36V

- Battery management system
- Up to 600 charges Continuous use

Capacity	Energy	Weight
2.0Ah	72Wh	0.8kg
Order PNC	RRP ex VAT	RRP inc VAT
970 45 71-01		
970 45 72-01		
Capacity	Energy	Weight
4.0Ah	144Wh	1.3kg
Order PNC	RRP ex VAT	RRP inc VAT
	2.0Ah Order PNC 970 45 71-01 970 45 72-01 Capacity 4.0Ah	2.0Ah 72Wh Order PNC RRP ex VAT 970 45 71-01 970 45 72-01 970 45 72-01 Energy Capacity Energy 4.0Ah 144Wh

BLi30 BATTERY



Powerful integrated battery designed for demanding domestic use. High capacity for longer run times, ideal for lawn mowers, blowers and chainsaws.

Li-ion /36V

- Ideal for 100 300 series
- Battery management system
- Active cooling
- 4 LED charge indicator
- Up to 600 charges
 - Continuous use

Туре	Capacity	Energy	Weight
36V Li-ion	7.5Ah	270Wh	1.9kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
BLi30	967 93 77-01		

BLi100 BATTERY



Powerful integrated batteries designed for professional use. High power to weight ratio with maximum capacity for longer run times.

Battery management system

Li-ion /36V

Li-ion /36V

- Ideal for 500 series
- 4 LED charge indicator • Up to 1500
- Continuou

tinuous use		Active cooling	
Туре	Capacity	Energy	Weight
	0.CAb	0.4Wb	0.01/~

· All weather use

			-	
36V Li-ion	2.6Ah	94Wh	0.9kg	
Model	Order PNC	RRP ex VAT	RRP inc VAT	
BLi100	967 09 18-01			



Powerful integrated batteries designed for professional use. High power to weight ratio with maximum capacity for longer run times.

 Ideal for 500 series • 4 LED charge indicator

• Up to 1500 charges

Continuous use

- Battery management system
- Active cooling

• All weather use

Туре	Capacity	Energy	Weight
36V Li-ion	5.2Ah	187Wh	1.3kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
BLi200	967 09 19-01		

Visit: www.husqvarna.com/uk/battery-products

NEW

Li-ion 36V

BLi200X BATTERY



Powerful integrated battery designed specifically for use with the 540 / T540i XP® chainsaws. High power to weight ratio with maximum capacity for longer run times.

Battery management system

Li-ion /36V

Li-ion /36V

Li-ion Sev

- For use with T540 / 540i XP®
- 4 LED charge indicator
- Up to 1500 charges
- Continuous us

narges	 Active cooling 	
se		

· All weather use

Туре	Capacity	Energy	Weight
36V Li-ion	5.2Ah	187Wh	1.3kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
BLi200X	970 44 89-01		

BLi300 BATTERY



- Ideal for 500 series
- 4 LED charge indicator
- Up to 1500 charges
- Continuous use

Туре	Capacity	Energy	Weight
36V Li-ion	9.4Ah	338Wh	1.8kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
BLi300	967 07 19-01		



- Ideal for 500 series
- Percentage charge indicator
- Up to 1500 charges
- Continuous use

Capacity	
31.1Ah	
Order PNC	I
967 09 32-01	
579 82 22-01	
	31.1Ah Order PNC 967 09 32-01

Our largest capacity integrated battery designed for intensive professional use. Market leading capacity, ideal for high energy use applications.

- All weather use
- Battery management system
- Active cooling

Туре	Capacity	Energy	Weight
36V Li-ion	9.4Ah	338Wh	1.8kg
Model	Order PNC	RRP ex VAT	RRP inc VAT

BLi950X BACKPACK BATTERY

Large capacity high performance backpack battery designed for intensive professional use. Ideal for high energy use applications allowing up to a full days use on a single charge.

- IPX4 rated All weather use
- Battery management system
- Active cooling
- Adjustable harness with cable routing

Туре	Capacity	Energy	Weight
36V Li-ion	31.1Ah	1120Wh	6.9kg excl. harness
Model	Order PNC	RRP ex VAT	RRP inc VAT
	067 00 22 01		

WL8i Work Light



Convenient portable battery-powered work light that is easy to carry and position.

- Compatible with all BLi batteries
- Built-in power bank with USB
- outlet to charge mobile devices.
- 120° rotating head for adjusta light angle

ces.	flexible positioning
table	Mechanical impact protection
	according to EN62262 IK07

• Water and dust resistant.

Built in hook for suspension/

NEW

Li-ion /36V

light angle		according to LN	02202 1007
Model	Order PNC	RRP ex VAT	RRP inc VAT
WL8i Work Light	970 58 49-01		

WL8i Tripod NEW Li-ion /36V

Accessory for the WL8i Work Light. Allows you to adjust the light to the height you need, up to 3m.

Model	Order PNC	RRP ex VAT	RRP inc VAT
Tripod	535 32 49-01		

WL8i Diffuser



Accessory for the WL8i Work Light. Illuminates the whole work site bringing more light hours to your day.

Model	Order PNC	RRP ex VAT	RRP inc VAT
Diffuser	535 32 49-02		

Locate your nearest dealer Visit: www.husqvarna.com/uk/dealer-locator



🕞 Instagram: HusqvarnaUK



COMFORTABLE BATTERY SYSTEM BELT

Husqvarna Flexi battery belt allows you to carry your spare Husqvarna BLi batteries and accessories on your hips for added comfort during long, efficient workdays. By connecting your product to a battery in the belt, you can also reduce the carrying weight. Durable and comfortable design for tough work.





Water-resistant material

Possible to add braces available as option.

5 fixing points for batteries and application specific tools



Universal carrying system for accessories

BATTERY BELT FLEXI - CONNECTOR KIT



Enables backpack battery only products to be powered using a BLi integrated battery whilst allowing additional batteries and accessories to be carried.

• 5 fixing points

Model

- Carry up to 3 BLi batteries
- 1 BLi carrier included
- 1 BLi carrier with connector included
- · Accessory bag included

Order PNC

 Connector for 536LiBX / 540iBX RRP ex VAT RRP inc VAT

Flexi connector kit

590 77 67-03

BACKPACK ADAPTOR



Enables battery belt flexi - connector kit to be used with complete battery series handheld range (excludes 536LiBX / 540iBX).

Model	Order PNC	RRP ex VAT	RRP inc VAT
Adaptor kit	582 78 05-01		

ACCESSORY BAG



Universal carrying system for accessories or refreshments.

Model	Order PNC	RRP ex VAT	RRP inc VAT
Accessory bag	596 25 29-01		

BATTERY BELT FLEXI - ADAPTER KIT



Enables Husqvarna BLi integrated batteries to be connected to the product from the belt instead of in the product, reducing overall product weight.

- 5 fixing points
- 1 BLi carrier included · Accessory bag included
- Carry up to 3 BLi batteries
- 1 BLi carrier with adapter included

, ,				
Model	Order PNC	RRP ex VAT	RRP inc VAT	
Flexi adapter kit	590 77 67-02			

BLi CARRIER



BLi battery carrier for carrying additional batteries, clips on to flexi battery belts. Maximum 3 BLi carriers per belt.

Model	Order PNC	RRP ex VAT	RRP inc VAT
BLi Carrier	590 77 72-01		



Field charger for charging from 12 V car/truck outlet during transport.

 Voltage 12V Charge indicator LED

Charging power	Order PNC	RRP ex VAT	RRP inc VAT
80W	967 62 83-01		

QC250 CHARGER



Quick charger designed for occasional and part-time use. Features active cooling to prolong the life of the battery.

 Mains voltage 100 - 240V Charge indicator LED Active cooling DDD ov V/AT

Charging power	Order PNC	RRP ex VAI	RRP inc VAI
250W	967 97 01-02		

QC500 CHARGER



High speed charger designed for efficient charging of high capacity batteries. Ideal for intensive proffessional applications.

- Recommended use BLi300 950X
 Mains voltage 100 240V
- Charge indicator LED Active cooling

J			
Charging power	Order PNC	RRP ex VAT	RRP inc VAT
500W	970 44 95-02		

BACKPACK BATTERY HIP PAD



Fastens to the BLi backpack battery harness removing the need for two harnesses. Ideal with bullhorn brushcutter and blowers. Fits BLi520X -950X

Model	Order PNC	RRP ex VAT	RRP inc VAT
Hip pad	587 83 40-01		

C80 CHARGER



Standard charger designed for domestic use.

 Mains voltage 100 - 240V Charge indicator LED

Charging power	Order PNC	RRP ex VAT	RRP inc VAT
80W	970 48 78-02		

QC330 CHARGER



Quick charger designed for professional use.

- Mains voltage 100 240V · Active cooling
- Charge indicator LED

Charging power	Order PNC	RRP ex VAT	RRP inc VAT
330W	970 52 22-02		

V1600F VOLTAGE CONVERTER



Enables quick charging in the field by converting 12V DC from any lead-acid battery to 220V AC.

• All QC Chargers Voltage 12V

Model	Order PNC	RRP ex VAT	RRP inc VAT
V1600F Voltage Converter	967 62 85-02		

40-C80 CHARGING RAIL

 8	,			·	•
_					

The 40-C80 charging rail offers a convenient way to attach and connect up to eight 40-C80 battery chargers. (Chargers not included)

Order PNC	RRP ex VAT	RRP inc VAT	Model	Order PNC	RRP ex VAT	RRP inc VAT	
7 83 40-01			Charging Rail	536 14 43-02			

TECHNICAL SPECIFICATIONS

•	BATTERY CHAINSAWS	2251	2401

BATTERY CHAINSAWS	2251	2401	3401	535i XP®	1535i XP®	XP®G	XP®G
TECHNICAL SPECIFICATIONS							
Battery type	Li-lon						
Voltage, V	36V	36V	36	36	36	36	36
Motor type	BLDC (brushless)	BLDC (brushless					
Chain speed max power m/s	12	12	18	20	20	24	24
Sound pressure level at operators ear, dB(A)	89	91	88	93	93	95	92
Sound power level guaranteed (LWA) dB(A)	100	102	101	106	106	106	103
Equivalent vibration level (ahv, eq) front /rear handle, m/s ^{2*}	3.9/3.9	2.6/3.7	3.2 / 3.2	2.5/2.8	2.0/2.4	3.6 / 3.7	2.1 / 3.4
Chain pitch, inch	3/8 mini	3/8 mini	3/8	0.325 / 1/4	0.325 / 1/4	.325 mini	0.325
Recommended bar length, min- max, cm/inch	30-35/ 12-14	35-45/ 14-18	30-40/12-16	25-35/10-14	25-35/10-14	30-40/12-16	30-35 / 12-14
Weight (excl. battery and cutting equipment), kg	3.1	3.5	2.8	2.6	2.4	2.9	2.5
FEATURES							
Belt eye let	_	—	_	—	•	—	•
Flip up tank cap	•	•	•	•	•	•	•
Inertia chain brake	•	•	•	•	•	•	•
Intuitive key pad	•	•	•	•	•	•	•
Retained bar nuts	_	-	_	•	•	•	•
savE™	•	•	•	•	•	•	•
Tool-less chain tensioning	•	•	•	—	-	—	=

.....

535i YD®

540i XP®/

TEAE: VDA

T540i XP®/

• = Available (•) = Accessory - = Not available *Equivalent vibration level, according to EN 60745-2-13. Reported data for equivalent vibration level has a typical statistical dispersion (standard deviation) of 1 m/s². Declared vibration data from measurements when the machine is fitted with a bar length and recommended chain type. If the machine is fitted with a different bar length, the vibration level may vary by max ± 1.5 m/s².

٩		

BATTERY POLE SAWS	120iTK4-P	530iP4	530iPT5
TECHNICAL SPECIFICATIONS			
Battery type	Li-lon	Li-lon	Li-lon
Voltage, V	36	36	36
Motor type	PMDC (2 brushed)	BLDC (brushless)	BLDC (brushless)
Chain speed max power m/s	10	20	20
Sound pressure level at operators ear, dB(A)	80.6	88	83
Sound power level guaranteed (LWA) dB(A)	93	98	98
Equivalent vibration level (ahv, eq) front/rear handle, m/s ^{2*}	2.3/2.2	1.0/0.9	1.0/1.2
Chain pitch, inch	3/8	1/4	1/4
Recommended bar length, min-max, cm/inch	25/10	25-30/10-12	25-30/10-12
Length, extended, with cutting equipment, cm	285	250	400
Weight (excl. battery and cutting equipment), kg	3.5	3.4	5.0
FEATURES			
Flip up tank cap	—	•	•
Harness eyelet	•	•	•
Intuitive key pad	•	•	•
Rear impact guard	—	•	•
Retained bar nuts	-	—	_
savE™	•	•	•
Telescopic tube	•	-	•
HARNESS			
Single harness	•	•	•

BATTERY POWER CUTTER	K 535i
TECHNICAL SPECIFICATIONS	
Battery type	Li-ion
Battery voltage, V	36
Motor type	BLDC Brushless
Blade, mm	230
Cutting depth, mm	76
Sound pressure level at operators ear, dB(A)	98.5
Sound power level guaranteed (LWA) dB(A)	109.5
Equivalent vibration level (ahv, eq) handle, m/s2* 0	2.1/2.5
Weight (excl. battery and cutting equipment), kg	3.5
FEATURES	
savE™	•

•

Electric retarder

Safety loop

• = Available (•) = Accessory - = Not available *Equivalent vibration level, according to EN 60745-2-13. Reported data for equivalent vibration level has a typical statistical dispersion (standard deviation) of 1 m/s^2 . Declared vibration data from measurements when the machine is fitted with a bar length and recommended chain type. If the machine is fitted with a different bar length, the vibration level may vary by max $\pm 15 \text{ m/s}^2$.

_

_

_

Flexible harness for backpack battery

A MINIMUM OF MAINTENANCE FOR MAXIMUM PERFORMANCE

Husqvarna battery-powered products need virtually no mechanical maintenance, however, sharp cutting equipment is always recommended and the electronics and software should be checked regularly to ensure problem-free operation. Let your battery product be serviced by qualified Husqvarna technicians using only Genuine Husqvarna or recommended spare parts. This will support the product's performance and lifetime. See your owner's manual or consult your Authorised Husqvarna dealer if any uncertainty occurs.



TECHNICAL SPECIFICATIONS

BATTERY TRIMMERS	110iL	215iL	325iL	325iR	325iRJ	325iLK	
	TION	2151L	3251	3251R	3251RJ	325ILK	
TECHNICAL SPECIFICATIONS							
Battery type	Li-ion	Li-ion	Li-lon	Li-Ion	Li-lon	Li-ion	
Voltage, V	36	36	36V	36V	36V	36	
Motor type	PMDC (brushed)	BLDC (brushless)					
Tube diameter, mm	26	36	24	24	24	24	
Cutting diameter, cm	30	31	42	42	42	42	
Sound pressure level at operators ear, dB(A)	73.4	< 85	< 85 (TBC)	< 85 (TBC)	< 85 (TBC)	82	
Sound power level guaranteed (LWA) dB(A)	92	92	TBC	TBC	TBC	97	
Equivalent vibration level (ahv, eq) left/right handle, m/s ^{2*}	1.36/1.05	-	ТВС	TBC	TBC	2.6 / 1.0	
Equivalent vibration level (ahv, eq) front /rear handle, $m/s^{2\star}$	1.36/1.05	4.5/2.7	TBC	TBC	TBC	-	
Weight (excl. battery), kg	3.2	3.1	3.0 (TBC)	3.1 (TBC)	3.5 (TBC)	3.8	
FEATURES							
High handlebar	_	-	-	-	-	-	
Anti-vibration	-	-	-	-	-	-	
Intuitive key pad	•	•	•	•	•	•	
savE™	_	•	•	•	•	-	
Tap-n-Go trimmer head	-	•	•	•	•	•	
ErgoFeed™ trimmer head	-	-	-	-	-	-	
Two way rotation	-	-	-	-	-	-	
3-speed mode	-	-	•	•	•	•	
Click on attachments	-	-	_	-	-	•	
HARNESS							
Balance 35B	_	-	-	•	_	-	
Balance 55	-	-	-	-	-	-	
Balance XB™	-	-	-	-	-	-	
CUTTING EQUIPMENT							
~ A O	•/-/-	•/-/-	•/-/-	•/•/-	●/●/-	●/-/-	

• = Available (•) = Accessory - = Not available *Equivalent vibration level, according to EN 60745-2-13. Reported data for equivalent vibration level has a typical statistical dispersion (standard deviation) of 1 m/s².

BATTERY HEDGE TRIMMERS	120iTK4-H	215iHD45	322iHD60	522iHD60	522iHDR60	522iHD75	520iHE3	520iHT4
TECHNICAL SPECIFICATIONS								_
Battery type	Li-ion	Li-ion	Li-Ion	Li-lon	Li-Ion	Li-Ion	Li-ion	Li-ion
Voltage, V	36	36	36V	36V	36V	36V	36	36
Motor type	PMDC (2 brushed)	BLDC (brushless)						
Sound pressure level at operators ear dB(A)	81.3	79	TBC	81	81	81	84	80
Sound power level guaranteed (LWA), dB(A)	94	90	TBC	95	95	95	95	94
Equivalent vibration level (ahv, eq) front /rear handle, m/s ^{2*}	1.223 /0.816	1.5/1.5	TBC	2.1/1.7	2.2/2.6	1.4/1.8	3.5/2.5	2.0 / 1.7
Length cutting equipment, cm	50	45	60	60	60	75	55	55
Length, extended, with cutting equipment, cm	287	_	TBC	116	116	134	226	350
Teeth opening, mm	20	33	TBC	30	30.5	30	32	32
Cutting speed cuts /min	2800	3000	3500	4400	3200	4400	4000	4000
Weight (excl. battery), kg	4.5	3.2	3.2	3.6	3.9	3.9	4.1	5.3
FEATURES								
Adjustable rear handle	-	_	_	•	•	•	-	-
Intuitive key pad	•	•	•	•	•	•	•	•
savE™	•	•	•	-	—	-	•	•
Telescopic	•	-	-	-	-	-	-	•

• = Available (•) = Accessory - = Not available *Equivalent vibration level, according to EN 60745-2-13. Reported data for equivalent vibration level has a typical statistical dispersion (standard deviation) of 1 m/s².

4	

 500U V							
520iLX	520iRX	525iLK	525iLXT	525iRXT	535iRX	535iRXT	535iFR
Li-ion	Li-ion	Li-lon	Li-lon	Li-lon	Li-ion	Li-ion	Li-ion
36	36	36V	36V	36V	36	36	36
BLDC (brushless)	BLDC (brushless)	Husqvarna E-TORQ™ BLDC (brushless)	Husqvarna E-TORQ™ BLDC (brushless)	Husqvarna E-TORQ™ BLDC (brushless)	BLDC (brushless)	BLDC (brushless)	BLDC (brushless)
24	24	24	24	24	28	28	28
40	40	42	47	46	45	45	45
76	76	92	78.2	81.1	80	80	80
96	96	93	93	93	96	96	96
-	1.2/0.7	-	-	-	1.3/1.4	1.2/1.4	1.4/1.7
1.2/0.7	-	6.6/3.9	2.8/1.9	TBC	-	-	-
3.0	3.8	3.0	3.1	4.2	4.9	4.9	4.5
-	•	-	—	•	•	•	•
-	_	-	_	•	•	•	—
•	•	•	•	•	•	•	•
•	•	-	-	-	—	-	—
•	•	•	-	-	•	-	•
_	—	-	•	•	—	•	-
•	•	_	_	-	—	_	_
_	-	-	•	•	•	•	•
-	-	•	-	_	_	-	-
-	•	-	—	-	—	-	_
-	-	-	—	—	•	-	•
-	_	-	—	—	—	•	_
●/(●)/-	●/●/-	•/-/-	•/-/-	●/●/-	●/●/-	●/●/-	●/●/●



TECHNICAL SPECIFICATIONS

	Ľ

BATTERY BLOWERS	120iB	120iBV	325iB	340iBT	525iB MARK II	530iBX	550iBTX
TECHNICAL SPECIFICATIONS							
Battery type	Li-lon	Li-lon	Li-lon	Li-lon	Li-lon	Li-lon	Li-lon
Voltage, V	36	36V	36V	36	36	36	36
Motor type	BLDC (brushless)	BLDC (brushless)	BLDC (brushless)	BLDC (brushless)	BLDC (brushless)	BLDC (brushless)	BLDC (brushless)
Titled Blow Force	10	TBC	11	17	TBC	16	21
Sound pressure level at operators ear, dB(A)	83	TBC	83	79	85	77.6	76.6
Sound power level guaranteed (LWA), dB(A)	97	TBC	100	97	101	91	94
Equivalent vibration level (ahv, eq) handle, m/s ^{2*}	0.7	TBC	2.5	0.1	0.5	0.4	0.1
Blow force boost, (N)	10	-	15	17	17	16	21
Air Flow in Pipe, Boost, m³/min	_	-	13	17	13.33	14.1	15.6
Air flow in pipe, m ³ /min	10.3	TBC	11.15	13.7	11.33	12.4	12.8
Air speed boost, m/s	_	-		61	59	56.2	66
Air speed, m/s	46	TBC	49	52	48	49.6	54
Weight (excl. battery), kg	2.0	TBC	2.5	6.3	2.4	2.9	6.3
FEATURES							
Backpack battery	_	-	_	•	•	•	•
Belt hook	_	-	(●)	-	•	•	_
Boost effect	-	-	•	•	•	•	•
Cruise control	-	-	•	•	•	•	•
Different tube lengths	-	(●)	(●)	(•)	(•)	(●)	(•)
Internal battery	•	-	•	•	•	(●) Battery Belt Only	_
Intuitive key pad	•	-	•	•	•	•	•

• = Available (•) = Accessory - = Not available *Equivalent vibration level, according to EN 60745-2-13. Reported data for equivalent vibration level has a typical statistical dispersion (standard deviation) of 1 m/s².

BATTERIES	40-B70	40-B140	BLi30	BLi100	BLi200	BLi200X	BLi300	BLi950X
TECHNICAL SPECIFICATIONS								
Battery type	Li-lon	Li-lon	Li-lon	Li-lon	Li-lon	Li-lon	Li-lon	Li-lon
Battery voltage, V	36	36	36	36	36	36	36	36
Capacity, Ah	2.0	4.0	7.5	2.6	5.2	5.2	9.4	31.1
Energy, Wh	75.6	146	270	94	187	187	338	1120
Weight, integrated, kg	0.8	1.3	1.9	0.9	1.3	1.3	1.8	-
Weight, backpack excl. harness, kg	—	-	-	-	-	-	—	6.9
Weight, backpack incl. harness, kg	-	-	-	-	-	-	-	8.3
State of charge indication	3-Led	3-Led	3-Led	4-Led	4-Led	4-Led	4-Led	5-Led
Charging cycles (up to)	600	600	600	1500	1500	1500	1500	1500

CHARGERS	QC80F	40-C80	QC250	QC330	QC500
TECHNICAL SPECIFICATIONS					
Weight, kg	0.6	0.6	0.7	1.4	1.4
Charging power, W	80	80	250	330	500
Mains voltage, V	12	100 - 240	100 - 240	100-240	100-240

4	

BATTERY LAWN MOWERS	LC 137i	LC 142i	LC 142iS	LB 144i	LC 247i	LC 347iVX	LC 353iVX
ECHNICAL SPECIFICATIONS							
Battery type	Li-ion	Li-ion	Li-ion	Li-lon	Li-ion	Li-ion	Li-ion
Battery voltage, V	36	36	36	36V	36	36	36
Drive system	Push	Push	Self-propelled (single speed)	Push	Push	Self-propelled (variable)	Self-propelled (variable)
Drive wheels	_	-	Rear	-	—	Rear	Rear
Rims, material	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic
Wheel size, front/rear, mm	178/203.2	178/203	178/203.2	178/178	170/210	170/210	190/230
Speed, km/h	_	-	4.0	-	_	3.0 - 4.5	3.0-4.5
Cutting deck material	Plastic	ABS Plastic	ABS Plastic	ABS Plastic	Composite	Composite	Composite
Cutting methods	Collection / Rear ejection / BioClip®	Collection/ Rear ejection/ BioClip®	Collection / Rear ejection / BioClip®	BioClip®	Collection / Rear ejection / BioClip®	Collection / Rear ejection / BioClip®	Collection / Rear ejection / BioClip®
Cutting width, cm	37	42	42	44	47	47	53
Cutting height, min-max, mm	25-75	25-75	25-75	25 - 75	20-75	20-75	20-75
Cutting height steps	7	7	7	7	6	6	6
Collector type	Fabric	Fabric with dust blocker	Fabric with dust blocker	-	Fabric with dust blocker	Fabric with dust blocker	Fabric with dus blocker
Collector volume, litres	40	50	50	-	55	55	60
Handle type	Ergonomic	Ergonomic	Ergonomic	Flat	Ergonomic	Ergonomic	Ergonomic
Weight, kg	15.0	17.0	19.0	15.5	24.0	26.0	33.0
EATURES							
Central cutting height adjustment	•	•	•	•	•	•	•
Double ball-bearing wheels	•	•	•	•	•	•	•
Foldable handle	•	•	•	•	•	•	•
Handle height adjustment	•	•	•	•	•	•	•
savE™	•	•	•	•	•	•	•
Double battery slots	-	-	_	-	•	•	•
PowerBoost	•	•	•	•	•	•	•
Husqvarna Connect enabled	-	-	_	-	•	•	•
BioClip kit as an accessory	•	•	•	•	•	•	•

BATTERY LAWN MOWERS	LB 442i	LB 448i	LB 548i	LC 551iV	LB 553IV
TECHNICAL SPECIFICATIONS					
Battery type	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion
Battery voltage, V	36	36	36	36	35
Drive system	Push	Push	Push	Self-propelled (variable)	Self-propelled (variable)
Drive wheels	-	—	—	Rear	Front
Rims, material	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Wheel size, front/rear, mm	180/180	208/208	208/208	210/210	203/203
Speed, km/h	-	-	—	3.0-5	2.8-5.3
Cutting deck material	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Cutting methods	BioClip®	BioClip®	BioClip®	Collection/ Rear ejection/ BioClip®	BioClip®
Cutting width, cm	42	48	48	51	53
Cutting height, min-max, mm	34-55	30-60	30-60	26-74	28-65
Cutting height steps	4	6	6	6	5
Collector type	_	-	_	Fabric with dust blocker	_
Collector volume, litres	_	-	—	65	-
Handle type	Ergonomic	Ergonomic	Ergonomic	Ergonomic	Ergonomic
Weight, kg	24.5	28.0	31.0	41.0	38.0
FEATURES					
Central cutting height adjustment	•	•	•	•	•
Double ball-bearing wheels	•	•	•	•	•
Foldable handle	-	-	—	•	_
Handle height adjustment	•	•	•	•	•
savE™	•	•	•	•	•
Double battery slots	•	•	•	•	•
PowerBoost	•	•	•	•	•
Husqvarna Connect enabled	•	•	•	•	•
BioClip kit as an accessory	-	-	-	•	-

BATTERY SCARIFIER	S 138i
ECHNICAL SPECIFICATIONS	
Battery type	Li-ion
Battery voltage, V	36
Drive system	Push
Drive wheels	-
Rims, material	Plastic
Wheel size, front/rear, mm	170/150
Speed, km/h	-
Cutting deck material	Composite
Cutting methods	Collection / Rear ejectior
Cutting width, cm	38
Cutting height, min-max, mm	-10-+5
Cutting height steps	Stepless
Collector type	Fabric with dust blocker
Collector volume, litres	45
Handle type	Ergonomic
Weight, kg	25.5
EATURES	
Central cutting height adjustment	•
Double ball-bearing wheels	•
Foldable handle	•
Handle height adjustment	•

 \bullet = Available (\bullet) = Accessory - = Not available





Our product development never stops, and neither does our collaboration with the professional forestry workers who work with our machines. This is how we create chainsaws that help you work longer, producing less vibrations for less fatigue, and equipped with features that deliver high levels of safety. Every model gives you the power, performance and design excellence you expect from Husqvarna.

CHAINSAWS





WHAT YOU GET AND HOW WE DO IT



EFFICIENCY AT ALL TIMES

User-centric design not only spares your body, it also enables you to stay alert and productive. This is why our saws are packed with solutions that make your work convenient – and efficient.

RELIABLE CONSTRUCTION

For us, efficient chainsaw work is not synonymous with just power. A durable construction along with good safety is equally important when we design our saws, to keep you and the machine in good condition.

OPTIMAL PERFORMANCE

For fuel powered chainsaws, AutoTune[™] automatically adjusts the engine for optimal operation based on temperature, fuel type, altitude, etc. The battery chainsaws all feature efficient motors with an impressive power-to-weight ratio.

RAW POWER

The patented X-Torq[®] engine technology in our petrol-powered chainsaws uses pure air instead of an air-fuel mixture to scavenge the exhaust fumes. This results in improved fuel efficiency and lower exhaust emissions compared to conventional 2-stroke engines.



LESS FILTER CLEANING

Air injection[™] – is a centrifugal air cleaning system for reduced wear and longer operating time for our petrol-powered chainsaws. You will be able to work longer shifts without cleaning the air filter.

*Compared with equivalent models without this feature





CHAINSAWS

GIVING YOU THE POWER FOR BETTER PERFORMANCE





Improved cutting capacity (an increase of up to 15 % compared to the predecessor) design, better cooling capacity and longer lifetime.

with threads for gradual pressure relief to prevent fuel spill.





IMPROVE YOUR PERFORMANCE AND STAY COMFORTABLE AND SAFE

Husqvarna's X-Cut[™] chains and X-Force[™] bars are specially developed and are the perfect match for Husqvarna chainsaws. By choosing X-Cut[™] and X-Force[™], you'll be sure to get the very best performance from your chainsaw.

Read more on page 80

In order for you to stay safe while working, we offer an extensive range of protective clothing with the latest innovations in design and material. All our clothing will provide you with the level of protection and comfort you need to get the job done safely.





FOR A PRUNING AND **CUTTING FIREWOOD**

Chainsaws that deliver good performance and are designed with ease of use in mind, intended for occasional use.

FOR FELLING, ESTATE MAINTENANCE AND **FIREWOOD**

All-round petrol and battery chainsaws that are easy to start, use and maintain. Designed for more frequent use in more demanding conditions.

FORESTRY AND ARBORICULTURE

Our most technically advanced range of chainsaws designed for full-time intensive use in the most demanding conditions. The XP® range are developed solely to maximise your performance offering excellent power to weight ratio, class leading ergonomics and innovative solutions which optimise performance without compromise.

FOR TRAINED **ARBORISTS**

Our top-handle saws are all slim, lightweight, convenient and powerful machines. Features such as Low Vib and Air Injection™ enable you to work nonstop at consistently high performance levels, even when you are tackling challenging work in really difficult conditions.

LEARN ABOUT SAFE AND EFFICIENT TREE FELLING

Welcome to Husqvarna Chainsaw Academy - our online source about how to work safely, conveniently and efficiently at all times. You'll find everything from guides about choosing the right chainsaw, planning the felling and making the directional notch to limbing and cross-cutting. Includes tips on what to wear, and useful tools and accessories. Go to chainsawacademy.husqvarna.com







OCCASIONAL USE 100 SERIES

PART-TIME USE



400 SERIES





_



-

PRODUCT USE GUIDE

Use this guide to help you select the best product for your needs.

TYPE OF USE	MODEL	POWER SOURCE	DISPLACEMENT / VOLTAGE	WEIGHT	SUPPLIED BAR LENGTH / S	CARPENTRY	PRUNING	
	120 II	Petrol	38.2cm ³	4.7kg	35cm / 14"		•	
	130	Petrol	38.0cm ³	4.7kg	35cm / 14"		•	
	135 II	Petrol	38.0cm ³	4.7kg	35cm / 14"		•	
OCCASIONAL USE (Domestic / Homeowner)	225i	Li-ion Jack	36V Li-ion	3.1kg*	30cm / 12"	0	•	
(,	240i	Li-ion acv	36V Li-ion	3.5kg*	40cm / 16"	0	•	
	420EL	Electric	2000W	4.7kg	40cm / 16"	•	ο	
	340i	Li-ion Jacv	36V Li-ion	2.8kg*	35cm / 14"		•	
	435 II	Petrol	40.9cm ³	4.2kg	37cm / 15"		•	
	440 II	Petrol	40.9cm ³	4.3kg	37cm / 15"		•	
PART-TIME USE (FARMER / LANDOWNER)	445 II	Petrol	45.7cm ³	4.9kg	45cm / 18"			
	450 II	Petrol	50.2cm ³	4.9kg	45cm / 18"			
	455 RANCHER	Petrol	55.5cm ³	5.9kg	45cm / 18"			
	545 II	Petrol	50.1cm ³	5.3kg	37cm / 15"			
	555	Petrol	59.8cm ³	5.9kg	45cm / 18"			
FULL-TIME USE (PROFESSIONAL)	565	Petrol	70.6cm ³	6.5kg	45 - 50cm / 18 - 20"			
(PROFESSIONAL)	585	Petrol	86cm ³	7.5kg	50 - 71cm / 20 - 28"			
	535i XP®	Li-ion acv	36V Li-ion	2.6kg*	35cm / 14"	•	•	
	540 XP III	Li-ion Jav	36V Li-ion	2.9kg*	35 - 40cm / 14 - 16"	•	•	
	540i XP® / G	Li-ion Jav	36V Li-ion	2.9kg*	35 - 40cm / 14 - 16"	•	•	
	550 XP / G	Petrol	50.1cm ³	5.3 / 5.4kg	33 - 45cm / 13 - 18"			
FULL-TIME USE (INTENSIVE PROFESSIONAL)	560 XP® / G	Petrol	59.8cm ³	5.9 / 6.1kg	37 - 45cm / 15 - 18"			
	562 XP® / G	Petrol	59.8cm ³	6.1 / 6.3kg	45cm / 18"			
	572 XP° / G	Petrol	70.6cm ³	6.6 / 6.8kg	45 - 60cm / 18 - 24"			
	592 XP° / G	Petrol	92.7cm ³	7.4 / 7.6kg	50 - 71cm / 20 - 28"			
	T525	Petrol	27cm ³	2.7kg	25cm / 10"		•	
	T535i XP®	Li-ion aev	36V Li-ion	2.4kg*	30cm / 12"		•	
FULL-TIME USE	T540 XP° II	Petrol	37.7cm ³	3.9kg	30 - 35cm / 12 - 14"		•	
(QUALIFIED PERSONNEL ONLY)	T540XP° III	Petrol	37.7cm ³	3.9kg	30 - 35cm / 12 - 14"			
	T540i XP° / G	Li-ion Jacv	36V Li-ion	2.5kg*	30 - 35cm / 12 - 14"		•	

The product selector is only to be used as a guide. Please visit your local Authorised Husqvarna dealer for more information.

* Excludes battery • Optimised solution (guideline only) • Capable solution but not optimal (guideline only)

CHAINSAWS 📥



_

PAGE	58	58	58	59	59	59		60	60	61	61	61	61	62	62	62	63	64	64	64	65	66	66	67	68	70	70	71	70	71
ARBORICULTURE																										•	•	•	-	•
LARGE TREES																0								•						
MEDIUM - LARGE TREES																•						0	0	•						
MEDIUM TREES											0	0	•	•	•	•					•	•	•	•						
SMALL - MEDIUM TREES											•	•	•	•	•	•		0	0	•	•	•	•	0						
LOGS											•	•	•	•	•	•		0	0	•	•	•	•	•						
SMALL TREES	•	•	•	•	•		•	•	•	•	0	0	0	•				•	•	•	•	0	0							
FIREWOOD	•	•	•	•	•		•	•	•	•								•	•	•										



<u>_</u>

OCCASIONAL USE



Chainsaws that deliver good performance and are designed with ease of use in mind, intended for occasional use.

Ideal for lighter tasks such as:

- **Cutting firewood** •
- Felling smaller trees
- **General property maintenance**
- Pruning
- **Carpentry work**

120 II



Robust, easy to use saw for domestic use with Low Vib® system. Easy maintenance and less emissions thanks to X-Torq® technology.

- X-Torg®
- Low Vib®
- Air Injection[™]
- Combined choke / stop control

Displacement	Power output	Vibration levels F/R	Weight
38.2cm ³	1.4kW / 1.88hp	2.1 / 2.7m/s ²	4.85kg
Bar length	Order PNC	RRP ex VAT	RRP inc VAT
35cm / 14"	967 86 19-03		

130



Lightweight and efficient domestic chainsaw ideal for cutting smaller diameter timber, firewood and general property maintenance.

- X-Torg®
- Low Vib[®]
- Air Injection[™]
- Combined choke / stop control

Displacement	Power output	Vibration levels F/R	Weight
38cm ³	1.5kW / 2.0hp	3.7 / 3.5m/s ²	4.7kg
Bar length	Order PNC	RRP ex VAT	RRP inc VAT
35cm / 14"	967 10 84-01		

135 II



Powerful, efficient and easy starting domestic chainsaw ideal for cutting smaller diameter timber, firewood and general property maintenance.

- X-Torg® • Low Vib®
- Air Injection[™] • Smart Start®
- Combined choke / stop control

Combined choke	e / stop control	Side mount chair	n tensioner
Displacement	Power output	Vibration levels F/R	Weight
38cm ³	1.6kW / 2.2hp	3.7 / 3.5m/s ²	4.7kg
Bar length	Order PNC	RRP ex VAT	RRP inc VAT
35cm / 14"	967 86 18-14		

Visit: www.husqvarna.com/uk/chainsaws





Husqvarna 225i is a battery chainsaw, delivering high cutting capacity with less noise compared to a petrol engine, no fumes, or direct emissions.

- User Friendly Digital User Interface
 Lightweight Design
- Brushless Motor
- Tool Less Chain Tensioning
- Hand Guard
- Inertia Chain Brake

	Voltage	Motor type	Vibration levels F/R	Weight
	36V Li-Ion	BLDC (brushless) Motor	3.9 / 3.9m/s ²	3.1kg (excl. battery)
	Model	Order PNC	RRP ex VAT	RRP inc VAT
225	Unit Only - 30cm / 12	970 54 75-02		



Easy to start and use, this reliable battery chainsaw is built on the proven expertise of Husqvarna premium products.

- User Friendly Digital User Interface Max Torque Technology
- Brushless Motor
- Tool Less Chain Tensioning
- Battery Through Body Design
- Automatic Shutdown

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-Ion	BLDC (brushless) Motor	2.6 / 3.7m/s ²	3.5kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
240i Unit Only - 40cm / 16"	970 60 11-01		



Electric chainsaw with great performance, manoeuvrability and high chain speed. Comes with tool-less chain tensioning.

- In-line motor
- Tool-less chain tensioner
- 14.5m/s chain speed Oil level window
- 5m cable

• (
	Power	Power output	Vibration levels F/R	Weight
	Electric	2000W	5.2 / 3.9m/s ²	4.7kg
	Bar length	Order PNC	RRP ex VAT	RRP inc VAT
	40cm / 16"	967 25 65-16		

REPLACEMENT CUTTING EQUIPMENT

Model	120i	120 / 130 / 135	420EL
Bar	30cm / 12"	35cm / 14"	35cm / 14"
PNC	582 20 74-45	501 95 92-52	501 95 92-52
Chain	30cm / 12"	35cm / 14"	35cm / 14"
PNC	581 80 79-45	585 40 42-52	585 40 42-52
Technical			
Drive Links	45	5	2
Pitch	3/8"	3/	/8"
Gauge	1.1mm / .043"	1.3mm	/ .050"
Туре	H38	х-си	"" S93G
Cutter	S	Semi chisel low kick bac	k
File Size	4.5mm	4.0mm	/ 5/32"
File Kit			
PNC	N/A	587 80) 67-01

REPLACEMENT CUTTING EQUIPMENT

Model	225i	240i
Bar	30cm / 12"	40cm / 16"
PNC	501 95 95-45	578 18 66-56
Chain	30cm / 12"	40cm / 16"
PNC	581 80 81-45	585 42 28-56
Technical		
Drive Links	45	56
Pitch	3/8" Mini	3/8" Mini
Gauge	1.1mm / 0.43"	1.3mm / 0.50"
Туре	H38	S93G
Cutter	Chamfer chisel	Semi chisel
File Size	4mm / 3/8"	4mm / 3/8"
File Kit		
PNC	N/A	587 80 67-01

H-TEAM TIP

www.youtube.com/HusqvarnaUK

Personal protective equipment should be worn when using a chainsaw.

This should include :

- · Protective trousers with chainsaw protection
- A helmet with visor and hearing protection
- · Boots with chainsaw protection
- · Gloves with chainsaw protection on left hand

Content your nearest dealer Visit: www.husgvarna.com/uk/dealer-locator



PART-TIME USE



All-round petrol and battery chainsaws that are easy to start, use and maintain. Designed for more frequent use in more demanding conditions. Standard features include; easy starting, flip up filler caps, quick release engine cover and a combined start / stop switch. 340i battery chainsaw offers 40cm³ petrol equivalent performance whist being easy to use and low noise.

Ideal for heavier duty tasks such as:

- Farm and estate maintenance
- Heavy duty firewood cutting
- Felling larger trees
- Pruning



Lightweight and efficient all-round battery saw ideal for cutting smaller diameter timber, firewood and farm and estate maintenance.

- LED keypad with savE[™]
- Low noise
 40cm³ petrol performance
- Slim body

Maximum performance with BLi30

- Tool-less tensioner
- Voltage
 Motor type
 Vibration levels F/R
 Weight

 36V Li-ion
 BLDC Brushless
 3.2 / 3.2m/s²
 2.8kg (excl. battery)

 Model
 Order PNC
 RRP ex VAT
 RRP inc VAT

 Unit only 35cm / 14"
 967 98 79-14
 567 14
 567 14

435 II



Lightweight and efficient all-round saw ideal for cutting smaller diameter timber, firewood and farm and estate maintenance.

- X-Torq® • Low Vib®
- Air Injection[™]
 Combined abolice (
- Flip-up filler caps
- Combined choke / stop control

Displacement	Power output	Vibration levels F/R	Weight
40.9cm ³	1.6kW / 2.2hp	3.8 / 4.2m/s ²	4.2kg
Bar length	Order PNC	RRP ex VAT	RRP inc VAT
37cm / 15"	970 55 97-35		

Visit: www.husqvarna.com/uk/chainsaws

CHAINSAWS _

UPDATED

440 II



Lightweight and powerful all-round saw ideal for cutting smaller diameter timber, firewood and farm and estate maintenance.

- X-Torg®
- Air Injection[™]
- Low Vib[®]
- Smart Start®
- Combined choke / stop control • Flip-up filler caps

Displacement	Power output	Vibration levels F/R	Weight
40.9cm ³	1.8kW / 2.4hp	3.8 / 4.2m/s ²	4.2kg
Bar length	Order PNC	RRP ex VAT	RRP inc VAT
37cm / 15"	970 56 00-35		

445 II



Good all-round saw ideal for cutting small to medium diameter timber, firewood and farm and estate maintenance.

•	X- ⁻	[ora®
-	~	iviy

- Air Injection[™]
- Low Vib[®]
- Smart Start®
- Combined choke / stop control • Flip-up filler caps

Power output	Vibration levels F/R	Weight
2.1kW / 2.8hp	3.1 / 4.9m/s ²	4.9kg
Order PNC	RRP ex VAT	RRP inc VAT
970 55 87-38		
	2.1kW / 2.8hp Order PNC	2.1kW / 2.8hp 3.1 / 4.9m/s² Order PNC RRP ex VAT

450 II Husqvama

Powerful all-round saw ideal for cutting small and medium diameter timber, firewood and farm and estate maintenance.

• X-Torq®	 Air Injection[™]
 Low Vib[®] 	 Smart Start®

• Combined choke / stop control

• Flip-up filler caps

Displacement	Power output	Vibration levels F/R	Weight
50.2cm ³	2.4kW / 3.2hp	3.1 / 4.9m/s ²	4.9kg
Bar length	Order PNC	RRP ex VAT	RRP inc VAT
45cm / 18"	970 55 93-38		

455 RANCHER



Robust all-round saw designed for most demanding condtions, ideal for cutting medium diameter timber, firewood and farm and estate maintenance.

Air Injection[™]

- X-Torg®
- Low Vib®
- Smart Start® Combined choke / stop control • Flip-up filler caps

Displacement	Power output	Vibration levels F/R	Weight
55.5cm ³	2.6kW / 3.5hp	3.8 / 6.9m/s ²	5.9kg
Bar length	Order PNC	RRP ex VAT	RRP inc VAT
45cm / 18"	970 61 37-18		

REPLACEMENT CUTTING EQUIPMENT				
Model	435 II / 440 II	445 II / 450 II	455 Rancher	
Bar	37cm / 15"	45cm / 18"	45cm / 18"	
PNC	582 07 53-64	582 07 53-72	582 08 69-72	
Chain	37cm / 15"	45cm / 18"	45cm / 18"	
PNC	581 64 31-64	5816431-72	585 63 95-72	
Technical				
Drive Links	64	72	72	
Pitch	0.3	25"	0.325"	
Gauge	1.3mm	/ .050"	1.5mm / .058"	
Туре	X-CUT	™ SP33G	X-CUT [™] S35G	
Cutter	Pixel - Se	emi chisel	Semi chisel	
File Size	4.8mm	/ 3/16"	4.8mm / 3/16"	
File Kit				
PNC	586 93	586 93 34-01		
Model	340i			
Bar		35cm / 14"		
PNC		501 95 92-52		
Chain		35cm / 14"		
PNC		585 40 42-52		
FING		JOD 40 42-DZ		
Technical				
Drive Links		52		
Pitch		3/8"		
Gauge		1.3mm / .050"		
Туре		X-CUT ™ \$93G		
Cutter	9	Semi chisel low kick back		
File Size		4.0mm / 5/32"		
File Kit				
PNC		587 80 67-01		

_



FULL-TIME USE



Powerful chainsaws for frequent professional use. All saws feature magnesium crankcases and a 3 piece forged crankshaft for maximum durability. The 500 series models are packed with the latest technology optimising performance and productivity.

Ideal for applications including:

- Forestry
- Logging
- Horticulture
- Agriculture

545 II



New latest generation powerful, compact and fuel efficient chainsaw ideal for contractors and landscapers working with small to medium diameter timber.

- X-Torq[®]
- Low Vib®
 - Smart Start®
- Air Injection™
- Autotune[™] II
 - Combined choke / stop control

Displacement	Power output	Vibration levels F/R	Weight
50.1cm ³	2.7kW / 3.65hp	3.7 / 3.6m/s ²	5.3kg
Bar length	Order PNC	RRP ex VAT	RRP inc VAT
37cm / 15"	967 69 06-15		

555



Powerful and fuel efficient chainsaw ideal for contractors and landscapers working with medium diameter timber.

• X-Torq®

- Low Vib[®]
- Smart Start[®]
- Air Injection™
 Autotune™
- Combined choke / stop control

Displacement	Power output	Vibration levels F/R	Weight
59.8cm ³	3.1kW / 4.2hp	3.2 / 5.0m/s ²	5.9kg
Bar length	Order PNC	RRP ex VAT	RRP inc VAT
45cm / 18"	970 50 12-18		

565



Latest generation chainsaw, combining excellent ergomonics, durability, reliability with high power output, ideally suited for logging applications.

•	X-Torq® Low Vib® Smart Start®		 Air Injection™ Autotune™ II Combined choke 	e / stop control
	Displacement	Power output	Vibration levels F/R	Weight
	70.6cm ³	3.7kW / 5.0hp	5.2 / 5.3m/s ²	6.5kg
	Bar length	Order PNC	RRP ex VAT	RRP inc VAT
	45cm / 18"	966 73 39-18		
	50cm / 20"	966 73 39-20		





_



Husqvarna 585 is developed for forestry and tree care workers looking for a robust and durable chainsaw that's easy to manoeuver and maintain even in tough conditions.

• X-Torg®

- Air Injection[™]
- State-of-the-art filtration system
 Manual carburetor
- Flip-up filler cap
- Fast Acceleration

Displacement	Power output	Vibration levels F/R	Weight
86cm ³	5.1kW / 6.9hp	6.6 / 5.3m/s ²	7.5kg
Bar length	Order PNC	RRP ex VAT	RRP inc VAT
50cm / 20"	970 49 30-20		
60cm / 24"	970 49 30-24		
71cm / 28"	970 49 30-28		

REPLACEMENT CUTTING EQUIPMENT

Model	565		
Bar	45cm / 18"	50cm / 20"	
PNC	585 95 08-68	585 95 08-72	
Chain	45cm / 18"	50cm / 20"	
PNC	581 62 66-68	581 62 66-72	
Technical			
Drive Links	68	72	
Pitch	3/8"		
Gauge	1.5mm	/ .058"	
Туре	X-CUT [™] C85		
Cutter	Chisel		
File Size	5.5mm / 7/32"		
File Kit			
PNC	586 9	3 85-01	

Model	545			555
Bar	37cm / 15"		45cm / 18"	
PNC	582 08 69-6	54	582 08 69-72	
Chain	37cm / 15	,	4	5cm / 18"
PNC	585 63 95-6	54	58	5 63 95-72
Technical				
Drive Links	64			72
Pitch		0.3	25"	
Gauge		1.5mm	/ .058"	
Туре		Х-СИ	‴ S35G	
Cutter		Semi	chisel	
File Size		4.8mm	/ 3/16"	
File Kit				
PNC	505 69 81-25			
Model	585			
Bar	50cm / 20" 60cm / 24" 71cm / 28"			
PNC	596 69 11-72	596 69	9 11-84	596 69 11-92
Chain	50cm / 20"	60cm	/ 24"	71cm / 28"
PNC	581 62 66-72 581 62 66-84 581 62 66		581 62 66-92	
Technical				
Drive Links	72	8	4	92
Pitch		3/	'8"	
0	1.5mm / .058"			
Gauge		1.311111	/ .000	
Gauge Type			7™C85	
		X-CU		
Type Cutter		X-CU	T" C85 isel	
Туре		X-CU Ch	T" C85 isel	

REPLACEMENT CUTTING EQUIPMENT

HUSQVARNA RECOMMEND

Technical Robust Trousers. Page 299





FULL-TIME USE



Our most technically advanced range of chainsaws designed for full-time intensive use in the most demanding conditions. The XP® range are developed solely to maximise your performance offering excellent power to weight ratio, class leading ergonomics and innovative solutions which optimise performance without compromise.

Ideal for applications including:

- **Professional forestry**
- Logging
- Arboriculture



Professional battery powered chainsaw offering petrol performance with maximum ease of of use. Low noise, ideal for use in noise sensitive areas.

- X-CUT[™] SP21G chain
- Low noise

Captive bar nut

- Keypad with savE[™] • 20m/s chain speed
- Weatherproof (IPX4)

NEW

Vibration levels F/R Weight Voltage Motor type 36V Li-ion BLDC Brushless 2.5 / 2.8m/s² 2.6kg (excl. battery) Model Order PNC RRP ex VAT RRP inc VAT 35cm / 14" Unit only 967 89 38-14

540 XP[®] III



Nimble and lightweight petrol chainsaw. The powerful engine combined with optimal choice of S93G chain delivers impressive cutting capacity with fast acceleration.

- AutoTune[™] 3.0
- Low Vib[®]
- Flip-up filler cap
- Air Injection[™] · Combined choke / stop control

Smart Start®

Displacement	Power output	Vibration levels F/R	Weight
39cm ³	1.9kW / 2.6hp	3.7 / 5.1m/s ²	3.9kg
Bar length	Order PNC	RRP ex VAT	RRP inc VAT
30cm / 12"	970 51 82-12		
35cm / 14"	970 51 82-14		
40cm / 16"	970 51 82-16		



High performance professional battery powered chainsaw with high chain speed and maximum ease of of use. Low noise, ideal for use in noise sensitive areas.

- X-CUT[™] SP21G chain
- LED keypad with savE[™] Slim hody
- Low noise 40cm³ petrol performance

- Olin bouy	
 Weatherproof 	(IPX4)

reent pererpenentance		moduloipiooi (
Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	BLDC Brushless	3.6 / 3.7m/s ²	2.9kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
35cm / 14" Unit only	970 57 24-14		
40cm / 16" Unit only	970 57 24-16		





High performance professional battery powered chainsaw with high chain speed and maximum ease of of use. Low noise, ideal for use in noise sensitive areas.

- User Friendly Digital User Interface
 Heated Handles
- Chain Oil Sensor
- savE™
- Efficient Brushless Motor
- Weatherproof (IPX4)

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-Ion	BLDC Brushless	TBC	TBC
Model	Order PNC	RRP ex VAT	RRP inc VAT
30cm / 12" Unit only	970 56 80-12		
35cm / 14" Unit only	970 56 80-14		
40cm / 16" Unit only	970 56 80-16		

550 XP® II



New latest generation high performance compact XP saw offering excellent ergonomics, ideal for forestry and arb applications.

• X-Torq® • Low Vib®		 Air Injection™ Autotune™ II 	
Displacement	Power output	Vibration levels F/R	Weight
50.1cm ³	3.0kW / 4.1hp	4.4 / 4.1m/s ²	5.3kg
Bar length	Order PNC	RRP ex VAT	RRP inc VAT
37cm / 15" 45cm / 18"	967 69 08-15 967 69 08-18		

550 XP[®] G II



New latest generation high performance compact XP saw offering excellent ergonomics, ideal for forestry and arb applications.

- X-Torg®
- Low Vib®

37cm / 15"

45cm / 18"

Heated Handles

Air Injection™
Autotune™ II

 Displacement
 Power output
 Vibration levels F/R

 50.1cm³
 3.0kW / 4.1hp
 4.4 / 4.1m/s²

 Bar length
 Order PNC
 RRP ex VAT

 33cm / 13"
 967 69 09-13

967 69 09-15

967 69 09-18

REPLACEM	ENT CUTTING	G EQUIF	PMENT	
Model	535i XP® / 540i XP® / 540i XP® G			
Bar	30cm / 12" 35cm / 14" 40cm / 16			40cm / 16"
PNC	593 91 43-51	593 91	43-59	593 91 43-64
Chain	30cm / 12"	35cm	n / 14"	40cm / 16"
PNC	593 91 41-51	593 9	1 41-59	593 91 41-64
Technical				
Drive Links	51	5	9	64
Pitch		0.325	5" Mini	
Gauge		1.1mm .	/ .043"	
Туре		X-CUT	™ SP21G	
Cutter		Semi ch	isel mini	
File Size		4.0mm	/ 5/32"	
File Kit				
PNC		595 00	0 46-01	
Model	•	540 X	(P® III	
Bar	30cm / 12			35cm / 14"
PNC	582 20 76-45 582 20 76-52			
Chain	30cm / 12" 35cm / 14"			
PNC	585 40 42-45 585 40 42-52			
Technical				
Drive Links	45 52			
Pitch	3/8" mini			
Gauge	1.3mm / .050"			
Туре	<i>X-CUT</i> [™] S93G			
Cutter	S	emi chisel l	ow kickbac	k
File Size		4.0mm	/ 5/32"	
File Kit				
PNC		587 80) 67-01	
Model	5	50 XP® II	/ XP® G	
Bar	33cm / 13"	37cm /		45cm / 18"
PNC	582 08 69-56	582 08		582 08 69-72
Chain	33cm / 13"	37cm /	/ 15"	45cm / 18"
PNC	585 63 95-56	585.63		585 63 95-72
Technical				,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
Drive Links	56	64		72
Pitch		0.3		· -
Gauge		1.5mm		
Туре		X-CUT		
Cutter		Semi		
File Size	4.8mm / 3/16"			
File Kit				

HUSQVARNA RECOMMEND XP® Power 2 Fuel



There is no better fuel for your Husqvarna product than our alkylate fuel manufactured to unique Husqvarna specifications. XP® Power 2 is mixed with exactly 2% of our XP® 2-stroke oil giving you a cleaner, cooler and healthier engine. Read more on pages 312 - 313.

587 80 68-01

www.youtube.com/HusqvarnaUK

Weight

5.5kg

RRP inc VAT

PNC

FULL-TIME USE



Our most technically advanced range of chainsaws designed for full-time intensive use in the most demanding conditions. The XP® range are developed solely to maximise your performance offering excellent power to weight ratio, class leading ergonomics and innovative solutions which optimise performance without compromise.

Ideal for applications including:

- Professional forestry
- Logging
- Arboriculture

560 XP®



Advanced high performance mid range XP saw offering excellent ergonomics and a number of innovative features for maximising output. Ideal for forestry applications.

- X-Torq[®]
- Low Vib[®]
- RevBoost[™]
- Air Injection™
 Autotune™
- Smart Start®

Displacement	Power output	Vibration levels F/R	Weight
59.8cm ³	3.5kW / 4.8hp	4.4 / 5.3m/s ²	5.9kg
Bar length	Order PNC	RRP ex VAT	RRP inc VAT
37cm / 15"	970 50 17-15		
45cm / 18"	970 50 17-18		

560 XP® G



Advanced high performance mid range XP saw offering excellent ergonomics and a number of innovative features for maximising output. Ideal for forestry applications.

- Low Vib®
- Air Injection™
 Autotune™
- Heated Handles RevBoost[™] Displacement Vibration levels F/R Power output Weight 59.8cm³ 3.5kW / 4.8hp 4.4 / 5.3m/s² 6.1kg Order PNC RRP ex VAT RRP inc VAT Bar length 970 50 19-15 37cm / 15"
 - 45cm / 18" 970 50 19-18



Advanced high performance mid range XP saw offering excellent ergonomics, features high capacity air filter and 3/8" large barge mount. Ideal for forestry & arb applications.

- X-Torq®
- Low Vib[®]
- 3/8" large bar mount
- Air Injection[™]
-

• /	Autotune	М
-----	----------	---

Displacement	Power output	Vibration levels F/R	Weight
59.8cm ³	3.5kW / 4.8hp	3.2 / 5.0m/s ²	6.1kg
Bar length	Order PNC	RRP ex VAT	RRP inc VAT
45cm / 18"	970 50 20-18		

Visit: www.husqvarna.com/uk/chainsaws





-

562 XP® G



Advanced high performance mid range XP saw offering excellent ergonomics, features high capacity air filter and 3/8" large barge mount. Ideal for forestry & arb applications.

- X-Torg[®]
- Air Injection[™]
- Low Vib® • 3/8" large bar mount
- Autotune[™]
- Heated Handles

Displacement	Power output	Vibration levels F/R	Weight
59.8cm ³	3.5kW / 4.8hp	3.2 / 5.0m/s ²	6.3kg
Bar length	Order PNC	RRP ex VAT	RRP inc VAT
45cm / 18"	970 50 22-18		

572 XP®



Latest generation chainsaw, combining excellent ergomonics, durability, reliability with high power output, ideally suited for professional forestry and Arboriculture.

•	Χ-	Tord	٦®
---	----	------	----

 Air Injection[™] Autotune[™] II

Weight

 Low Vib[®] Soft cut out system

Displacement	Power output	Vibration levels F/R		
70.6cm ³	4.3kW / 5.85hp	5.0 / 4.1m/s ²		

/0.6cm ³	4.3kW / 5.85hp	5.0 / 4.1m/s²	6.6kg
Bar length	Order PNC	RRP ex VAT	RRP inc VAT
45cm / 18"	966 73 31-18		
50cm / 20"	966 73 31-20		
60cm / 24"	966 73 31-44		
71cm / 28"	966 73 31-48		

572 XP® G



Latest generation chainsaw, combining excellent ergomonics, durability, reliability with high power output, ideally suited for professional forestry and Arboriculture.

- X-Torg®
- Low Vib®
- Soft cut out system

• Autotune™ II Heated Handles

Air Injection[™]

,			
Displacement	Power output	Vibration levels F/R	Weight
70.6cm ³	4.3kW / 5.85hp	5.0 / 4.1m/s ²	6.8kg
Bar length	Order PNC	RRP ex VAT	RRP inc VAT
45cm / 18"	966 73 34-18		
50cm / 20"	966 73 34-20		
60cm / 24"	966 73 34-44		

REPLACEMENT CUTTING EQUIPMENT

Model		560 XP®/ XP® G			
Bar	33cm / 13"	37cm / 15"	45cm / 18"		
PNC	582 08 69-56	582 08 69-64	582 08 69-72		
Chain	33cm / 13"	37cm / 15"	45cm / 18"		
PNC	585 63 95-56	585 63 95-64	585 63 95-72		
Technical					
Drive Links	56	64	72		
Pitch		0.325"			
Gauge		1.5mm / .058"			
Туре		X-CUT [™] S35G			
Cutter		Semi chisel			
File Size		4.8mm / 3/16"			
File Kit					
PNC		587 80 68-01			
Model	56	562 / 572 XP®/ XP® G			
		50cm / 20"	60cm / 24" RSN		
Bar	45cm / 18"	500m720	0001117 24 K3N		
Bar PNC	45cm / 18 " 585 95 08-68	585 95 08-72	596 69 11-84		
PNC	585 95 08-68	585 95 08-72	596 69 11-84		
PNC Chain	585 95 08-68 45cm / 18"	585 95 08-72 50cm / 20"	596 69 11-84 60cm / 24"		
PNC Chain PNC	585 95 08-68 45cm / 18"	585 95 08-72 50cm / 20"	596 69 11-84 60cm / 24"		
PNC Chain PNC Technical	585 95 08-68 45cm / 18" 581 62 66-68	585 95 08-72 50cm / 20" 581 62 66-72	596 69 11-84 60cm / 24" 581 62 66-84		
PNC Chain PNC Technical Drive Links	585 95 08-68 45cm / 18" 581 62 66-68	585 95 08-72 50cm / 20" 581 62 66-72 72	596 69 11-84 60cm / 24" 581 62 66-84		
PNC Chain PNC Technical Drive Links Pitch	585 95 08-68 45cm / 18" 581 62 66-68	585 95 08-72 50cm / 20" 581 62 66-72 72 3/8"	596 69 11-84 60cm / 24" 581 62 66-84		
PNC Chain PNC Technical Drive Links Pitch Gauge	585 95 08-68 45cm / 18" 581 62 66-68	585 95 08-72 50cm / 20" 581 62 66-72 72 3/8" 1.5mm / .058"	596 69 11-84 60cm / 24" 581 62 66-84		
PNC Chain PNC Technical Drive Links Pitch Gauge Type	585 95 08-68 45cm / 18" 581 62 66-68	585 95 08-72 50cm / 20" 581 62 66-72 72 3/8" 1.5mm / .058" X-CUT" C85	596 69 11-84 60cm / 24" 581 62 66-84		
PNC Chain PNC Technical Drive Links Pitch Gauge Type Cutter	585 95 08-68 45cm / 18" 581 62 66-68	585 95 08-72 50cm / 20" 581 62 66-72 72 3/8" 1.5mm / .058" X-CUT" C85 Chisel	596 69 11-84 60cm / 24" 581 62 66-84		
PNC Chain PNC Technical Drive Links Pitch Gauge Type Cutter File Size	585 95 08-68 45cm / 18" 581 62 66-68	585 95 08-72 50cm / 20" 581 62 66-72 72 3/8" 1.5mm / .058" X-CUT" C85 Chisel	596 69 11-84 60cm / 24" 581 62 66-84		

HUSQVARNA RECOMMEND

XP[®] Power 2 Fuel



There is no better fuel for your Husqvarna product than our alkylate fuel manufactured to unique Husqvarna specifications. XP® Power 2 is mixed with exactly 2% of our XP® 2-stroke oil giving you a cleaner, cooler and healthier engine. Read more on pages 312 - 313.

(f) www.facebook.com/HusqvarnaUK

FULL-TIME USE



Our most technically advanced range of chainsaws designed for full-time intensive use in the most demanding conditions. The XP® range are developed solely to maximise your performance offering excellent power to weight ratio, class leading ergonomics and innovative solutions which optimise performance without compromise.

Ideal for applications including:

- Professional forestry
- Logging
- Arboriculture

592 XP®



Developed for professional forestry and tree care workers who demand the best in heavy-duty performance, reliable operation, and well-balanced manoeuvrability.

- X-Torq®
- Air Injection[™]
 Autotune[™] 3.0
- Low Vib[®]
 Flip-up filler cap

Displacement	Power output	Vibration levels F/R	Weight
92.7cm ³	5.6kW / 7.6hp	6.6 / 5.3m/s ²	7.4kg
Bar length	Order PNC	RRP ex VAT	RRP inc VAT
50cm / 20"	970 49 31-30		
60cm / 24"	970 49 31-24		
71cm / 28"	970 49 31-28		

592 XP® G



Developed for professional forestry and tree care workers who demand the best in heavy-duty performance, reliable operation, and well-balanced manoeuvrability.

- X-Torq®
- Low Vib®
- Flip-up filler cap

Autotune[™] 3.0
Heated Handles

Air Injection[™]

inp up mor oup			
Displacement	Power output	Vibration levels F/R	Weight
92.7cm ³	5.6kW / 7.6hp	6.6 / 5.3m/s ²	7.6kg
Bar length	Order PNC	RRP ex VAT	RRP inc VAT
50cm / 20"	970 49 34-50		
60cm / 24"	970 49 34-54		
71cm / 28"	970 49 34-58		

HUSQVARNA RECOMMEND

XP[®] Power 2 Fuel



There is no better fuel for your Husqvarna product than our alkylate fuel manufactured to unique Husqvarna specifications. XP® Power 2 is mixed with exactly 2% of our XP® 2-stroke oil giving you a cleaner, cooler and healthier engine. Read more on pages 312 - 313.

REPLACEMENT CUTTING EQUIPMENT

Model	592 XP® / XP® G			
Bar	50cm / 20"	60cm / 24"	71cm / 28"	
PNC	599 65 66-72	599 65 66-84	599 65 66-92	
Chain	50cm / 20"	60cm / 24"	71cm / 28"	
PNC	581 62 66-72	581 62 66-84	581 62 66-92	
Technical				
Drive Links	72	84	92	
Pitch	3/8			
Gauge	1.5mm / .058"			
Туре	Х-СИТ ^т С85			
Cutter	Chisel			
File Size	5.5mm / 7/32"			
File Kit				
PNC	586 93 85-01			



CHAINSAWS 중-

-

FULL-TIME USE

Specialist arborist chainsaws designed for professional use only. The XP® range are developed solely to maximise your performance offering excellent power to weight ratio, class leading ergonomics and innovative solutions which optimise performance without compromise.

Ideal for applications including:

- Arboriculture
- **Utilities maintenance**

T525



Powerful, low weight and compact petrol arborist chainsaw ideal for lighter arboricuture tasks including pruning.

- X-Torg® Air Injection[™] Low Vib[®] · Secondary eyelet • 1/4" carving bar • Flip-up filler cap Displacement Vibration levels F/R Power output 27cm³ 1.1kW / 1.5hp 4.9 / 5.2m/s²
 - Weight 2.7kg Bar length Order PNC RRP ex VAT RRP inc VAT 25cm / 10" 967 63 33-11



Battery powered arborist chainsaw offering petrol equivalent chainspeed. Low noise level and weatherproof (IPX4) make it ideal in noise sensitive areas.

- X-CUT[™] SP21G chain Keypad with savE[™] Low noise · Secondary eyelet
- 20m/s chain speed
- Weatherproof (IPX4)
- Voltage Motor type Vibration levels F/R Weight 36V Li-ion **BLDC Brushless** 2.0 / 2.4m/s² 2.4kg (excl. battery) RRP inc VAT Model Order PNC RRP ex VAT 30cm / 12" Unit only 967 89 39-12

T540 XP[®] III **NEW** Husqvarna

Latest generation top-handle petrol chainsaw with impressive power-to-weight ratio. Designed for full time use by arboriculture professionals.

• AutoTune™ 3.0	
-----------------	--

- Smart Start® Air Injection[™]
- Low Vib[®] • Flip-up filler cap Combined choke / stop control Displacement Power output Vibration levels F/R Weight 39cm³ 1.9kW / 2.6hp 3.5 / 3.4m/s² 3.8ka

000111	nonni zionp	0.0 / 0.111./0	o.ong	
Bar length	Order PNC	RRP ex VAT	RRP inc VAT	
30cm / 12"	970 51 79-12			
35cm / 14"	970 51 79-14			
40cm / 16"	970 51 79-16			



_

T540 XP® II



Top-handle petrol chainsaw with impressive power-to-weight ratio. Designed for full time use by arboriculture professionals.

- X-Torg®
- Air Injection[™]
- Low Vib[®]
- AutoTune[™]
- Customisable top handle

970 48 39-12

970 48 39-14

Customisable top handle		 Secondary eyelet 		
Displacement	Power output	Vibration levels F/R	Weight	
37.7cm ³	1.8kW / 2.4hp	3.5 / 4.2m/s ²	3.9kg	
Bar length	Order PNC	RRP ex VAT	RRP inc VAT	

35cm / 14"

30cm / 12"



High performance battery powered arborist chainsaw offering high chainspeed. Low noise level and weatherproof (IPX4) make it ideal in noise sensitive areas.

• X-CUT™ SP21G chain

Voltage

- Low noise
- 40cm³ petrol performance
- LED keypad with savE[™] · Secondary eyelet
- Weatherproof (IPX4)
- Vibration levels F/R Weight Motor type

36V Li-ion	BLDC Brushless	2.1 / 3.4m/s²	2.5kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
30cm / 12" Unit only	967 86 37-12		
35cm / 14" Unit only	967 86 37-14		



High performance battery powered arborist chainsaw offering high chainspeed. Low noise level and weatherproof (IPX4) make it ideal in noise sensitive areas.

- User Friendly Digital User Interface
 Heated Handles
- nsor savE™ sf (IPY /) Chain Oil Sensor Mc Efficient Dr

Weatherproof (IPX4)		Efficient Brushle	ss Motor	
Voltage Motor type		Vibration levels F/R	Weight	
	36V Li-Ion	BLDC Brushless	TBC	TBC
	Model	Order PNC	RRP ex VAT	RRP inc VAT
	30cm / 12" Unit only	970 56 81-12		
	35cm / 14" Unit only	970 56 81-14		
	40cm / 16" Unit only	970 56 81-16		

REPLACEMENT CUTTING EQUIPMENT

Model	T525	T535i XP®	T 540i XP® / XP® G		
Bar	25cm / 10"	30cm / 12"	30cm / 12"	35cm / 14"	
PNC	587 39 44-60	593 91 43-51	593 91 43-51	593 91 43-59	
Chain	25cm / 10"	30cm / 12"	30cm / 12"	35cm / 14"	
PNC	501 84 40-60	593 91 41-51	593 91 41-51	593 91 41-59	
Technical	Technical				
Drive Links	60	51	51	59	
Pitch	1/4"	0.325" Mini	0.325	" Mini	
Gauge	1.3mm / .050"	1.1mm / .043"	1.1mm /	/ .043"	
Туре	HOO	X-CUT [™] SP21G	X-CUT	" SP21G	
Cutter	Micro chisel	Semi chisel mini	i Semi chisel mini		
File Size	4.0mm / 5/32"	4.0mm / 5/32"	4.0mm / 5/32"		
File Kit	File Kit				
PNC	580 68 75-01	595 00 46-01	595 00 46-01		

REPLACEMENT CUTTING EQUIPMENT

Model	T 540 XP® II (2021 and before)	T540 XP® II (2022 onwards)	T540 XP® II (2021 and before)	T540 XP® II (2022 onwards)
Bar	30cm / 12"	30cm / 12"	35cm / 14"	35cm / 14"
PNC	582 20 76-45	593 91 43-51	582 20 76-52	593 91 43-59
Chain	30cm / 12"	30cm / 12"	35cm / 14"	35cm / 14"
PNC	585 40 42-45	593 91 41-51	585 40 42-52	593 91 41-59
Technical				
Drive Links	45	51	52	59
Pitch	3/8"	0.325" Mini	3/8"	0.325" Mini
Gauge	1.3mm / .050"	1.1mm / .043"	1.3mm / .050"	1.1mm / .043"
Туре	X-CUT " SP93G	X-CUT " SP21G	X-CUT " S93G	X-CUT " SP21G
Cutter	Semi chisel low kick back	Semi chisel mini	Semi chisel low kick back	Semi chisel mini
File Size	4.0mm / 5/32"	4.0mm / 5/32"	4.0mm / 5/32"	4.0mm / 5/32"
File Kit				
PNC	587 80 67-01	587 80 67-01	587 80 67-01	587 80 67-01

Model	T 540XP® Ⅲ			
Bar	30cm / 12"	35cm / 14"	40cm / 16"	
PNC	593 91 43-51	593 91 43-59	593 91 43-64	
Chain	30cm / 12"	35cm / 14"	40cm / 16"	
PNC	593 91 41-51	593 91 41-59	593 91 51-64	
Technical				
Drive Links	51	59	64	
Pitch		0.325" Mini		
Gauge		1.1mm / .043"		
Туре		X-CUT [™] SP21G		
Cutter	Semi chisel mini			
File Size	4.0mm / 5/32"			
File Kit				
PNC	595 00 46-01			

www.youtube.com/HusqvarnaUK



<u>_</u>

FULL-TIME USE



Specialist professional pole saws designed for the pruning and thinning of trees or cutting back thick tall hedges from the ground. Fixed length versions designed for applications where a shorter length is required and telescopic versions for maximum reach.

Ideal for applications including:

- Forestry
- Arboriculture
- Horticulture
- Utilities maintenance
- Agriculture



Robust fixed length battery pole saw designed for professional use. Lightweight and well balanced with petrol equivalent performance. Weatherproof (IPX4).

- 20m/s chain speed
- Fixed lengthLow noise
- 250cm length
 - Slimline cutting head

Li-ion 36V

Keypad with savE[™]

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	BLDC Brushless	1.0 / 0.9m/s ²	3.4kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
530iP4 Unit only	967 88 47-11		

530iPT5



Robust telescopic pole saw designed for professional use. Lightweight and well balanced with petrol equivalent performance. Weatherproof (IPX4).

 20m/s chain speed Telescopic Low noise		 Keypad with savE[™] 293 - 400cm length Slimline cutting head 	
Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	BLDC Brushless	1.0 / 1.2m/s ²	5.0kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
530iPT5 Unit only	967 88 48-11		







Robust fixed length petrol pole saw designed for professional use. Lightweight and well balanced.

• X-Torg®

• Smart Start®

- Low Vib®
 - Fixed length

240cm length		Ű	
Displacement	Power output	Vibration levels F/R	Weight
25.4cm ³	1.0kW / 1.3hp	2.9 / 3.2m/s ²	5.3kg
Bar length	Order PNC	RRP ex VAT	RRP inc VAT
30cm / 12"	967 32 94-01		

525PT5S



Robust telescopic petrol pole saw designed for professional use. Lightweight and well balanced.

• X-Torg®

Smart Start®

- Low Vib®
 - Telescopic
- 280 397cm length
- · Slimline cutting head

Displacement	Power output	Vibration levels F/R	Weight
25.4cm ³	1.0kW / 1.3hp	6.3 / 5.3m/s ²	7.0kg
Bar length	Order PNC	RRP ex VAT	RRP inc VAT
25cm / 10"	967 32 96-01		

REPLACEMENT CUTTING EQUIPMENT

Model	525P4S	530iP4 / 530iPT5 / 525PT5S	
Bar	30cm / 12"	25cm / 10"	
PNC	501 95 92-45	575 84 22-58	
Chain	30cm / 12"	25cm / 10"	
PNC	585 40 42-45	501 84 40-58	
Technical			
Drive Links	45	58	
Pitch	3/8"	1/4"	
Gauge	1.3mm / .050"	1.3mm / .050"	
Туре	X-CUT ™ S93G	HOO	
Cutter	Semi chisel	Micro chisel	
File Size	4.0mm / 5/32"	4.0mm / 5/32"	
File Kit			
PNC	587 80 67-01	580 68 75-01	

HUSQVARNA RECOMMEND

Working in wet conditions. Husqvarna rain clothing. Page 303



HUSQVARNA RECOMMEND XP[®] Power 2 Fuel





There is no better fuel for your Husqvarna product than our alkylate fuel manufactured to unique Husqvarna specifications. XP® Power 2 is mixed with exactly 2% of our XP® 2-stroke oil giving you a cleaner, cooler and healthier engine. Read more on pages 312 - 313.

_



CHAINSAWS

TECHNICAL SPECIFICATIONS

	120 II	130	135 II	435 II	440 II	445 II	450 II	
TECHNICAL SPECIFICATIONS								
Cylinder displacement, cm ³	38.2	38.2	38.2	40.9	40.9	45.7	50.2	
Power output, kW	1.4	1.5	1.6	1.6	1.8	2.1	2.4	
Sound pressure level at operators ear, dB(A)*	101	102	102	102	102	103	104	
Sound power level guaranteed (LWA) dB(A)**	113	116	116	114	114	114	115	
Equivalent vibration level (ahv, eq) front /rear handle, m/s 2***	2.1/2.7	3.7/3.5	3.7/3.5	3.8/4.2	3.8/4.2	1.9/4.9	3.1/4.9	
Chain pitch, inch	3/8 mini	3/8 mini	3/8 mini	.325	.325	.325	.325	
Recommended bar length, min-max, cm/inch	35/14	35/14	35 / 14	37 / 15	37 / 15	45 / 18	45 / 18	
Weight (excl. cutting equipment), kg	4.85	4.7	4.7	4.2	4.3	4.9	4.9	
FEATURES								
Adjustable oil pump	_	-	_	-	_	-	_	
Air Injection™	•	•	•	•	•	•	•	
AutoTune™	-	-	-	-	-	-	-	
Combined choke / stop control	•	•	•	•	•	•	•	
Fuel pump	•	•	•	•	•	•	•	
Heated carburettor	-	-	-	-	_	-	-	
Heated handles	_	-	-	-	-	-	—	
Inertia chain brake	•	•	•	•	•	•	•	
Low Vib®	•	•	•	•	•	•	•	
Magnesium crankcase	-	-	-	-	-	-	-	
Quick release air filter cover	-	•	•	•	•	•	•	
Quick-release air filter	—	-	•	•	•	•	•	
Retained bar nuts	-	-		_	_		_	
RevBoost™	—	-	_	-	—	-	_	
Side-mounted chain tensioner	—	-	•	•	•	•	•	
Smart Start®	_	-	•	-	•	•	•	
Snap-lock cylinder cover	_	-	—	•	•	•	•	
Tool-less chain tensioning	—	-	—	-	—	-	—	
TrioBrake™	_	-	-	-	-	-	—	
Visible fuel level	_	-	-	•	•	•	•	
X-Torq [®] engine	•	•	•	•	•	•	•	

• = Available (•) = Accessory - = Not available *Equivalent sound pressure level, according to ISO 22868, is calculated as the time-weighted energy total for different sound pressure levels under various working conditions. Typical statistical dispersion for equivalent sound pressure level is a standard deviation of 1 dB (A). **Noise emissions in the environment measured as sound power (LWA) in conformity with EC directive 2000/14/EC. The guaranteed sound power level includes variation in production as well as variation from the test code with 1–3 dB(A). ***Equivalent vibration level, according to ISO 22867, is calculated as the time-weighted energy total for vibration levels under various working conditions. Reported data for equivalent vibration level has a typical statistical dispersion (standard deviation) of 1 m/s².

NOMINAL POWER A new machinery directive (2006/42/EC) came into force on January 1, 2010, requiring manufacturers to declare the nominal power of engines. in kilowatts (kW). The power rating of the engines indicated is the average net power output during a normal working situations and meets applicable noise regulations (at specified rpm, see owner manual) of a typical production engine for the engine model measured to SAE standard J 1349/ISO 1585. Mass production engines may differ from this value. Actual power output for the engine installed in the final machine will depend on the operating speed, environmental conditions and other variables.



_

_

45	55 Rancher	545 II	555	565	585	540 XP III	550 XP® II	550 XP® G II	560 XP®	560 XP®G
55		50.1	59.8	70.6	86	39.1	50.1	50.1	59.8	59.8
2.6	6	2.7	3.1	3.7	5.1	1.9	3.0	3.0	3.5	3.5
10)4	106	106	105	112	103	107	107	106	106
11	14	116	118	119	119	112	117	117	118	118
3.8	8/6.9	3.7/3.6	3.2/5.0	5.2/5.3	6.6/5.3	3.7/5.1	4.4/4.1	4.4/4.1	4.4/5.3	4.4/5.3
.32	25	.325	.325/3/8	3/8	3/8	3/8 mini	.325	.325	.325/3/8	.325/3/8
45	5 / 18	33-45/13-18	33-45/13-18	45-70/18-28	45-90/18-36	30-40/12-16	33-45/13-18	33-45/13-18	33-50/13-20	33-50/13-20
5.9	9	5.3	5.9	6.5	7.5	4.1	5.3	5.5	5.9	6.1
•		•	•	•	•	•	•	•	•	•
•		•	•	•	•	•	•	•	•	•
—		•	•	•	_	•	•	•	•	•
•		•	•	•	•	•	•	•	•	•
•		•	•	•	•	•	•	•	•	•
-		_	_	_	_	-	_	•	_	•
-		-	_	_	_	-	_	•	_	•
•		•	•	•	•	•	•	•	•	•
•		•	•	•	•	•	•	•	•	•
_		•	•	•	•	•	•	•	•	•
•		•	•	•	•	•	•	•	•	•
•		•	•	•	•	•	•	•	•	•
_		•	•	•	•	•	•	•	•	•
_		_	_	_	-	_	_	_	•	•
•		•	•	•	•	•	•	•	•	•
•		•	•	•	•	•	_	_	•	•
_		•	•	•	•	_	•	•	•	•
_		-	-	_	_	_	_	-	_	_
_		_	_	_	_	_	_	_	_	_
•	• • •				•	•	•	•	•	•
•		•	•	•	•	•	•	•	•	•





CHAINSAWS

TECHNICAL SPECIFICATIONS

	562 XP® / XP G®	572 XP®	572 XP G®	592 XP / XP G®
ECHNICAL SPECIFICATIONS		_		
Cylinder displacement, cm ³	59.8	70.6	70.6	92.7
Power output, kW	3.5	4.3	4.3	5.6
Sound pressure level at operators ear, dB(A)*	106	107	107	112
Sound power level guaranteed (LWA) dB(A)**	118	120	120	119
Equivalent vibration level (ahv, eq) front /rear handle, m/s ^{2***}	3.2/5.0	5.0/4.1	5.0/4.1	6.6/5.3
Chain pitch, inch	3/8	3/8	3/8	3/8
Recommended bar length, min-max, cm/inch	37-70/15-28	37-70/15-28	37-70/15-28	45-90/18-36
Weight (excl. cutting equipment), kg	6.1/6.3	6.6	6.8	7.4/7.6
EATURES				
Adjustable oil pump	•	•	•	•
Air Injection™	•	•	•	•
AutoTune™	•	•	•	•
Combined choke / stop control	•	•	•	•
Fuel pump	•	•	•	•
Heated carburettor	-/•	-	•	-/•
Heated handles	- / •	-	•	-/•
Inertia chain brake	•	•	•	•
Low Vib®	•	•	•	•
Magnesium crankcase	•	•	•	•
Quick release air filter cover	•	•	•	•
Quick-release air filter	•	•	•	•
Retained bar nuts	•	•	•	•
RevBoost™	•	-	—	
Side-mounted chain tensioner	•	•	٠	•
Smart Start®	•	•	•	•
Snap-lock cylinder cover	•	•	•	•
Tool-less chain tensioning	_	_	—	_
 TrioBrake™	_	-	—	_
Visible fuel level	•	•	•	•
X-Torq [®] engine	•	•	•	•

• = Available (•) = Accessory - = Not available *Equivalent sound pressure level, according to ISO 22868, is calculated as the time-weighted energy total for different sound pressure levels under various working conditions. Typical statistical dispersion for equivalent sound pressure level is a standard deviation of 1 dB (A). **Noise emissions in the environment measured as sound power (LWA) in conformity with EC directive 2000/14/EC. The guaranteed sound power level includes variation in production as well as variation from the test code with 1-3 dB(A). *** Equivalent vibration level, according to ISO 22867, is calculated as the time-weighted energy total for vibration levels under various working conditions. Reported data for equivalent vibration level has a typical statistical dispersion (standard deviation) of 1 m/s²

ALWAYS USE GENUINE HUSQVARNA LUBRICANTS AND SPARE PARTS FOR YOUR CHAINSAW

These high quality spare parts and lubricants are developed to facilitate the care and maintenance of your Husqvarna equipment and enable trouble-free operation and storage. Husqvarna recommend regular service done by qualified technicians using only Genuine Husqvarna original or recommended spare parts. This will support the product's performance and lifetime. See your owner's manual or consult your Authorised Husqvarna dealer if any uncertainty occurs.

NOMINAL POWER A new machinery directive (2006/42/EC) came into force on January 1, 2010, requiring manufacturers to declare the nominal power of engines, in kilowatts (kW). The power rating of the engines indicated is the average net power output during a normal working situations and meets applicable noise regulations (at specified rpm, see owner manual) of a typical production engine for the engine model measured to SAE standard J 1349/ISO 1585. Mass production engines may differ from this value. Actual power output for the engine installed in the final machine will depend on the operating speed, environmental conditions and other variables.

|--|

_

TOP HANDLE CHAINSAW	T525	T540 XP II	T540 XP III
TECHNICAL SPECIFICATIONS			
Cylinder displacement, cm ³	27.0	37.7	39.1
Power output, kW	1.1	1.8	1.9
Sound pressure level at operators ear, dB(A)*	98	104.0	102
Sound power level guaranteed (LWA) dB(A)**	111	116	112
Equivalent vibration level (ahv, eq) front/rear handle, m/s ^{2***}	4.9/5.2	3.5 / 4.2	3.5/3.4
Chain pitch, inch	1/4	3/8	.325" mini
Recommended bar length, min- max, cm/inch	25/10	30-35/12-14	30-40/12-16
Weight (excl. cutting equipment), kg	2.7	3.9	3.8

POLE SAWS	525P4S	525PT5S			
TECHNICAL SPECIFICATIONS					
Cylinder displacement, cm ³	25.4	25.4			
Power output, kW	1.0	1.0			
Sound pressure level at operators ear, dB(A)*	91	89			
Sound power level guaranteed (LWA) dB(A)	107	107			
Equivalent vibration level (ahv, eq) front /rear handle, m/s ^{2**}	2.9/3.2	6.3/5.3			
Chain pitch, inch	3/8 LP	1/4			
Recommended bar length, min-max, cm/inch	25-30/10-12	25-30/10-12			
Max. length with cutting equipment, cm	240	397			
Weight (excl. cutting equipment), kg	5.3	7.0			
FEATURES					
Auto-return stop switch	•	•			
Chain lubrication	•	•			
Chain tensioner	•	•			
Fuel pump	•	•			
Rear impact guard	•	•			
Stand alone starter	•	•			
Telescopic tube	-	•			

FEATURES

FEATURES			
Adjustable oil pump	•	•	•
Air Injection™	•	•	•
AutoTune™	—	•	•
Fuel pump	•	•	•
Horizontal rope eye let	•	•	•
Inertia chain brake	•	•	•
Low Vib®	•	•	•
Magnesium crankcase	—	•	•
Quick release air filter cover	•	•	•
Quick-release air filter	•	•	—
Visible fuel level	•	•	—
X-Torq [®] engine	•	•	•

• = Available (•) = Accessory - = Not available *Equivalent sound pressure level, according to ISO 22868, is calculated as the time-weighted energy total for different sound pressure levels under various working conditions. Typical statistical dispersion for equivalent sound pressure level is a standard deviation of 1 dB (A). **Noise emissions in the environment measured as sound power (LWA) in conformity with EC directive 2000/14/EC. The guaranteed sound power level includes variation in production as well as variation from the test code with 1-3 dB(A). **Equivalent vibration level, according to ISO 22867, is calculated as the time-weighted energy total for vibration levels under various working conditions. Reported data for equivalent vibration level has a typical statistical dispersion (standard deviation) of 1 m/s².

ELECTRIC CHAINSAW	420EL
TECHNICAL SPECIFICATIONS	
Voltage, V	230
Power rating, W	2000
Vibrations front /rear handle (a hv, eq), m/s ² *	5.2/3.9
Weight (excl. cutting equipment and cable), kg	4.7
Chain pitch, inch	3/8"
Recommended bar length, min-max, cm / inch	35 - 40 / 14 - 16
FEATURES	
Electronic SoftStart™	•
Inertia chain brake	•
Overspeed protection	•
Window for oil level	•

• = Available (•) = Accessory — = Not available * Equivalent vibration level, according to ISO 22867, calculated as the time-weighted energy total for vibration levels at different operating conditions. Reported data for equivalent vibration level has a typical measurement of dispersion (standard deviation) of 1 m/s².



GIVE YOUR CHAINSAWEXTRA DERFORMANCE



Husqvarna bars and chains are built to the same high standard as our saws. By combining high quality materials with product development based on the demands of forestry professionals, we can specify the bar and chain combinations that deliver maximum efficiency and cutting performance with your Husqvarna chainsaw. Our **X-CUT**^{**} chains and **X-FORCE**^{**} bars are developed with our saws, giving you the optimal total performance you need to get the most out of your chainsaw.

BARS & CHAINS



Husqvarna manufactured bars and chains have been developed to work optimally with our chainsaws, increasing your output and



60



cutting efficiency.

HUSQVARNA FOR YOUR HUSQVARNA

Our bars and chains offer you a product with easier maintenance and a design that gives longer product lifetime with minimal downtime.

TOUGHER AND MORE DURABLE

Improved durability across our new bars and chains give an extended product lifetime and minimal down time which reduces overall cost of ownership and increases productivity.

尚Husqvarna 572 XF

10% MORE EFFICIENT

After rigorous testing, our *X-CUT*[™] SP33G chain has been found to give 10% more cutting efficiency* increasing your output and productivity.

MADE IN SWEDEN

Our X-CUT[™] chains have been researched, designed and manufactured in our state-of-the-art factory in Huskvarna, Sweden** to give optimal output with our chainsaws.



* Compared to our H30 chain **SP21G not manufactured in Sweden 





MINIMUM DOWNTIME, MAXIMUM RESULTS

Our **X-CUT**" chains are the first ever saw chain to be developed, designed and manufactured by Husqvarna, in Sweden where our chainsaws are developed and tested. Husqvarna **X-CUT**" is designed to maximise your output, allowing you to work harder for longer without interruptions.

MORE RUN TIME AND LESS MAINTENANCE


Cutters, materials and manufacturing processes are refined to the extreme, giving the **X-CUT**" chain outstanding sharpness out of the box, and even more importantly — sharpness that lasts considerably longer before filing is needed.

GOLDEN TIE STRAP

Thanks to the intuitive golden tie strap function, you easily locate the starting point, simplifying the filing of the chain.

BETTER RESULTS, EASIER WORK

X-CUT^{**} is made for making faster cuts, and it's ready to be used straight out of the box. This improves your efficiency – and your results. The smooth cutting reduces the feed force needed, making the work easier on your body.

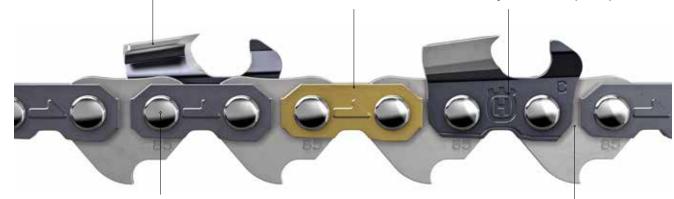

LESS ADJUSTMENTS AND LESS RISK OF DAMAGE

The **X-CUT**^{**} chain is pre-stretched at the factory so you can work longer before re-tensioning is needed. No unnecessary chain tension required. The risk of damaging the cutting system with a slack chain is also decreased.

X-CUT[™] CHAIN



HUSQVARNA X-CUT SP33G

Semi-chisel pixel .325" 1.3mm chain developed and manufactured by Husqvarna. Low kick guard, narrow kerf, low stretch and bumper drive link. Developed for demanding professional use on mid-size chainsaws, up to 55cm³. Original equipment on most Husqvarna 400 series chainsaws.



HUSQVARNA X-CUT ** SP21G

SP21G is a semi chisel .325" mini 1.1mm chain especially developed to increase the cutting speed and efficiency for full-time professional use battery chainsaws. The chain is energy efficient and the optimised geometry delivers a consistently smooth cut, excellent bore cut as well as improved handling and manoeuvrability.

GET THE PERFORMANCE PACKAGE FOR YOUR HUSQVARNA CHAINSAW

All of our **X-CUT**^{**} chains are tested and developed with our chainsaws, ensuring they give you maximum performance and the best cutting efficiency when used with our saws.

Read more about our bars and chains on our website: www.husqvarna.com/uk/parts-for-chainsaws/

LESS COST AND LESS SERVICE

A carefully balanced combination of construction, materials and processes mean excellent, dynamic durability. Wear on the cutting system is reduced — and so is the need for service.



HUSQVARNA X-CUT S93G

The semi chisel 3/8" mini 1.3mm S93G chain is developed to fit smaller chainsaws like the 100 Series or arborist top-handle saws. Optimised geometry and grinding provides high cutting speed. High cutting efficiency balanced against the available power from the chainsaw will enable a smooth and precise cut.



HUSQVARNA X-CUT C85

An advanced, full chisel, high performance 3/8" 1.5mm chain for full-time professional forestry saws. With its outstanding durability and cutting efficiency, a sharpness that lasts and low stretch, it gives you better results, less need for maintenance and lower costs.



HUSQVARNA X-CUT S35G NEW

Semi chisel .325" 1.5mm chain, especially suited for demanding everyday professional use. A really robust chain with a sharpness that lasts, an outstanding durability, low stretch and a high cutting efficiency, it's made to make your output better than ever.

The X-CUT C85 is the sharpest and most durable low stretch chain I have ever used. The quality and quantity of wood chips on the ground speak for themselves!"

Andy Campbell - H-TEAM Ambassador

USING DIFFERENT CHAINS

Husqvarna offers a wide range of chains for different needs. Use the chart below to find the recommended chain for your chainsaw:

РІТСН	RECOMMENDED cm ³	HUSQVARNA REF	CUTTER TYPE			
1/4"	Pole saws, carving, battery chainsaws	HOO	Micro chisel			
3/8" Mini Pixel	Battery chainsaws	H38	Chamfer chisel low kickback			
.325" Mini	Battery chainsaws	X-CUT [™] SP21G	Mini - semi chisel			
3/8" Mini	up to 40cc / Arborist chainsaws	X-CUT ™ S93G	Semi chisel low kickback			
Pixel .325"	40cc - 50cm ³	X-CUT [™] SP33G	Pixel - semi chisel			
.325"	50cc - 60cm ³	H25	Semi chisel			
.325"	50cc - 60cm ³	X-CUT [™] S35G NEW	Semi chisel			
3/8"	60cc - 95cm ³	X-CUT ™ C85	Chisel			
.404"	95cc - 120cm ³	H64	Chisel			

CHAIN REELS

ITEM	PNC
100' H21 Chisel 0.325" 1.5mm	503 30 57-01
100' H25 Semi Chisel 0.325" 1.5mm	503 30 55-01
100' X-CUT'' S35G Semi Chisel 0.325" 1.5mm	585 63 95-01
100' H28 Micro Chisel 0.325" 1.6mm	503 30 03-22
100' X-CUT" SP33G Pixel - Semi Chisel 0.325" 1.3mm	581 64 31-01
100' X-CUT" S93G Semi Chisel Low Kickback 3/8" 1.3mm	585 40 42-01
100' H38 Chamfer Chisel 3/8" 1.1mm	581 80 79-01
100' X-CUT" C85 Chisel 3/8" 1.5mm	581 62 66-01
100' H45 Chisel 3/8" 1.6mm	503 30 88-01
100' H64 Micro Chisel 0.404" 1.6mm	503 30 64-01



DESIGNED BY HUSQVARNA FOR YOUR HUSQVARNA

X-FORCE^{**} is Husqvarna's answer to the challenge for the perfect guide bar – that is both lightweight and low-maintenance to minimise your burden, yet durable enough to withstand tough work over long time. Husqvarna **X-FORCE**^{**} guide bars are developed alongside Husqvarna **X-CUT**^{**} chains, optimised for Husqvarna chainsaws. The result is a cutting system that makes your chainsaw perform on an entirely new level – delivering a fast, precise kerf with minimal friction loss.

PROLONG YOUR BAR AND CHAIN LIFE

Always use Husqvarna chain oil. Incorrect use of chain oil is a common source of damage to saws and tends to lead to rapid wear of the bar, or the chain jamming or derailing. Our full range of chain oils can be found on page 315.



KEEPING STANDARDS

创Hustvama


Testing and fulfilling ISO, EN and ANSI standards and internal standards is a priority in the development of new Husqvarna accessories. Regular testing during production ensures lasting quality.

6

HUSQVARNA XP® POWER 2 FUEL DEVELOPED SPECIFICALLY FOR HUSQVARNA TWO-STROKE ENGINES

There is no better fuel for your Husqvarna chainsaw than our XP® Power 2 manufactured to unique Husqvarna specifications. Conveniently pre-mixed with exactly 2% of Husqvarna XP® synthetic two-stroke oil, it provides efficient combustion leaving a cleaner, cooler, healthier engine with a minimum of harmful substances in the emissions. It also prevents inner corrosion, makes starting easier, reduces the need for service and minimises downtime. VEF approved.

68

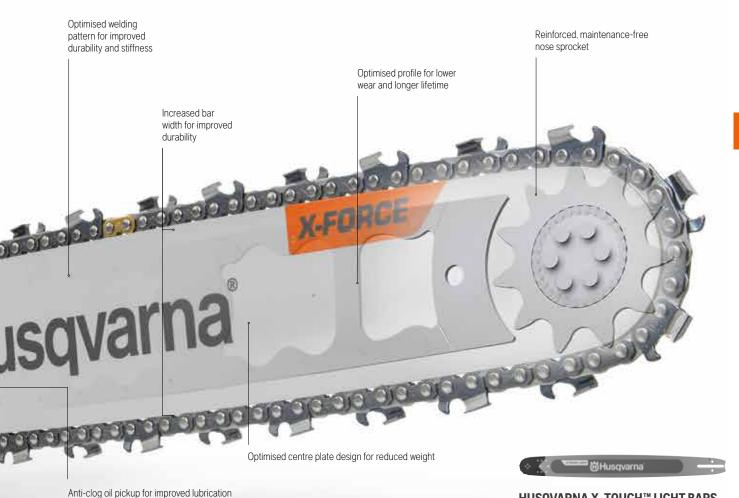

USING DIFFERENT BARS




X-FORCE " BARS

The **X-FORCE**^{**} laminated bars offer easier maintenance and increased productivity. Depending on the model, these benefits come from features such as updated profiles, larger nose sprocket, cutouts in the centre plate, additional bearings, supported shields, and the removal of the grease hole. Available in 3/8" (15–20"), 3/8" Mini (12–14") and .325" (13–20").



LAMINATED BARS WITH NOSE SPROCKET

The gentle curve and small nose radius reduce the risk of kickback and facilitates good cutting control. Coated bars to protect against scratches and corrosion. Available in 3/8" Mini (10–16").



HUSQVARNA X-TOUGH™ BARS WITH REPLACEABLE SPROCKET NOSE

Solid RSN bar with great durability and robustness. The load is transferred to the highquality roller bearing. The bars are coated to protect against scratches and corrosion. Replaceable tip is available as a spare part. Available in 3 /8" (18–28").



CARVING BAR - SMALL MOUNT

Carving bars have a smaller nose radius and are suitable for sculpting and other precision work. Available in 1/4" (10-12").

HUSQVARNA X-TOUGH™ LIGHT BARS WITH REPLACEABLE SPROCKET NOSE

A lightweight solid RSN bar. Improves the manoeuvrability while maintaining durability and robustness. The load is transferred to the high-quality roller bearing. Wear-resistant paint protects against scratches and corrosion. Replaceable tip is available as a spare part. Available in 3 /8" (20–36").



HUSQVARNA X-TOUGH[™] BARS WITH HARD NOSE

Recommended for use with long bars to reduce load on the bar tip. The load is transferred to the high-quality roller bearing. The bars are coated to protect against scratches and corrosion. Replaceable tip is available as a spare part Available with 3 / 8" chain pitch in lengths 18 – 28"



HUSQVARNA X-PRECISION™ BARS

The X-Precision[™] bars are designed specifically for use with the X-Cut[™] SP21G chain on batterypowered professional chainsaws. The optimized overall geometry and small nose radius provide efficient cutting with precise control, excellent bore cutting properties and reduced risk of kickback. Available in .325"mini (10 – 16").



66

BARS & CHAINS

BAR & CHAIN GUIDE

SMALL BAR MOUNTING POINT													LARGE BAR MOUNTING POINT										BARS															
		1525	1435	T540 XP $^{\circ}$ II (2021 and earlier models)	T540 XP®II (2022+ models)	327P4 / 327P5X / 525P4S	327PT5S / 525PT5S	420EL / 321EL	136Li / 120i	436Li / 536Li XP [®]	535i XP® / 540i XP®	T536Li XP [®]	T535i XP $^{\odot}$ / T540i XP $^{\odot}$ / T540 XP $^{\circ}$ III	136 / 141 / 137 / 142	235 / 236 / 240 / 236e / 240e	120 / 130 / 135 / 140	435 / 435e / 440 / 440e	340i	445 / 445e / 450	545 / 550 XP [*] / 353 / 346 XP [*]	357 XP*	455	555 / 560 XP [®]	540 XP [®] III	562 XP [®]	281 XP [®] / 288 XP [®] / 394 XP [®]	365 / 372 XP [®]	565 / 572 XP [*]	576 XP [°] / 575 XP [°] / 570	385 XP° / 390 XP°	395 XP [®]	3120 XP [*]	585	592 XP [®] / 592 XP [°] G	BAR LENGTH INCH / cm	CHAIN PITCH INCH	GAUGE INCH / mm	
	LAN •	/IIN/	ATE	DB/	AR V	VITH	1 NO •)SE \	WHE	EL																						1			10 / 25	1/4	.050 / 1.3	
			•			•																													10 / 25 10 / 25 12 / 30	3/8 3/8	.050 / 1.3 .050 / 1.3 .050 / 1.3	
															•	•		•																	14 / 35	3/8	.050 / 1.3	
╞	+							•	•	•	-	•																					-		16 / 40 12 / 30	3/8	.050 / 1.3 .043 / 1.1	
╞	+							\vdash		•		•				_																	\vdash		12 / 30	3/8	.043/1.1	
	0.32	25"	Х-	PRE	CISI	ON	LAN	IINA	TED	BA	R																											
											•		•																						10 / 25	0.325	.043 / 1.1	
-	+			-	•	-	-	-			•		•			_														-	-		\vdash		12 / 30 14 / 35	0.325	.043/11	
┢	+				-			-			•		•			_																	\vdash		16 / 40	0.325	.043/1.1	
	0.32	25"	X	FO	RC	E "	LAN	IINA	TED	BA	R																											
								_			_					_	•		•	0													-		13 / 33	0.325	.050 / 1.3	
╞	+			-		-	-	-		<u> </u>	-	-		•		_	•		•	0 0									-	-	-	-	-		15 / 38 18 / 45	0.325	.050 / 1.3	
┢	+							\vdash			-					_			•	•	•	•	•										\vdash		13 / 33	0.325	.058 / 1.5	
ľ								\square												•	•	•	•										\vdash		15 / 38	0.325	.058 / 1.5	
																				•	•	•	•												18 / 45	0.325	.058 / 1.5	
	2/0							AMIN														•	•												20/50	0.325	.058 / 1.5	
	5/0					P K				ם ש <u>:</u>													•												15 / 38	3/8	.058 / 1.5	
																							•												18 / 45	3/8	.058 / 1.5	
																							•												20 / 50	3/8	.058 / 1.5	
+	_			-				-																	•	•	•	•	•				-		15/38	3/8	.058 / 1.5	
╞	+	_						-																	•	•	•	•	•	•	•		\vdash		18 / 45 20 / 50	3/8	.058 / 1.5	
	3/8	" X·	-T0	UGH	BA	R (R	EPI	ACE	ABI	LE S	PRO	CKE	T N	DSE)											-	-	-	-			-							
																																	•		20/50	3/8	.058 / 1.5	
																																	•		24/60	3/8	.058 / 1.5	
	3/8	" X.	-то	UGH		HT	BAR	R (RE		CF/	ABI F	SP	ROC	KFT	NOS	SF)																	•		28 / 70	3/8	.058 / 1.5	
																																		•	20/50	3/8	.058 / 1.5	
																																		•	24/60	3/8	.058 / 1.5	
																																	-	•	28 / 70	3/8	.058 / 1.5	
┢	+	_				<u> </u>		\vdash			<u> </u>					_																	\vdash	•	32 / 80 36 / 90	3/8	.058 / 1.5 .058 / 1.5	
	3/8	" M	INI	X-F	OF	CE	'™ P	RO	LAN	IINA	TED	BA	R																						00,00	3, 0		
				•																				•											12 / 30	3/8	.050 / 1.3	
				•																				•											14 / 35	3/8	.050 / 1.3	
	501	ID F	BAR	WI	 _	REPL	AC	EAB	E N	 OSF	WH	EEL												•											16 / 40	3/8	.050 / 1.3	
																									•	•	•	•	•	•	•				24/60	3/8	.058 / 1.5	
																									0	0	0	0	0	•	•				28 / 70	3/8	.058 / 1.5	
	50L	.ID E	BAR																													•			30 / 75	0.404	.063/1.6	
╞	+			-		-	\vdash	\vdash		-	-											-										•			36 / 90	0.404	.063 / 1.6	
Ē																																•			42/105	0.404	.063 / 1.6	
			NG	BAR																															40.1			
╞	\rightarrow	•		-			-	-	-	•	-	•				_								-											10 / 25 12 / 30	1/4	.050 / 1.3	
			iser	l I soli	I ition	1 1 (au	ideli	l ine o	nlv)	-	L Car	-	l	ution	but	not	ontir	∟ nal (auic	lelin		L Iv)		<u> </u>											12/30	1/ 4		

• Optimised solution (guideline only) • Capable solution but not optimal (guideline only)

60

			CHAINS						FILE KITS		
BAR	PRICE EX. VAT	PRICE INC. VAT	CHAIN	ТҮРЕ	CUTTER	DRIVE LINKS	PRICE EX. VAT	PRICE INC. VAT	FILE KIT	FILE SIZE	
575 84 22-58			501 84 40-58	HOO	MICRO CHISEL	58			580 68 75-01	4.0mm / 5/32"	
501 95 92-40			585 40 42-40	<i>Х-СИ</i> Т [™] S93G	SEMI CHISEL LOW KICKBACK	40			587 80 67-01	4.0mm / 5/32"	X-CUT [™] S93G
501 95 92-45			585 40 42-45	х-сит ~ S93G	SEMI CHISEL LOW KICKBACK	45			587 80 67-01	4.0mm / 5/32"	Replaces H37
501 95 92-52			585 40 42-52	х-сит ~ S93G	SEMI CHISEL LOW KICKBACK	52			587 80 67-01	4.0mm / 5/32"	ເວລີເວັດແຕ່ດ້ວ
501 95 92-56			585 40 42-56	<i>Х-СИТ</i> ~ S93G	SEMI CHISEL LOW KICKBACK	56			587 80 67-01	4.0mm / 5/32"	****
582 20 74-45			581 80 79-45	H38	CHAMFER CHISEL LOW KICKBACK	45			-	4.5mm	
582 20 74-52			581 80 79-52	H38	CHAMFER CHISEL LOW KICKBACK	52			· ·	4.5mm	
		1									
593 91 43-46			593 91 41-46	X-CUT" SP21G	MINI - SEMI CHISEL	46			595 00 46-01	4.0mm / 5/32"	X-CUT [™] SP21G
593 91 43-51			593 91 41-51	X-CUT [®] SP21G	MINI - SEMI CHISEL	51			595 00 46-01	4.0mm / 5/32"	-
593 91 43-59			593 91 41-59	X-CUT [~] SP21G	MINI - SEMI CHISEL	59 64			595 00 46-01	4.0mm / 5/32"	de de de de
 593 91 43-64		 	593 91 41-64	X-CUT ~ SP21G	MINI - SEMI CHISEL	64			595 00 46-01	4.0mm / 5/32"	
582 07 53-56			5816431-56	X-CUT" SP33G	PIXEL - SEMI CHISEL	56			586 93 34-01	4.8mm / 3/16"	X-CUT [™] SP33G
582 07 53-64			58164 31-64	х-сит [.] SP33G	PIXEL - SEMI CHISEL	64			586 93 34-01	4.8mm / 3/16"	Replaces H30
582 07 53-72			58164 31-72	х-сит [•] SP33G	PIXEL - SEMI CHISEL	72			586 93 34-01	4.8mm / 3/16"	0000000000
582 08 69-56			585 63 95-56	X-CUT" \$35G	SEMI CHISEL	56			587 80 68-01	4.8mm / 3/16"	
582 08 69-64			585 63 95-64	X-CUT" \$35G	SEMI CHISEL	64			587 80 68-01	4.8mm / 3/16"	X-CUT ^{**} S35G
582 08 69-72			585 63 95-72	Х-СИТ [~] S35G	SEMI CHISEL	72			587 80 68-01	4.8mm / 3/16"	Replaces H25
582 08 69-80			585 63 95-80	х-сит ~ \$35G	SEMI CHISEL	80			587 80 68-01	4.8mm / 3/16"	000,0000
585 94 34-56			581 62 66-56	х-сит С85	CHISEL	56			586 93 85-01	5.5mm / 7/32"	
585 94 34-68			581 62 66-68	х-сит ~ С85	CHISEL	68			586 93 85-01	5.5mm / 7/32"	X-CUT" C85
585 94 34-72			5816266-72	х-сит ~ С85	CHISEL	72			586 93 85-01	5.5mm / 7/32"	Replaces H42
585 95 08-56			5816266-56	х-сит ~ С85	CHISEL	56			586 93 85-01	5.5mm / 7/32"	network and
585 95 08-68			581 62 66-68	х-сит ~ С85	CHISEL	68			586 93 85-01	5.5mm / 7/32"	· · · · ·
585 95 08-72			5816266-72	х-сит ~ С85	CHISEL	72			586 93 85-01	5.5mm / 7/32"	
											X-CUT ** C85
596 69 11-72			5816266-72	Х-СИТ ~ С85	CHISEL	72			586 93 85-01	5.5mm / 7/32"	Replaces H42
596 69 11-84		ļ	5816266-84	Х-СИТ ™ С85	CHISEL	84			586 93 85-01	5.5mm / 7/32"	างมีหลังเป็นมา
596 69 11-92			5816266-92	Х-СИТ С85	CHISEL	92			586 93 85-01	5.5mm / 7/32"	. An An An An
500.05.00.70		1	501.00.00.70		014051	70			500.00.05.01	5.5 (7/00)	
599 65 66-72			5816266-72	X-CUT C85	CHISEL	72			586 93 85-01	5.5mm / 7/32"	X-CUT ™ C85
599 65 66-84			5816266-84	X-CUT [®] C85	CHISEL	84 92			586 93 85-01	5.5mm / 7/32"	Replaces H42
599 65 66-92 599 65 66-05			581 62 66-92 581 62 66-05	Х-СИТ [~] С85 Х-СИТ [~] С85	CHISEL	92 105			586 93 85-01 586 93 85-01	5.5mm / 7/32" 5.5mm / 7/32"	Topos ellar
599 65 66-15			581 62 66-15	X-CUT C85	CHISEL	115			586 93 85-01	5.5mm / 7/32"	
333 03 00 13			30102 00 13	x 007 000	OHIOLE	115			300 30 03 01	3.511117 1762	
582 20 76-45			585 40 42-45	X-CUT [™] S93G	SEMI CHISEL LOW KICKBACK	45			587 80 67-01	4.0mm / 5/32"	
582 20 76-52			585 40 42-52	х-сит ~ \$93G	SEMI CHISEL LOW KICKBACK	52			587 80 67-01	4.0mm / 5/32"	X-CUT [™] S93G
582 20 76-56			585 40 42-56	х-сит ~ \$93G	SEMI CHISEL LOW KICKBACK	56			587 80 67-01	4.0mm / 5/32"	
596 69 11-84		ļ	5816266-84	Х-СИТ ™ С85	CHISEL	84			586 93 85-01	5.5mm / 7/32"	X-CUT [™] C85
596 69 11-92			5816266-92	х-сит ~ С85	CHISEL	92			586 93 85-01	5.5mm / 7/32"	
596 69 10-92			501 84 31-92	H64	CHISEL	92			505 69 81-92	5.5mm / 7/32"	
596 69 10-04			501 84 31-04	H64	CHISEL	104			505 69 81-92	5.5mm / 7/32"	
596 69 10-24			501 84 31-24	H64	CHISEL	124			505 69 81-92	5.5mm / 7/32"	
587 39 44-60			501 84 40-60	HOO	MICRO CHISEL	60			580 68 75-01	4.0mm / 5/32"	
587 39 44-68			5018440-60	HOO	MICRO CHISEL	68			580 68 75-01	4.0mm / 5/32"	
 30, 33 44-00			3010440-00		WIGNU GHIJEL	00			303 00 73-01	T.OMITT / J/ J/	

FILING EQUIPMENT



A sharp chain is as important as a powerful engine. For your chainsaw to operate effectively, safely and with precision it is vital to have a sharp chain. How often it needs to be sharpened depends on how frequently you use it. A good indication of the condition of your chain is the appearance of the wood chips. A sharp chain will produce fine, even wood chips, while a dull chain generates sawdust. You'll need a round file, a flat file and a filing gauge to file a chain. We also recommend that you use a stump vise to hold the bar, leaving both hands free for filing.



FILING THE CUTTING TEETH File using light and even pressure, with gentle pushing strokes, parallel to the gauge. Try to get the same length of all cutters.

INTENSIVE ROUND CUT FILES

Designed for optimal cutting performance and longer lifetime.



Item	Order PNC
4.0mm - 3 pack	597 35 48-01
4.0mm - 12 pack	597 35 48-02
4.5mm - 3 pack	597 35 55-01
4.8mm - 3 pack	597 35 58-01
4.8mm - 12 pack	597 35 58-02
5.5mm - 3 pack	597 35 61-01
5.5mm - 12 pack	597 35 61-02





FILE HANDLE



Patented file locking system. Fits all our files. 25° and 30° guides ensures correct file angling.

Item File handle - Round files Ø 4.5-5.5mm File handle - Flat files **Order PNC** 505 69 78-01 505 69 78-10



FILING THE DEPTH GAUGE File all the way down to the gauge. If you file the depth gauge without a tool you, risk filing them too far down and the chain will produce chips which are too thick.





FILE GAUGES



that give the correct filing angles. Use together with our round files.

Item .325" H25 .404" H64 1/4" H00 3/8" mini H36 3/8" mini pixel H38

Order PNC 505 69 81-10 505 69 81-15 505 69 81-18 505 24 37-01 579 55 88-01

Specifically designed file gauges

COMBINATION GAUGES



Our combination gauges are specifically designed with a file gauge and depth gauge setter together in one tool. Use together with our round and flat files for a correct filing angle.

60

Item H00 1/4" 0.325" Pixel 325 X-CUT" SP33G 0.325" Mini *x-cut*" SP21G H25.325" 1.5mm 0.325" 1.5mm **X-CUT" S35G** NEW H42 3/8" 1.5mm Full chisel 3/8" **x-cut**" C85 H51/54/58 3/8" 1.5mm

Order PNC 580 68 74-01 505 69 81-08 586 93 84-01 595 00 47-01 505 69 81-09 587 80 91-01 505 24 35-01 586 93 86-01 575 99 15-01

FILE KITS



Complete filing kit with a file handle, combination gauge or a file gauge and depth gauge, two round files and one flat file.

DEPTH GAUGES



Specifically designed file gauges that give the correct filing angles. Use together with our flat files.

Item	Order PNC
3/8"	505 69 81-01
3/8" mini	505 69 81-03
.325"	505 69 81-00
.404"	505 69 81-02

HUSQVARNA RECOMMEND

X-Guard Bio Chain Oil



Keep your chain lubricated with our NEW X-Guard Bio Chain Oil with improved formula giving superior lubrication performance even in extreme conditions. Excellent antioxidation properties protect the bar and chain during storage. Page 315

NEW

Item 0.325" 0.325" Pixel 0.325" Pixel *x-cut*™ SP33G 0.325" Mini x-cut" SP21G 0.404" 3/8" X-CUT" C85 1/4" HOO 3/8" 3/8" mini 3/8" X-CUT" S93G 0.325" X-CUT" S35G NEW 3/8" mini H37

Order PNC					
505 69 81-25					
505 69 81-27					
586 93 34-01					
595 00 46-01					
505 69 81-92					
586 93 85-01					
580 68 75-01					
505 69 81-30					
505 69 81-38					
587 80 67-01					
587 80 68-01					
579 65 36-01					
505 69 81-20					

STUMP VISE



Clearing Saw Blade

To fasten the chainsaw in a secure position when filing. Made of forged steel.

Order PNC 505 66 52-56 RRP ex VAT RRP inc VAT



FORESTRY AND ARBORIST TOOLS

FORESTRY TOOLS



TOOL BELT FLEXI – COMBI KIT



A flexible and ergonomic tool belt with excellent weight distribution and adjustable, one-hand-release belt buckle specially developed for forestry work. Intuitive and easy to personalise with easily attached holders, pockets and harness. Tool belt FLEXI. Harness. Combi holster with wedge pocket. File and combi-tool holder. Universal bag. Universal tool holder. Combi holster.

Order PNC	RRP ex VAT	RRP inc VAT
593 83 72-01		

ACCESSORIES



TOOL BELT FLEXI – CARRIER KIT



A flexible and ergonomic tool belt with excellent weight distribution and adjustable, one-hand-release belt buckle specially developed for forestry work. Intuitive and easy to personalise with easily attached holders, pockets and harness. Tool belt FLEXI. Harness. Accessory bag. File and combi-tool holder. Universal bag. Carrier hook. Wedge pocket.

Order PNC	RRP ex VAT	RRP inc VAT
593 83 72-03		

TOOL BELT FLEXI – WEDGE KIT



A flexible and ergonomic tool belt with excellent weight distribution and adjustable, one-hand-release belt buckle specially developed for forestry work. Intuitive and easy to personalise with easily attached holders, pockets and harness. Tool belt FLEXI. Harness. Wedge pocket. File and combi-tool holder. Universal bag. Universal tool holder. Combi holster with wedge pocket.

Order PNC	RRP ex VAT	RRP inc VAT
593 83 72-02		

1. TOOL BELT FLEXI

A flexible and ergonomic tool belt with excellent weight distribution and adjustable, one-hand-release belt buckle. 593 83 74–01

2. HARNESS FOR TOOL BELT FLEXI

Ergonomic design together with a chest strap evens the weight over the shoulders. $593\,83\,76{-}01$

3. COMBI HOLSTER

Combi holster for lifting tong or lifting hook plus eyelets for measuring tape. 593 83 83–01

4. COMBI HOLSTER WITH WEDGE POCKET

Combi holster for lifting tong or lifting hook plus a pocket for wedges. 593 83 83–02

5. WEDGE POCKET

Pocket for multiple wedges, with individual sections keeping wedges in place. 593 83 88–01

6. UNIVERSAL BAG

Universal bag for first aid kit, GPS tracker, power bar and other smaller items. $593\,83\,92{-}01$

7. MEASURE HOLDER

Holder to keep measuring tape in place. 593 83 91–01

Visit: www.husqvarna.com/uk/forestrytools



8. FILE AND COMBI-TOOL HOLDER

Holder for one round and one flat file, plus combi-tool. The holder effectively prevents broken or lost tools. 593 83 94–01

9. SPRAY CAN HOLDER

Holster for a spray can that makes sure it is securely kept in its place. 593 83 95–01 $\,$

10. CARRIER HOOK

A multi-purpose hook for carrying various tools, water cans or other equipment. $593\,83\,96{-}01$

11. UNIVERSAL TOOL HOLDER

Multi-purpose holder for carrying tools such as an axe, impact bar etc. 593 83 97–01

12. BREAKING BAR HOLSTER

The breaking bar holster from our classic tool belt can also be used with tool belt FLEXI. 505 69 32–92

13. CALIPER HOLSTER

The caliper holster from our classic tool belt can also be used with tool belt FLEXI. 505 69 32–04 $\,$

14. CRAYON HOLDER WITH REEL

Holder for crayon with spring-loaded metal reel. Crayon holder for 12mm crayons. Robust design with a metal reel that could be attached to the tool belt or harness. 593 83 98–01 593 97 55–01, graphite crayons 12 pcs

15. ACCESSORY BAG

Extra bag, suitable for your fire extinguisher, water bottle, extra clothing and more. 590 77 $71\mathchar`-01$

16. FIRST AID KIT

Includes first aid bandage, 9 plasters in various sizes, 2 wound swabs, 1 mirror, 1 cotton bud. 504 09 53–01

17. TAPE MEASURES

 With release hook.

 Metric 15m/50'
 586 99 76-01

 Metric 20m/66'
 586 99 76-02

FOOT BREAKING BAR



Telescopic foot breaking bar. Can be carried in a holster on a belt.



BREAKING BAR WITH CANT HOOK



Features forged bottom parts for extra strength. Front teeth give a better grip and a long handle makes it possible for a two-hand grip.

Durable and robust impact bar with optimised grip and the front teeth give a

RRP ex VAT

IMPACT BAR

better grip in wood.

Order PNC

577 40 28-01

LONG BREAKING BAR

ltem	Order PNC	RRP ex VAT	RRP inc VAT
130cm	574 38 72-01		
Cant Hook	574 38 73-01		

Item	Order PNC	RRP ex VAT	RRP inc VAT
80cm	586 89 69-01		
Cant Hook	505 69 43-02		





RRP inc VAT

FORESTRY AND ARBORIST TOOLS

LIFTING TONGS



Features sharp hooks with ground edges. Special hardened steel with a treated surface makes them robust and less sensitive for rust.

Item	Order PNC	RRP ex VAT	RRP inc VAT
20cm	574 38 75-01		
30cm	574 38 76-01		

MARKING TAPE



100% viscose, biodegradable. Approx. 75m long and 20mm wide.

Item	Order PNC	RRP ex VAT	RRP inc VAT
Orange	574 28 77-00		
Red	574 28 77-01		
Blue	574 28 77-02		
Yellow	574 28 77-03		

LIFTING HOOK



Features an extended hook for longer, wider opening to give a better grip when working. Special hardened steel with treated surface makes the hook robust and less sensitive to rust.


Order PNC	RRP ex VAT	RRP inc VAT
574 38 74-01		



Order PNC RRP ex VAT

575 57 23-01

RRP inc VAT

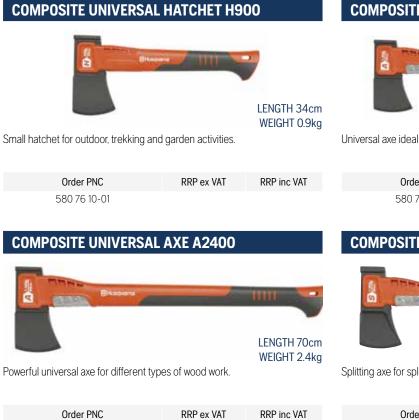

COMPOSITE UNIVERSAL AXE A1400



Universal axe ideal for splitting resinous wood.

Order PNC	RRP ex VAT	RRP inc VAT
580 76 11-01		

COMPOSITE SPLITTING AXE S1600



Order PNC	RRP ex VAT	RRP inc VAT	Order PNC	RRP ex VAT	RRP inc VAT
580 76 12-01			580 76 13-01		

FORESTRY AND ARBORIST TOOLS

COMPOSITE SPLITTING AXE S2800 WOODEN HATCHET th LENGTH 37.5cm LENGTH 70cm WEIGHT 0.6kg WEIGHT 2.8kg Powerful splitting axe for splitting large logs. A hatchet for fire wood and garden work. Order PNC RRP ex VAT RRP inc VAT Order PNC RRP ex VAT RRP inc VAT 580 76 14-01 576 92 64-01

LENGTH 24cm

WEIGHT 0.5kg

RRP inc VAT

WOODEN FOREST AXE



WEIGHT 0.85kg

Suitable for small-scale tree felling, limbing logs, branch trimming and clearing bushes. The long handle gives power to the cut.

Order PNC	RRP ex VAT	RRP inc VAT
576 92 62-01		

WOODEN CAMPING AXE

Smaller axe perfect for hiking and camping

Order PNC

599 67 35-01

WOODEN HIKING HATCHET



RRP ex VAT

BHusqvama

A smaller axe ideal for outdoor life in forests and open land, suitable for most tasks like chopping wood for the campfire. The size is perfect for packing in your backpack.

Order PNC	RRP ex VAT	RRP inc VAT
576 92 63-01		

WOODEN SMALL SPLITTING AXE



Best suited for basic splitting of lighter fire wood. The head is designed to go easy into the wood, and its small size makes it possible to use with one-hand grip.

Order PNC	RRP ex VAT	RRP inc VAT
576 92 68-01		

WOODEN CARPENTER'S AXE



Best suited for carpentry and other wood work. Recess in the head so that the hand gets as close as possible to the cutting edge for maximum control.

Order PNC	RRP ex VAT	RRP inc VAT
576 92 65-01		

WOODEN LARGE SPLITTING AXE



Best suited for splitting thicker wood and fire wood. The long handle creates extra power and has space for two-hand grip.

RRP inc VAT	Order PNC	RRP ex VAT	RRP inc VAT
	576 92 67-01		



WOODEN SLEDGE AXE



The most powerful and heaviest axe made for splitting logs and large chunks of wood. It has a hardened striking face in the neck and can therefore be used as a sledge or in combination with a splitting wedge.

Order PNC	RRP ex VAT	RRP inc VAT
576 92 66-01		

WOODEN HATCHET AXE



High quality forged hatchet with ash wood handle for small firewood and forest tasks.

Order PNC	RRP ex VAT	RRP inc VAT
597 62 77-01		

WOODEN CLEARING AXE



With hickory shaft and a double-edged blade that is reversible and replaceable.

Order PNC	RRP ex VAT	RRP inc VAT
579 00 06-01		

WOODEN UNIVERSAL AXE



High quality forged axe with ash wood handle and polished finish for low friction.

Order PNC	RRP ex VAT	RRP inc VAT
597 62 90-01		

WOODEN SMALL SPLITTING AXE



LENGTH 50cm WEIGHT 1.25kg

High quality forged small splitting axe with ash wood handle for splitting small to medium logs.

Order PNC	RRP ex VAT	RRP inc VAT
599 67 31-01		

WOODEN LARGE SPLITTING AXE



WEIGHT 2.5kg

High quality forged splitting axe with ash wood handle for splitting large logs, ergonomic handle shape gives optimum grip.

Order PNC	RRP ex VAT	RRP inc VAT
597 62 94-01		

WOODEN SAPPIE



tip. Part of the wooden handle is painted in orange for improved visibility.

Order PNC RRP ex VAT RRP inc VAT 38cm - 579 69 28-01 80cm - 579 69 28-02

GRINDSTONE



Silicon carbide grindstone for sharpening axes. Course and fine grains. In leather case.

Item	Order PNC	RRP ex VAT	RRP inc VAT
Grindstone	599 67 46-01		

FORESTRY AND ARBORIST TOOLS



Made of high impact ABS plastic. Helps the tree fall in the right direction.

ALUMINIUM FELLING WEDGE



RRP ex VAT

Helps the tree fall in the right direction. Possible to re-grind.

Order PNC

586 88 59-01

586 88 59-02

Item	Order PNC	RRP ex VAT	RRP inc VAT
10cm Arborist	598 03 57-01		
14cm	505 69 47-02		
20cm	505 69 47-03		
25cm	505 69 47-04		

SPLITTING WEDGES



Twisted wedge can be used for heavier duty log splitting.

Item	Order PNC	RRP ex VAT	RRP inc VAT
Twisted Splitting Wedge	577 25 92-01		

CHAINSAW BOX

Item

550g, 22cm 1000g, 26cm



Tough handy carrying case designed to carry a chainsaw, lubricants, and other accessories.

Order PNC	RRP ex VAT	RRP inc VAT
531 30 08-72		

Dealer Information: Must be ordered in quantities of 4

CHAINSAW BAG



48 Litre. Especially made for your chainsaw. Extra pockets for the chainsaw files and a Velcro fastening pocket placed on the outside.

Order PNC	RRP ex VAT	RRP inc VAT
597 41 83-01		

TROLLEY BAG 90L



Robust trolley bag with easy access u-shaped zipper and silent rubber wheels. Moulded bottom and side make the bag stand upright without support. Two organising bags included.

Order PNC	RRP ex VAT	RRP inc VAT
593 25 81-01		

DUFFEL BAG 70L



Moisture-repellent and easily cleaned material, smart inside pockets and soft top handles. Removable shoulder straps and organising bags included.

Order PNC	RRP ex VAT	RRP inc VAT
593 25 83-01		

BACKPACK



Durable backpack for all weathers. Easily cleaned material that keeps the inside dry. Roll-up seal and smart compartments for your laptop, thermos and water bottle.

Order PNC	RRP ex VAT	RRP inc VAT
593 25 82-01		

RRP inc VAT

FORESTRY AND ARBORIST TOOLS

FUEL STORAGE



The Combi Can enables you to refuel quickly without splash effects and any waste. The two containers are designed to achieve an optimised fuel and chain oil ratio. It also features an integrated tool box for frequently needed spare parts and filing equipment.

Approved in accordance with UN recommendations.

COMBI CAN



Item Combi Can 5 + 2.5 Litre Fuel Spout Oil Spout Winter Oil Spout



RRP ex VAT RRP inc VAT

🛨 THE SMART COMBI CAN



LEVEL WINDOW For quick visual check of remaining fuel level.



MECHANICAL LOCK opening and leakage.



INTEGRATED TOOL BOX The spout has a mechanical Making it easy to bring extra lock to prevent unexpected tools and frequent parts.



OVERFILL PROTECTION The flow stops automatically when the machines tank is full, which means you can lift the combi can without spilling fuel



Order PNC

580 75 42-01

586 11 04-01

586 11 05-01

586 11 07-01

ERGONOMIC GRIP The handles are placed for optimal lifting ergonomics when carrying and refuelling.



PARKING POSITION The spouts can be rotated into a parking position to prevent damage during transportation.

HAND SAWS

The new generation of Husqvarna saws have been ergonomically designed, to lie comfortably and safely in your hand during sawing and a stop at the end of the handle prevents you from slipping. This has proven particularly useful during pulling movements, and assists you in making smooth progress.

FOLDABLE PRUNING SAW 200F0



With a total length of 47cm, the 200FO saw is an easy-to-use all-rounder for cutting back thicker branches. It is lightweight making it ideal for all minor sawing work in the garden, and other outdoor activities.

Order PNC	RRP ex VAT	RRP inc VAT
967 23 64-01		

CURVED PRUNING SAW 300CU



Total length of 40cm. The rigid, curved saw blade with impulse-hardened precision toothing means you receive particularly high sawing performance. quiet running, effort-saving sawing and a very long lifetime. The particularly smooth pulling cut is ideal for fresh and dry wood. Comes with blade cover.

Order PNC	RRP ex VAT	RRP inc VAT
967 23 66-01		

STRAIGHT PRUNING SAW 300ST



Total length of 40cm. The rigid, straight saw blade with impulse-hardened precision toothing means you receive particularly high sawing performance. quiet running, effort-saving sawing and a very long lifetime. The particularly smooth pulling cut is ideal for fresh and dry wood. Comes with blade cover.

Order PNC	RRP ex VAT	RRP inc VAT
967 23 65-01		

PROFESSIONAL ARBORIST ACCESSORIES

THROW WEIGHT



Constructed from 100% 1,000 denier Cordura fabric. Abrasion resistant. Improved durability with high tensile strength.

Item	Order PNC	RRP ex VAT	RRP inc VAT
14 oz / 397 g	596 93 58-11		
12 oz / 340 g	596 93 58-12		
10 oz / 284 g	596 93 58-13		
8 oz / 227 g	596 93 58-14		

FOLDING THROWLINE CUBE



Large 40cm / 16" cube construction. Easily folds down to 20cm / 8" x 40cm / 16" triangle. 2 Interior pockets keeps throw weights separate.

Order PNC	RRP ex VAT	RRP inc VAT
596 93 60-11		

ROPE BAG



28L capacity bag holds up to 76m / 250' of 12.7mm / 1/2" diameter rope. Cinch top closure. External daisy chains. External gear storage. Covered top handles for added comfort.

Order PNC	RRP ex VAT	RRP inc VAT
596 93 63-11		

CHAINSAW HOOK



For easy connection of a chainsaw to a harness. Robust connection. Optimised for T525 / T540 XP® / T536Li XP® / T535i XP® / T540i XP®.

Order PNC		
580 80 03-01		

RRP ex VAT RRP ind

CARABINERS



Double locking twist lock gate. Key lock gate nose limits snagging of rope and clothing. Constructed from hot forged 707 aluminium.

Item	Order PNC	RRP ex VAT	RRP inc VAT
Oval	596 93 62-11		
D'	596 93 62-12		
HMS	596 93 62-13		

THROWLINE



55 m / 180' Throwline, 1.75mm diameter. 254kg / 560 lb. Tensile strength. Dyneema[©] construction. Low Stretch. Urethane coating for abrasion resistance. Hi-Vis orange.

Order PNC	RRP ex VAT	RRP inc VAT
596 93 59-11		

CHAINSAW STROP



To be used together with a chainsaw hook for connecting the chainsaw to a climbing harness. Elastic design. Measures 0.5m when relaxed and 1.25m fully stretched out.

Order PNC	RRP ex VAT	RRP inc VAT
577 43 80-01		



For arborists who use a rear handle chainsaw. Offers a safe way to connect the chainsaw to the chainsaw strop. Has an overload release.

ic VAT	Order PNC	RRP ex VAT	RRP inc VAT	
	578 07 71-01			

FORESTRY AND ARBORIST TOOLS



NEW

CLIMBING HARNESS



The Husqvarna climbing harness delivers the comfort and versatility you need when working long, demanding days in the trees. Soft back padding and adjustable leg loops increase your comfort and mobility while reducing physical strain. A double bridge and durable multi-layered webbing increase your safety. The multiple settings adapt to different working methods and climbing styles, while the many options for attaching accessories allows you to always bring the right tool for the job.

Order PNC	RRP ex VAT	RRP inc VAT
534 09 86-01		



NEW

NEW



Ideal for both experienced tree professionals and beginners, the Husqvarna climbing rope is designed to increase your work safety. This climbing rope maintains a consistent diameter while climbing for superior grip and less hand fatigue. Fully certified and with an approved splice at one end, it offers an excellent balance between softness and stiffness and is ideal for use with double rope techniques and hitch cords. Diameter 11.5mm.

Length	Order PNC	RRP ex VAT	RRP inc VAT
Orange, 45m	534 09 87-01		
Blue, 45m	534 09 87-11		
Orange, 60m	534 09 87-02		
Blue, 60m	534 09 87-12		

RIGGING ROPE, 14MM



Easy to handle and highly abrasion resistant, this Husqvarna rigging rope is ideal for both experienced tree professionals and beginners. The rigging rope is fully certified and features a high breaking strength. It is made from 32 strand 100% polyester, which makes it easy to handle, knot and splice. It features an approved splice at one end. Diameter 14mm.



Designed to increase your work safety, this Husqvarna climbing rope is ideal for both experienced tree professionals and beginners. Fully certified and ready to go, this versatile climbing rope can be used for single and double rope techniques with different mechanical hardware for a smooth ascent or descent. It features an approved splice at one end and offers an excellent balance between softness and stiffness. Diameter 11.8mm.

534 09 88-12

Length	Order PNC	RRP ex VAT	RRP inc VAT	Length	Order PNC	RRP ex VAT	RRP inc VAT
Orange, 45m	534 09 88-01			60m	534 09 89-01		
Blue, 45m	534 09 88-11						
Orange, 60m	534 09 88-02						

Blue, 60m

PROFESSIONAL ARBORIST ACCESSORIES

WORK POSITIONING LANYARD

NEW







When working high up in the trees, you need safety equipment you can really trust. The Husqvarna work positioning lanyard is strong and versatile. Fully certified and ready to use for different jobs and working methods. Designed to be lightweight and easily adjusted with one hand. The steel thimble loop allows it to be used as an additional climbing line or anchor point. It's also low friction and abrasion resistant.

Diameter 11.5mm.

Length	Order PNC	RRP ex VAT	RRP inc VAT
4m	534 09 98-01		
5m	534 09 98-02		



With the right equipment, even the most demanding days in the trees will pass more safely and smoothly. This Husqvarna friction saver comes ready to use and provides an effective barrier between the climbing rope and the tree – reducing damage to both. It is easy to use, easy to adjust and easy to remove, thanks to the smart, integrated design. Ideal for experienced tree professionals and beginners alike. Fully certified by CE and ANSI. Diameter 12mm.

Length	Order PNC	RRP ex VAT	RRP inc VAT
2m	534 09 92-01		

EYE TO EYE PRUSIK, 8MM NEW

A high-quality piece of safety equipment, the Husqvarna prusik is ideal for experienced tree professionals and beginners alike. The Husqvarna prusik is made from a polyester and aramid fibre mix, which makes it highly resistant to abrasions and heat while offering excellent grip. Diameter 8mm.

Length	Order PNC	RRP ex VAT	RRP inc VAT
76cm	534 09 99-01		
85cm	534 09 99-02		



Versatility is key to a successful working day high up in the trees. The multi-purpose Husqvarna sling is fully certified and ready to use in a number of ways. The Husqvarna sling can be used as an anchor sling or as a hitch cord, thanks to the eye to eye splice. It can even work as a friction saver due to the integrated lightweight ring.

Diameter 10mm.

Length	Order PNC	RRP ex VAT	RRP inc VAT
1.3m	534 09 97-01		



With this anti-shock chainsaw lanyard. Husqvarna has taken safety for tree professionals to the next level. If the chainsaw falls and gets stuck in falling branches, the chainsaw lanyard tears open to reduce the impact force of the falling chainsaw and prevent injury. Pre-treated elastic webbing provides high abrasion resistance, while an integrated ring provides an extra attachment point for the chainsaw. Ideal for both experienced tree professionals and beginners.

Order PNC	RRP ex VAT	RRP inc VAT
534 10 08 01		





This versatile Husqvarna gear bag can also be used as a travel bag or rigging bag. The smart, user-friendly design includes a side opening, carry handles at the top and sides, daisy chains inside and out plus lots of pockets for storing and organizing your essentials – including an easy to find first aid pocket. Well-padded, well-balanced shoulder straps and moulded back padding provide comfort, while durable, water resistant fabric and a reinforced bottom provide protection.


Order PNC	RRP ex VAT	RRP inc VAT
534 10 18-01		

NEW



FOR HARD WORK AND CLEAR GROUNDS

Brushcutting and grass trimming can be tough, lengthy jobs that demand endurance from both machine and operator. This is why our brushcutters, trimmers and clearing saws combine power and extreme durability with low weight. They are designed to be easy to handle and to deliver results you can be proud of. To ensure work is handled in the most comfortable way, Husqvarna offers harnesses designed to distribute the load optimally between shoulders, chest and back. For maximum comfort on long shifts.

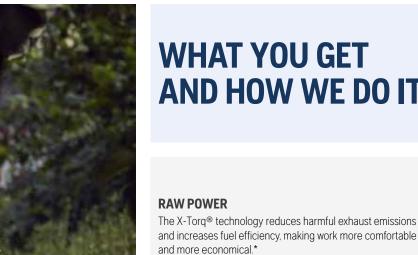





EASY TO START, EASY TO WORK WITH

For both petrol and battery-powered products a quick, easy start is imperative and we've made sure to develop technology to meet these demands. Just push a button or pull a cord: it's as easy as it should be.

ROBUST DESIGN

Our professional range of trimmers, brushcutters and forestry clearing saws are powerful, industrious machines, designed for many years of demanding operation.







BALANCED DESIGN

The handles are designed to be adjustable and vibrationdampened. High handle bars also make working on slopes more efficient.

LONG OPERATING

Low Vib® - engines are equipped with very effective antivibration dampeners that absorb vibrations, sparing your arms and hands to let you work more comfortably during long shifts.

*Compared with equivalent models without this feature.







HIGH-END RESULTS, WHATEVER YOUR NEEDS







OPTIMISED CUTTING EQUIPMENT FOR OPTIMAL RESULTS

Grass trimming or brushcutting becomes so much more rewarding when you fit the proper cutting equipment to your Husqvarna product. Husqvarna offers a wide range of proven trimmer lines, grass blades and grass knives with original equipment quality, optimised for your specific machine. For further guidance see pages 124–129 or consult your nearest Authorised Husqvarna dealer. **Find out more at www.husqvarna.com/uk**



100 - 300 SERIES

PART-TIME USE

TRIMMERS FOR DOMESTIC GARDEN MAINTENANCE AND **OVERGROWN AREAS**

Powerful and reliable trimmers, the perfect choice for giving lawn edges a great finishing touch, as well as trimming grass in those hard to reach places. All easy to handle and designed to help get the job done effortlessly.

BRUSHCUTTERS AND TRIMMERS FOR MORE DEMANDING JOBS

Designed for demanding domestic and landowner use. Perfect for farm and estate maintenance. 135R is perfect for large areas, supplied with a grass blade. 325iL battery trimmer is perfect for domestic maintenance in noise sensitive areas.



FOR FULL TIME **PROFESSIONAL USE**

High performance petrol and battery brushcutters designed for full-time professional use in demanding conditions. A choice of both loop and bullhorn handles to suit a range of different applications.



STARTING AS EASY **AS IT GETS**

The Husqvarna 500 series of trimmers and brushcutters are equipped with intuitive controls for purge and choke. Smart Start® minimises the effort to pull the starter cord, and the stop switch automatically returns to the "ON" position. This makes the starting procedure virtually fail-safe.



HIGH HANDLEBAR High handlebar gives increased legroom when working on slopes, which makes operation more efficient.

BRUSHCUTTERS

PRODUCT USE GUIDE

Use this guide to help you select the best product for your needs.

TYPE OF USE	MODEL	POWER SOURCE	DISPLACEMENT (CM ³) / VOLTAGE	WEIGHT	HANDLE TYPE	GRASS BLADE (SUPPLIED)	GRASS	
	110iL	Li-lon 36V	36V Li-ion	3.2kg	Loop		•	
	215iL	Li-ion Jack	36V Li-ion	3.1kg	Loop		•	
	122C	Petrol	21.7cm ³	4.4kg	Loop		•	
OCCASIONAL USE	129C	Petrol	27.6cm ³	4.5kg	Loop		•	
(DOMESTIC / HOMEOWNER)	129RJ	Petrol	27.6cm ³	4.8kg	J handle	•	•	
	129LK - Combi	Petrol	27.6cm ³	4.7kg	Loop		•	
	129R	Petrol	27.6cm ³	5.4kg	Bullhorn	•	•	
	135R	Petrol	34.6cm ³	6.8kg	Bullhorn	•	•	
	325iLK - Combi	Li-ion sev	36V Li-ion	3.8kg*	Loop		•	
PART-TIME USE	325iL	Li-ion Jack	36V Li-ion	3.0kg*	Loop		•	
(FARMER / LANDOWNER)	325iR	Li-ion Jack	36V Li-ion	3.1kg*	Bullhorn	•	•	
	325iRj	Li-ion Jev	36V Li-ion	3.8kg*	J handle	•	•	
	520iLX	Li-ion Jev	36V Li-ion	3.0kg*	Loop		•	
	520iRX	Li-ion sev	36V Li-ion	3.8kg*	Loop	•	•	
	525RJX	Petrol	25.4cm ³	4.3kg	J handle	•	•	
	525LK - Combi	Petrol	25.4cm ³	4.5kg	Loop		•	
	525RX II	Petrol	25.4cm ³	5.5kg	Bulhorn	•	•	
	525RXT II	Petrol	25.4cm ³	5.8kg	Bulhorn	•	•	
	525iLK - Combi	Li-ion Jaw	36V Li-ion	3.3kg*	Loop		•	
	525iLXT	Li-ion Jev	36V Li-ion	3.1kg*	Loop		•	
	525iRXT	Li-ion sev	36V Li-ion	4.2kg*	Bullhorn		•	
FULL-TIME USE (PROFESSIONAL)	535LK - Combi	Petrol	34.6cm ³	5.8kg	Loop		•	
	535RXT	Petrol	34.6cm ³	6.7kg	Bullhorn	•	0	
	535iRX	Li-ion sev	36V Li-ion	4.9kg*	Bullhorn	•	•	
	535iRXT	Li-lon asv	36V Li-ion	4.9kg*	Bullhorn	•	•	
	535iFR	Li-ion Jack	36V Li-ion	4.5kg*	Bullhorn	•***	•	
	543RS	Petrol	40.1cm ³	7.4kg	Bullhorn	•		
	545RX	Petrol	45.7cm ³	8.9kg	Bullhorn	•		
	545RXT	Petrol	45.7cm ³	8.7kg	Bullhorn	•		
	555RXT	Petrol	53.3cm ³	9.2kg	Bullhorn	•		
	553RBX	Petrol	50.7cm ³	12.1kg	Loop	•		

The product selector is only to be used as a guide. Please visit your local Authorised Husqvarna dealer for more information. *Excludes battery **Requires saw blade *** Supplied with saw blade • Optimised solution (guideline only) • Capable solution but not optimal (guideline only)

 	TRIMMING AND	BRUSHCUTTING		MULTI-TOOL ATTACHMENTS			MENTS	rs		
		X	11 (T			**		۲	PAGE	
LIGHT VEGETATION	MEDIUM VEGETATION	HEAVY VEGETATION	BRUSHWOOD / SMALL TREES	HEDGES	PRUNING	HARD SURFACES	LEAVES	SOIL		
									104	
									106	
									104	
0									105	
•									105	
•				•	•	•	•	•	120	
•									105	
•	•								106	
•	0			•	•	•	•	•	120	
•	•								107	
•	•								107	
•	•								107	
•	0								108	
•	0								108	
•	0								109	
•	0			•	•	•	•	•	121	
•	0								109	
•	0								109	
•	0			•	•	•	•	•	121	
•	0								108	
•	0								109	
•	•	0		•	•	•	•	•	121	
•	•	0							110	
•	•	0							110	
•	•	0							110	
•	•	0	•						111	
0	•	•	-						112	
0	•	•	•**						112	
0	•	•	• * *						112	
	•	•	• * *						113	
	•	•	-						113	
	•	•							113	

OCCASIONAL USE



Low weight grass trimmers designed for domestic use. The products are designed to be user friendly with features including Smart Start[®] and auto-return stop switch for maximum ease of use on the petrol products. For ultimate ease of use select the battery powered version which offers no direct emissions, low noise and low weight.

Ideal for applications including:

- Domestic garden maintenance
- Trimming lawn edges and around obstacles
- Mowing overgrown areas grass blade products



Light, convenient and easy to use high efficiency battery trimmer for homeowner use. Ideal for trimming lawn edges.

- Intuitive keypad
- Edging mode
- Automatic shut down
- Automatic line feed
- Adjustable front handle
- Kit includes B70 and C80

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	Brushed motor	1.36 / 1.05m/s²	3.3kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
110iL Unit Only	970 53 12-01		
110iL Kit	970 53 12-04		

122C



Lightweight curved shaft trimmer, ideal for homeowner use. Easy to start.

- Low noise engine
- Auto-return stop switch
- Smart Start®
- R25 Tap'n'Go head

Displacement	Power output	Vibration levels F/R	Weight
21.7cm ³	0.6kW / 0.8hp	5.0 / 3.6m/s ²	4.4kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
122C	966 77 97-01		



Powerful curved shaft trimmer, ideal for homeowner use. Easy to start and use.

- Smart Start®
- Auto-return stop switch
- Curved shaft
- R25 Tap'n'Go head

Displacement	Power output	Vibration levels F/R	Weight
27.6cm ³	0.85kW / 1.1hp	3.7 / 3.6m/s ²	4.5kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
129C	967 19 32-02		

129RJ



Loop handle brushcutter for homeowner use, ideal for tackling overgrown areas.

- Smart Start®
- Straight shaft
- R25 Tap'n'Go head
- Auto-return stop switch
- Single harness

•	Grass	В	lao	le

Displacement	Power output	Vibration levels F/R	Weight
27.6cm ³	0.85kW / 1.1hp	4.2 / 4.2m/s ²	4.8kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
129RJ	967 19 34-02		



Bullhorn brushcutter for homeowner use, ideal for tackling overgrown areas.

- Smart Start®
- Straight shaft
- R25 Tap'n'Go head

Auto-return stop switchDouble harness

Grass Blade

Displacement	Power output	Vibration levels F/R	Weight
27.6cm ³	0.85kW / 1.1hp	4.2 / 4.2m/s ²	5.4kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
129R	967 19 33-05		

REPLACEMENT CUTTING EQUIPMENT

Model	110iL	122C / 129C	129RJ / 129R
Head	A15B	R25 (3/8R)	R25 (M10L)
PNC	534 16 26-01	534 16 18-01	534 16 18-02
Recommended line size			
Line Diameter	1.5mm	2.0 - 2.4mm	2.0 - 2.4mm
Grass Blade	N/A	N/A	Grass 255-4
PNC	N/A	N/A	578 44 37-01
Guard type	N/A	Line guard	Combi guard
PNC	N/A	580 44 66-10	580 44 66-06
Support Cup	N/A	N/A	Support cup
PNC	N/A	N/A	503 80 01-01

H-TEAM RECOMMEND

Husqvarna protective glasses. Page 310



HUSQVARNA RECOMMEND

Husqvarna Whisper Twist trimmer line reduces noise levels by up to -8dBA



PART-TIME USE



Machines designed for demanding domestic and landowner use. Choose the 315iC for lighter applications and for use in noise sensitive areas, ideal for demanding domestic use. For more heavy duty medium density applications or when used for longer periods select the 135R which is supplied with ergonomic harness and grass blade. Products are supplied with a highly efficient line head.

Ideal for applications including:

- Property maintenance
- Overgrown areas
- Mowing larger areas (135R)
- Noise sensitive areas (battery)



Versatile, powerful bullhorn brushcutter, perfect for demanding domestic and landowner use.

- X-Torq[®]
- Double harness
- Grass Blade
- Auto-return stop switch
- T35 Tap'n'Go head

Displacement	Power output	Vibration levels F/R	Weight
34.6cm ³	1.4kW / 1.9hp	2.9 / 2.5m/s ²	6.8kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
135R	966 60 48-02		



Powerful battery trimmer, ideal for quick and easy trimming of lawn edges and tall grass in larger gardens.

- Intuitive keypad with savE[™]
- Adjustable handle
- Kit 1 includes B70 and C80
- Telescopic shaft
- Automatic shut downKit 2 includes B140 and C80

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	Brushless motor	4.5 / 2.7m/s ²	3.1kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
215iL Unit Only	970 53 60-01		
215iL Kit 1	970 53 60-07		
215iL Kit 2	970 53 60-03		



The pro-grade quality and performance of this battery trimmer effectively tackle thick grass in any weather. Its brushless E-torq motor has active cooling for maximum efficiency and is rear-mounted for optimal balance and motor protection.

- User Friendly Digital User Interface
 Brushless E-TORQ Motor
- 3-Speed Mode
- Weatherproof (IPX4)

Tap 'n' Go
Optimised Shaft & Gear

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-Ion	BLDC (brushless) Motor	TBC	3kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
325iL	970 56 68-01		



The pro-grade quality and performance of this battery brushcutter effectively tackle thick grass and light brush in any weather. Its brushless E-torq motor has active cooling for maximum efficiency and is rear-mounted for optimal balance and motor protection.

- User Friendly Digital User Interface
 Brushless E-TORQ Motor
- 3-Speed Mode Weatherproof (IPX4)
- Tap 'n' Go
 Ontimised Shaft & Gear

• Optimised	Shan	Q	Geal

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-Ion	BLDC (brushless) Motor	TBC	3.5kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
325iR	970 56 69-01		



The pro-grade quality and performance of this battery brushcutter effectively tackle thick grass and light brush in any weather. Its brushless E-torq motor has active cooling for maximum efficiency and is rear-mounted for optimal balance and motor protection.

•	User	Friendly	Digital	User	Interface	 Brus

- 3-Speed Mode
- face Brushless E-TORQ Motor • Tap 'n' Go

Weatherproof (IPX4)

Optimised Shaft & Gear

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-Ion	BLDC (brushless) Motor	TBC	3.1kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
325iRj	970 56 70-01		

REPLACEMENT CUTTING EQUIPMENT

Model	135R	215iL
Head	T35 M12	R25B
PNC	578 44 64-01	534 16 20-01
	Recommended lines	size
Line Diameter	2.4 - 2.7mm	2.0mm
Grass Blade	Multi 300-3	N/A
PNC	578 44 45-01	N/A
Guard type	Combi guard	N/A
PNC	537 33 16-01	N/A
Support Cup	Support cup M12	N/A
PNC	503 89 01-02	N/A

REPLACEMENT CUTTING EQUIPMENT				
Model	325iL	325iR	325iRJ	
Head	T35 (M10L)	T35 (M10L)	T35 (M10L)	
PNC	578 44 63-01	578 44 63-01	578 44 63-01	
Recommended line size				
Line Diameter	2.0 - 2.4mm	2.0 - 2.4mm	2.0 - 2.4mm	
Grass Blade	N/A	255-3	255-3	
PNC	N/A	578 44 49-01	578 44 49-01	
Guard type	Line guard	Combi guard	Combi guard	
PNC	597 01 62-01	536 17 43-01	536 17 43-01	
Support Cup	N/A	Support cup	Support cup	
PNC	N/A	503 89 01-01	503 89 01-01	

H-TEAM RECOMMEND

Protect what's important. Husqvarna gardener hearing protection. Page 310



HUSQVARNA RECOMMEND

Opti Quadra and Opti Penta trimmer lines for a heavier duty line. Page 126



FULL-TIME USE



High performance petrol and battery brushcutters designed for full-time professional use in light to medium density applications. A choice of both loop and bullhorn handles to suit a range of different applications. Bullhorn machines feature high offset post and ergonomic harness for optimum working position which maximises user comfort and productivity, ideal when working for long periods. Products are supplied with a highly efficient line head and grass blade.

Ideal for applications including:

- Landscape maintenance
- Verges and pathways
- Parks and public spaces
- **Overgrown** areas
- Noise sensitive areas (battery)



Professional use battery loop handle trimmer with 2-way rotation trimmer head.

- Brushless motor
- Two way head rotation · Blade capable
- Keypad with savE[™] • T25B Tap'n'Go head
- Weatherproof (IPX4)
- Voltage Vibration levels F/R Weight Motor type 36V Li-ion BLDC Brushless 1.2 / 0.7m/s² 3.0kg (excl. battery) Model Order PNC RRP ex VAT RRP inc VAT 520iLX Unit only 967 91 61-13 J-Handle Kit 587 37 50-01



Professional use battery bullhorn trimmer with 2-way rotation trimmer head. Supplied with grass blade.

- Brushless motor
- Two way head rotation
- T25B head & grass blade
- Keypad with savE[™]
- Balance 35B harness
- Weatherproof (IPX4)

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	BLDC Brushless	1.2 / 0.7m/s ²	3.8kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
520iRX Unit only	967 91 62-03		



Robust, high-performance professional battery grass trimmer. Well-balanced, lightweight and power equivalent to a 25cc petrol machine.

- Low Vib[®]
- 3-Speed Mode
- Weatherproof (IPX4)
- ErgoFeed[™] trimmer function Optimised Shaft & Gear Voltana Matantura Vikustian Javala E/D Wataht

ActiveCool

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-Ion	BLDC Brushless	TBC	3.1kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
525iLXT Unit only	970 55 15-01		



Robust, high-performance professional battery brushcutter. Lightweight, well-balanced and power equivalent to a 25cc petrol machine.

- Low Vib[®]
- 3-Speed Mode
- Weatherproof (IPX4)
- ActiveCool
- ErgoFeed[™] trimmer function • Optimised Shaft & Gear
- Voltage Vibration levels F/R Motor type Weight 36V Li-lon **BLDC Brushless** TBC 3.2kg (excl. battery) Model Order PNC RRP ex VAT RRP inc VAT 525iRXT Unit only 970 55 14-01

525RJX



J-Handle brushcutter designed for intensive professional use in lighter applications. Lowest vibrations in class.

- X-Torg®
- Single harness
- · Grass blade

• T35 Tap'n'Go head

Smart Start®

Displacement	Power output	Vibration levels F/R	Weight
25.4cm ³	1.0kW / 1.3hp	2.1 / 1.9m/s ²	4.3kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
525RJX	966 77 71-01		



Powerful, lightweight petrol brushcutter for professional use. Equipped with a large fuel tank for extended runtime. This robust, well-balanced brushcutter is designed for frequent trimming work.

- Auto-return stop switch • X-Torg®
- Tap 'n' Go
- Weatherproof (IPX4)

Displacement	Power output	Vibration levels F/R	Weight
25.4cm ³	1.0kW / 1.3hp	2.8 /2.7m/s ²	5.5kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
525RX II	970 44 66-01		

· Adjustable handle

REPLACEMENT CUTTING EQUIPMENT

Model	520iLX / iRX	525iLXT / iRXT	525RJX / RX II / RXT II		
Head	T25B M10	T35 M10	T35 M10		
PNC	579 29 40-03	578 44 63-01	578 44 63-01		
Recommended line size					
Line Diameter	2.0 - 2.4mm	2.4 - 2.7mm	2.4 - 2.7mm		
Grass Blade	Multi 255-3	Grass 255-4	Grass 255-4		
PNC	578 44 49-01	578 44 37-01	578 44 37-01		
Guard type	Combi guard	Combi guard	Combi guard		
PNC	577 01 83-03	588 11 79-01	588 11 79-01		
Support Cup	Support cup	Support cup	Support cup		
PNC	503 89 01-01	503 89 01-01	503 89 01-01		
J- Handle Kit*	520iLX	N/A	N/A		
PNC	587 37 50-01	N/A	N/A		

*Required when using grass blade



Powerful, lightweight petrol brushcutter for professional use. Equipped with a large fuel tank for extended runtime. This robust, well-balanced brushcutter is designed for frequent trimming work.

- Low Vib[®]
- X-Torg®
- · Adjustable handle
- Auto-return stop switch
- Tap 'n' Go
- Weatherproof (IPX4)

Displacement	Power output	Vibration levels F/R	Weight
25.4cm ³	1.0kW / 1.3hp	2.0 /2.5m/s ²	5.8kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
525RXT II	970 44 67-01		

HUSQVARNA RECOMMEND

Opti Quadra and Opti Penta trimmer lines for a heavier duty line. Page 126



FULL-TIME USE



High performance battery brushcutters designed for full-time professional use in light to medium density applications. Bullhorn machines with high offset post and ergonomic harness for optimum working position which maximises user comfort and productivity, ideal when working for long periods. Products are supplied with a highly efficient line head and grass blade.

Ideal for applications including:

- Landscape maintenance
- Verges and pathways
- Parks and public spaces
- **Overgrown** areas
- Noise sensitive areas

535iRXT



High-performance battery bull horn brushcutter designed for professional use in medium applications. 35cm³ petrol equivalent performance.

- Fleet Services[™] ready • ErgoFeed auto line feed
- Weatherproof (IPX4) • Balance XB[™] Harness
- 45cm cutting swath

Low Vib®



High performance mid-range bullhorn brushcutter for intensive professional use in medium applications.

- X-Torg®
- Smart Start®
- T35 Tap'n'Go head
- Low Vib[®]
- Balance X[™] harness
- Grass blade

Displacement	Power output	Vibration levels F/R	Weight
34.6cm ³	1.6kW / 2.2hp	2.4 / 3.1m/s ²	6.7kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
535RXT	966 62 89-02		



High-performance battery bull horn brushcutter designed for professional use in medium applications. 35cm³ petrol equivalent performance.

- Low Vib[®]
- Balance 55 harness
- 45cm cutting swath
- Weatherproof (IPX4)
- Intuitive keypad

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	BLDC Brushless	1.3 / 1.4m/s²	4.9kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
535iRX Unit only	967 85 06-05		

Li-ion SEV





Intuitive key pad is equipped with power button, LED battery status indicator as well as 3 speed mode for the E-TORQ[™] motor. ErgoFeed[™] button is positioned close to the thumb for convenience.

ErgoFeed[™] function feeds trimmer line with a simple push of a button. Reducing risk of unintentional feed, minimising trimmer line consumption. Trimmer head is designed with minimum moving parts for robustness and durability.

Voltage	Motor Type	Vibration Levels F/R	Weight
36V Li-ion	BLDC Brushless	1.2 / 1.4m/s ²	4.9kg (excl. battery)
Model	Order PNC	RRP Ex VAT	RRP Inc VAT
535iRXT Unit only	967 85 06-07		



High-performance battery clearing saw designed for lighter forestry clearing applications. 35cm³ petrol equivalent performance.

- Fleet Services[™] ready
- Saw & grass blades
- 45cm cutting swath
- Intuitive keypadBalance 55 harness
- Weatherproof (IPX4)

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	BLDC Brushless	1.4 / 1.7m/s²	4.5kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
535iFR Unit only	967 85 05-04		

REPLACEMENT CUTTING EQUIPMENT

Model	535iRX	535iRX / 535iRXT	
Head	T35 M12	E35B ErgoFeed™	
PNC	578 44 64-01	594 72 70-01	
	Recommended line size		
Line Diameter	2.4 - 2.7mm	2.4 - 2.7mm	
Grass Blade	Multi 300-3	Multi 300-3	
PNC	578 44 45-01	578 44 45-01	
Guard type	Combi guard	Combi guard	
PNC	590 88 01-01	590 88 01-01	
Support Cup	Support cup M12	Support cup M12	
PNC	503 89 01-02	503 89 01-02	
Model	535iFR		
Saw Blade			

Model	JJJIFK
Saw Blade	
PNC	597 46 82-01
Grass Blade	Multi 300-3
PNC	578 44 45-01
Trimmer Head	T 35 M12
PNC	578 44 64-01
Support Cup	Support cup M12
PNC	503 89 01-02

HUSQVARNA RECOMMEND

Technical Brushcutter and Trimmer clothing. Page 302



(f) www.facebook.com/HusqvarnaUK

FULL-TIME USE



High performance petrol brushcutters designed for full-time professional use in heavy density applications. Machines feature high offset post and ergonomic harness for optimum working position which maximises user comfort and productivity, ideal when working for long periods. Products are supplied with a highly efficient line head and grass blade. Selected machines with the addition of a saw blade can be used for brushwood and forestry applications.

Ideal for applications including:

- Landscape maintenance
- Highways and pathways
- Parks and public spaces
- Overgrown areas
- Forestry clearing



Heavy duty bullhorn brushcutter designed for intensive landscaper and landowner use.

- X-Torq®
- T35 Tap'n'Go head
- Double harness
- Grass blade

Displacement	Power output	Vibration levels F/R	Weight
40.1cm ³	1.5kW / 2.0hp	3.5 / 3.0m/s ²	7.4kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
543RS	966 77 99-01		

545RX



High performance professional brushcutter designed for heavy duty applications. Can be used as a forestry clearing saw.

- X-Torg®
- Smart Start®
- T45X Tap'n'Go head
- Low Vib[®]
- Balance X[™] harness
- Grass blade

Displacement	Power output	Vibration levels F/R	Weight
45.7cm ³	2.1kW / 2.8hp	3.2 / 2.9m/s ²	8.9kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
545RX	966 01 59-02		

545RXT AUTOTUNE™



High performance professional brushcutter with Autotune $^{\rm m}$ designed for heavy duty applications. Can be used as a forestry clearing saw.

- X-Torq®
- Autotune[™] & chokeless start
- T45X Tap'n'Go head
- Grass blade

Balance XT[™] harness

Low Vib[®]

Displacement	Power output	Vibration levels F/R	Weight
45.7cm ³	2.1kW / 2.8hp	3.2 / 2.9m/s ²	8.7kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
545RXT	967 17 67-04		



Our most powerful professional brushcutter designed for the most heavy duty applications. Can be used as a forestry clearing saw.

• X-Torq®	
-----------	--

- Smart Start®
- Low Vib® Balance XT[™] harness
- T55X Tap'n'Go head
- Grass blade

Displacement	Power output	Vibration levels F/R	Weight
53.3cm ³	2.8kW / 3.75hp	1.5 / 1.6m/s ²	9.2kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
555RXT	966 62 90-04		

553RBX



Powerful professional backpack brushcutter designed for heavy duty applications in demanding work environments.

- X-Torg®
- Backpack harness • T45X Tap'n'Go head
 - Grass blade

Displacement	Power output	Vibration levels F/R	Weight
50.6cm ³	2.3kW / 3.1hp	2.7 / 3.8m/s ²	12.1kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
553RBX	966 78 02-02		

REPLACEMENT CUTTING EQUIPMENT

543RS	545RX	545RXT					
T35 M12	T45X M12	T45X M12					
578 44 64-01	578 44 68-01	578 44 68-01					
Recommended line size							
2.4 - 2.7mm	2.7 - 3.3mm	2.7 - 3.3mm					
Multi 275-4	Multi 300-3	Multi 300-3					
578 44 47-01	578 44 45-01	578 44 45-01					
Combi guard	Combi guard	Combi guard					
537 33 16-01	544 46 43-01	544 46 43-01					
Support cup M12	Support cup M12	Support cup M12					
503 89 01-02	502 15 70-02	502 15 70-02					
	T35 M12 578 44 64-01 Recomme 2.4 - 2.7mm Multi 275-4 578 44 47-01 Combi guard 537 33 16-01 Support cup M12	T35 M12 T45X M12 578 44 64-01 578 44 68-01 578 44 64-01 578 44 68-01 Recommercial line size 24 - 27mm 27 - 3.3mm Multi 275-4 Multi 300-3 578 44 47-01 578 44 45-01 578 44 47-01 578 44 45-01 Combi guard Combi guard 537 33 16-01 544 46 43-01 Support cup M12 Support cup M12					

Model	555	553RBX			
Head	T55X	(M12	T45X M12		
PNC	578 44	4 70-01	578 44 68-01		
Recommended line size					
Line Diameter	3.0 - 4	2.7 - 3.3mm			
Grass Blade	Multi	Multi 350-3			
PNC	578 44	44-01	578 44 47-01		
Guard type	Line guard Blade guard		Combi guard		
PNC	544 10 74-02	537 33 16-01			
Support Cup	Support	Support cup M12			
PNC	502 15	70-02	503 89 01-02		

HUSQVARNA RECOMMEND

Technical Brushcutter and Trimmer clothing. Page 302



HARNESSES



Ergonomically designed harnesses for optimised load distribution. Our harnesses effectively distribute the weight of the machine, for the best possible balance. This makes the machine feel lighter, easier to manoeuvre and less strenuous to operate.

Ideal for applications including:

- Brushcutters
- Pole products
- Battery products

BALANCE 35



Ergonomically designed harness that distributes the load optimally between your shoulders, chest and back. Designed for use with smaller brush cutters.

Order PNC 537 27 57-02 RRP inc VAT

BALANCE 35B



Ergonomically designed harness specially developed for battery products. Distributes the weight of the machine optimally between your shoulders, chest and back.

Order PNC 537 27 57-05

RRP ex VAT

RRP ex VAT

RRP inc VAT

+ SMART ERGONOMIC SOLUTIONS (BALANCE XTTM)



Flexible shoulder section and individual height adjustment.



Unisex setting for over and under the chest.



Weight distribution from shoulders to hips.



Shock-absorbing, travelling hip pad.

BALANCE 55



Ergonomically designed harness that distributes the load optimally between your shoulders, chest and back. Designed for use with smaller brush cutters. BALANCE X[™] / XB[™]



Advanced harness with outstanding weight distribution between the shoulders, chest and back. Features floating hip pad with quick release. Designed for use with larger brush cutters.



Order PNC 537 27 57-01 RRP ex VAT

RRP inc VAT

578 44 97-01 (BALANCE X™) 597 46 93-01 (BALANCE XB™)

Order PNC

RRP ex VAT

RRP inc VAT

BALANCE XT2



NEW

Designed for full-time brushcutting and forestry clearing work, providing maximum ergonomic comfort. The functional features and versatile design make it easy to adapt the harness to your preferred personal settings and different applications. Wide, padded shoulder straps and hip belt make the harness comfortable to wear. The pivoting shoulder section enables excellent weight distribution.

BALANCE FLEX



Designed for use with petrol pole products. The harness provides even load distribution over the shoulders. The machine support strap is spring assisted allowing floating load support and can be locked to a set length.

Order PNC 536 25 34-01	RRP ex VAT	RRP inc VAT	Order PNC 578 44 99-01	RRP ex VAT	RRP inc VAT
	BALANCE 35	BALANCE 35B	BALANCE 55	BALANCE X™ / XB™	BALANCE XT2
Wide, ventilated back plate	•	•	•	•	•
Quick set adjustment points	•	•	•	•	•
Padded, ergonomics straps	•	•	•	•	•
Shock-absorbing hip pad	_	-	•	•	•
Flexible hip pad suspension	•	•	•	•	•
Wide, supporting hip belt	-	-	-	•	•
Quick release on hip pad	_	_	_	•	•
Grass and forest mode	_	_	_	•	•
Height adjustable back plate	_	_	-	-	•
Flexible shoulder section	_	_	_	-	•
Special setting for women	_	_	_	-	•

● = Available - = Not available

www.youtube.com/HusqvarnaUK

TECHNICAL SPECIFICATIONS

TRIMMERS & BRUSHCUTTERS	122C	129C	129RJ	129R	135R	525RJX	525RX II	525RXT II
TECHNICAL SPECIFICATIONS								
Cylinder displacement, cm ³	21.7	27.6	27.6	27.6	34.6	25.4	25.4	25.4
Power output, kW	0.6	0.85	0.85	0.85	1.4	1.0	1.34	1.34
Fuel tank, litres	0.36	0.34	0.34	0.34	0.6	0.51	0.65	0.65
Sound pressure level at operators ear, dB(A)*	88	93	94	94	98	94	94	96
Sound power level guaranteed (LWA) dB(A)**	104	114	114	114	113	106	106	106
Equivalent vibration level (ahv, eq) left/right handle, m/s ^{2***}	5.0/3.6	3.7/3.6	4.2/4.2	4.2/4.2	2.9/2.5	_	2.8/2.7	2.0/2.5
Equivalent vibration level (ahv, eq) front/rear handle, m/s²***	5.0/3.6	3.64/3.59	4.21/4.23	4.61/4.23 5.89/4.6	-	2.1/1.9	-	-
Weight (excl. cutting equipment), kg	4.4	4.5	4.8	5.4	6.8	4.3	5.5	5.8
FEATURES								
Autotune [™]	_	_	_	_	_	_	_	_
Auto-return stop switch	•	•	•	•	•	•	•	•
Combi-guard	-	-	•	•	•	•	•	•
Ergonomic handle	•	•	•	•	•	-	•	•
Fuel pump	•	•	•	•	•	•	•	•
	-	-						•
Grass bevel gear	_	_	•	•	•	•	•	
High handlebar Low Vib®	_	_	_	_	_	_	•	•
		_						
Smart Start®	•	•	•	•	_	•	•	•
Soft grip handles	•	•	•	_	_			•
Standalone starter		_				•	•	•
Tap-n-Go trimmer head	•	•	•	•	•	•	•	•
Tool-less adjustment harness hook eyelet	-	-	-	-	-	-	-	•
Tool-less adjustment of handlebar	-	-	-	-	•	-	•	•
X-Torq® engine	-	-	-	-	•	•	•	•
7° offset handle bar	-	-	-	-	•	-	•	•
HARNESSES								
Balance XT™	_	-	-	_	-	-	_	-
Balance X™	-	-	-	-	-	-	-	-
Balance 55	_	-	-	-	-	-	-	•
Balance 35	_	-	-	-	_	-	•	-
Standard double	_	-	_	•	•	_	_	_
Standard single	-	-	•	-	_	•	-	-
CUTTING EQUIPMENT								
	•/-/-	•/-/-	●/●/-	●/●/-	●/●/-	●/●/-	●/●/-	•/•/-
	•/ -/ -	•/ -/	•/•/	•/•/	•/•/	•/•/	•/•/	•/•/

• = Available (•) = Accessory - = Not available *Equivalent sound pressure level, according to ISO 22868, is calculated as the time-weighted energy total for different sound pressure levels under various working conditions. Typical statistical dispersion for equivalent sound pressure level is a standard deviation of 1 dB (A). **Noise emissions in the environment measured as sound power (LWA) in conformity with EC directive 2000/14/EC. The guaranteed sound power level includes variation in production as well as variation from the test code with 1-3 dB(A). ***Equivalent vibration level, according to ISO 22867, is calculated as the time-weighted energy total for vibration levels under various working conditions. Reported data for equivalent vibration level has a typical statistical dispersion (standard deviation) of 1 m/s².

ALWAYS USE GENUINE HUSQVARNA LUBRICANTS AND SPARE PARTS FOR YOUR BRUSHCUTTER OR TRIMMER

These high quality spare parts and lubricants are developed to facilitate the care and maintenance of your Husqvarna equipment and enable trouble-free operation and storage. Husqvarna recommend regular service done by qualified technicians using only Husqvarna original or recommended spare parts. This will support the product's performance and lifetime. See your owner's manual or consult your Authorised Husqvarna dealer if any uncertainty occurs.

 \checkmark

		 /.4 . 		8.7 • • • • • • • • • • • • •	9.2 	12.1
	• • • • • • • • • • • • • • • • • • •					
	• • • • • • • • • • • • • • • • • • •					
	• • • • • • • • • • • • • • • • • • •					
	• • • • • • • • • • • • • • • • • • •					
	• • • • • • • • • • • • • • • • • • •			0 0		
	• • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • •				 • • • • • • • • • • • • •
	• • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • •				 • • • • • • • • • • • • •
	• • • • • • • • • • • • • • • • • • •				 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
	• • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • •	- • • • • • • • • • • • • •			 • • • • • • • • • • • • • • • • •
	• • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • •	- • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • •		
	• • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • •				
	• • • • • • • • • • • • • • • • • • •	• • • • • • • • • • •			 0 0 0 0 0 0 0 0 0 0 0 0 0	 • • • • • • • • • • • • •
	• • • • • • • • • • • • • • • • • • •	• • - • - -		• • • • • • • • •		
	• • • • • • • • • • • • • • • • • • •	• • - • - -	- • • • • • • • •	• • • • • •		 • • • • • • • • • • • • • • • • •
	• • • • • • • • • • • • • • • • • • •	• • •		• • • • •		 • •
	• • • • • • • • • • • • • • • • • • •	• • •		• • • •	 0 0	 • •
	• • • • • • • • • • • • • • • • • • •	•	 • •	• • • • • • • • • • • • • • • • • • • •	 •	 •
	• • • • •	•	- • •	• • • • • • • • • • • • • • • • • • • •	- • -	- - •
· · · · · · · · · · · · · · · · · · ·	•	•	-	•	- •	- - •
	•	•	-	•	- •	-
	_		_	•	_	-
	_	7.4				
		7.4	0.9	8.7	9.2	12.1
		/.4	0.9	8.7	9.2	12.1
		/.4	0.5	8./	9.2	12.1
	6.7	7.4	8.9	0.7		10.1
	-	-	-	-	-	2.7/3.8
	2.7/ J.1	0.07 0.0	J.Z / Z.J	5.272.3	1.J / 1.U	
	2.4/3.1	3.5/3.0	3.2/2.9	3.2/2.9	1.5/1.6	_
	113	118	101	100	101	118
	96	95	101	100	101	97
	0.6	0.75	0.9	0.9	1.1	0.8
	1.6	1.5	2.1	2.1	2.8	2.3
	34.6	40.1	45.7	45.7	53.3	50.6
	535RXT	543RS	545RX	545RXT	555RXT	553RBX
	FOFDYE	F 40 D 0	F 4 5 5 4			FFORM

COMBI MACHINES	129LK	525LK	535LK
Cylinder displacement, cm ³	27.6	25.4	34.6
Power output, kW	0.85	10	16
Fuel tank, litres	0.34	0.51	0.6
Sound pressure level at operators ear, dB(A)*	95	94	99
Sound pressure level at operators ear, dB(r) Sound power level guaranteed (LWA) dB(A)**	114	106	114
Equivalent vibration level (ahv, eq) front/rear handle, m/s ^{2***}	9.9/8.9	3.0/3.3	4.5 / 3.9
Weight (excl. cutting equipment), kg	4.7	4.5	5.8
EATURES Auto-return stop switch	•	•	•
Auto-return stop switch	•	•	•
"Click on" attachments	•	•	•
Combi-guard	_	-	_
Comfort handle	-	•	•
Detachable shaft	•	•	•
Ergonomic handle	—	•	•
Fuel pump	•	•	•
Grass bevel gear	-	•	•
Low Vib®	-	_	_
Smart Start®	•	•	_
Soft grip handle	_	•	•
Standalone starter	_	•	•
Tap-n-Go trimmer head	•	•	•
Tool-less adjustment of handlebar / handle	_	•	•
X-Torg [®] engine	_	•	•

NOMINAL POWER A new machinery directive (2006/42/EC) came into force on January 1. 2010, requiring manufacturers to declare the nominal power of engines, in kilowatts (kW). The power rating of the engines indicated is the average net power output during a normal working situations and meets applicable noise regulations (at specified rpm, see owner manual) of a typical production engine for the engine model measured to SAE standard J 1349/ISO 1585. Mass production engines may differ from this value. Actual power output for the engine installed in the final machine will depend on the operating speed, environmental conditions and other variables.

-

GET ONE MACHINE FOR THE WHOLE GARDEN







ENJOY HIGHLY EFFICIENT WORK - AT WHATEVER HEIGHT

We never compromise when it comes to power, durability and productivity. Therefore, we have designed our combi machines to work equally well as our conventional machines. This means that you can enjoy convenient and powerful pole sawing, as well as really efficient and reliable cultivating.

ATTACHMENTS THAT HELP YOU GET RID OF EVERYTHING

Start by choosing the machine that best suits your needs – then explore our wide range of attachments. Each attachment offers a quick connection, durable design and – most importantly – sufficient power to trim dense grass, cut vigorous bushes, blow or sweep huge piles of leaves and debris. Just to give some examples of what we can help you get rid of.



MAXIMUM VERSATILITY WHATEVER THE TASK

Our combi trimmers are the perfect choice if you want to have a truly smart, versatile work tool. You will only have to start and warm up one machine – then you are able to quickly and easily switch between many attachments to deal with all kinds of tasks – all year round. For maximum ease of use and low noise select the battery powered 325iLK which is designed for part-time use. The petrol and battery power units, together with all attachments, are as powerful and efficient as the conventional trimmers, pole saws, hedge trimmers, and so on. Also, a combi machine means less space for storage as well as less time and money for maintenance and service.



RELIABLE PERFORMANCE

The petrol and battery power units, together with all attachments, are as powerful and efficient as the conventional trimmers, pole saws, hedge trimmers, and so on. All to give you reliable workmates that help you get the job done at all times.

START UP ONE MACHINE

If you choose petrol power you will only have to start and warm up one machine – then you are able to quickly and easily switch between many attachments to deal with all kinds of tasks – all year round.

►·· ← COMBI MACHINES

▶-+€

OCCASIONAL / FULL-TIME USE



A range of applications can be managed using one power unit making them extremely flexible tools. The 100 series Combi machine is ideal for domestic use. The battery powered 325iLK is designed for part-time use and ideal in noise sensitive areas and the 500 series is designed for full-time professional use. All attachments are designed for both domestic and full time professional use and can be used on both petrol and battery powered machines.

Ideal for applications including:

- All round garden maintenance
- Landscaping
- Bushes and trees
- Hard surfaces and soil
- Grass
- Lawn maintenance

129LK



Lightweight combi machine designed for homeowner use. Easy to start and supplied with trimmer attachment.

- Smart Start®
- T25 Tap'n'Go™ head
- Attachments available
- Multi-use
- Comes with trimmer attachment

Power output	Vibration levels F/R	Weight
0.85kW / 1.1hp	9.9 / 8.9m/s²	4.7kg
Order PNC	RRP ex VAT	RRP inc VAT
967 19 36-03		
	0.85kW / 1.1hp Order PNC	0.85kW / 1.1hp 9.9 / 8.9m/s ² Order PNC RRP ex VAT

325iLK



High performance battery combi machine designed for part-time use. Includes TA850 trimmer attachment.

- Brushless motor
- Multi-use
- Power unit only
- 3 performance modes 13 attachments available

UPDATED

Li-ion /36V

25cm² petrol performance

Displacement	Power output	Vibration levels F/R	Weight
36V Li-ion	0.8kW / 1.0hp	2.6 / 1.0m/s ²	3.8kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
325iLK Unit only	967 85 01-03		
J-Handle Kit	587 37 50-03		





Professional combi machine designed for full time use. Takes a variety of attachments for a wide range of applications.

Smart Start®

• X-Torq®

525LK

- Multi-use
- Power unit only
- Attachments available

Displacement	Power output	Vibration levels F/R	Weight
25.4cm ³	1.0kW / 1.3hp	3.0 / 3.3m/s ²	4.5kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
525LK Unit only	967 14 83-01		



Robust, high-performance professional battery combi machine. Well-balanced, lightweight and power-equivalent to a 25cc petrol machine.

- Brushless E-TORQ motor
- Multi-useWeatherproof (IPX4)
- 3-Speed mode
- Attachments available
 - Integrated Connectivity

Displacement	Power output	Vibration levels F/R	Weight
36V Li-Ion	BLDC Brushless	TBC	3.3kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
525iLK Unit only	970 55 16-02		





High performance professional combi machine designed for full time use. Takes a variety of attachments for a wide range of applications.

- X-Torq®
- Comes with trimmer attachment At
- T35 Tap'n'Go™ head
- Multi-useAttachments available
- Displacement
 Power output
 Vibration levels F/R
 Weight

 34.6cm³
 1.6kW / 2.2hp
 4.5 / 3.9m/s²
 5.8kg

 Model
 Order PNC
 RRP ex VAT
 RRP inc VAT

 535LK
 967 68 81-03
 5.8kg

REPLACEMENT CUTTING EQUIPMENT

Model	129LK	325iLK	
Head	T25 M10	T35 M10	
PNC	578 44 61-01	578 44 63-01	
Recommended line size			
Line Diameter	2.0 - 2.4mm	2.4 - 2.7mm	
Guard type	Combi guard	Combi guard	
PNC	580 44 66-06	588 11 79-01	

REPLACEMENT CUTTING EQUIPMENT

Model	525LK / 525iLK	535LK		
Head	T35 M10	T35 M10		
PNC	578 44 63-01	578 44 63-01		
	Recommended line size			
Line Diameter	2.4 - 2.7mm	2.4 - 2.7mm		
Guard type	Combi guard	Combi guard		
PNC	588 11 79-01	588 11 79-01		

HUSQVARNA RECOMMEND

Opti Quadra and Opti Penta trimmer lines for a heavier duty line. Page 126



CLICK-IN-CLICK-OUT

The combi attachments are easy to change over with minimal effort using the click-in-click-out mechanism.



PRODUCT SPECIFICATIONS Please see page 117 for full specifications.

►·· ← COMBI MACHINES

OCCASIONAL / FULL-TIME USE



A wide range of attachments designed to cover all aspects of outdoor maintenance from grass trimming through to hard surface cleaning, maximising machine flexibility. All attachments are designed for both occasional and full time professional use and can be used on both petrol and battery power units.

Ideal for applications including:

- All round garden maintenance
- Landscaping
- Bushes and trees
- · Hard surfaces and soil
- Grass
- · Lawn maintenance

TRIMMER TA 850



Trimmer attachment equipped with combination guard and T35 Tap-n-Go $^{\rm M}$ trimmer head. Blade capable (J-handle kit required) Weight 1.2kg

Fits to	Order PNC	RRP ex VAT	RRP inc VAT
LK / iLK	537 35 35-03		

WEED SCISSORS RA850



Cutting attachment for weed control and grass edging along footpaths and gravel paths. Reduces the risk of scattered stones and debris. Weight 2.5kg

Fits to	Order PNC	RRP ex VAT	RRP inc VAT
LK / iLK	967 90 85-01		

EDGER ECA850



Edging attachment, ideal for keeping lawn, pathway and flowerbed edges neat. Features adjustable support wheel and curved shaft. Weight 3.2kg

Fits to	Order PNC	RRP ex VAT	RRP inc VAT
LK / iLK	967 92 55-04		

EDGER ESA850



Edging attachment, ideal for keeping lawn, pathway and flowerbed edges neat. Features adjustable support wheel. Weight 3.2kg

Fits to	Order PNC	RRP ex VAT	RRP inc VAT
LK / iLK	967 92 56-04		

HEDGE TRIMMER HA 200



Short reach adjustable hedge trimmer attachment. 60cm / 23.6" blade length. Head adjustment 135°. Tube length 11cm. Weight 2.3kg

Fits to	Order PNC	RRP ex VAT	RRP inc VAT
LK	596 31 65-03		

HEDGE TRIMMER HA 860



Long reach adjustable hedge trimmer attachment ideal for hedge tops. 60cm / 23.6" blade length. Head adjustment 135°. Tube length 85cm. Weight 2.6kg

Fits to	Order PNC	RRP ex VAT	RRP inc VAT
LK / iLK	596 31 66-03		

TILLER CA 230



Tiller attachment, ideal for use on flowerbeds and smaller areas of soil. Features heavy duty gearbox and 2 tines. Weight 3kg

Fits to	Order PNC	RRP ex VAT	RRP inc VAT
LK / iLK	967 29 42-01		

SWEEPER SR 600-2



Rubber broom attachment, ideal for sweeping sand and gravel from paths, driveways and lawns. Guard is included. Working width 60 cm. Weight 6.5kg

Fits to	Order PNC	RRP ex VAT	RRP inc VAT
LK / iLK	967 29 44-01		

BLOWER BA 101



Blower attachment, ideal for clearing paths and driveways from leaves, litter and grass clippings. Airflow 15 m³/min, Air speed 66m/s. Weight 1.9kg

Fits to	Order PNC	RRP ex VAT	RRP inc VAT
LK / iLK	967 28 64-01		



Shaft extension that gives an extra reach of 78cm. Weight 0.6kg

Fits to	Order PNC	RRP ex VAT	RRP inc VAT
LK / iLK	967 29 71-01		

POLE SAW PA 1100



Pole saw attachment, ideal for pruning when additional reach is required. Cuts branches up to approx. 15 cm in thickness. Length 110 cm. Weight 1.4kg

Fits to	Order PNC	RRP ex VAT	RRP inc VAT
LK / iLK	537 18 33-27		

SCARIFIER DT600



Dethatcher attachment for removal of moss and thatch to provide a healthier lawn.Working width 60cm. Weight 6.4kg

Fits to	Order PNC	RRP ex VAT	RRP inc VAT
LK / iLK	967 29 69-01		

BRUSH BR600



Bristle brush attachment, ideal for sweeping dirt from paths, driveways and in deep grooves. Guard is included. Working width 60 cm. Weight 5.5kg

Fits to	Order PNC	RRP ex VAT	RRP inc VAT
LK / iLK	967 29 67-01		

BRUSH CUTTER BCA 850



Brush cutter attachment with combination guard and Multi 255-4 grass blade. Inc. J-handle & harness. Weight 2.6kg

Fits to	Order PNC	RRP ex VAT	RRP inc VAT
LK / iLK	967 18 59-02		



CUTTING EQUIPMENT



All Husqvarna trimmer heads, trimmer lines and blades are designed to do more than simply cut. Their outstanding design, high quality materials and facilitating technology offer top level performance, efficiency and safety no matter what your application.

TRIMMER HEAD - TAP-N-GO™ 25-55C



Tap-n-Go[™] function automatically feeds line when the head is pushed into the ground. X variants have a longer working life due to a Tap-n-Go[™] button with ball bearing. T35 Universal includes adapters that allow it to be attached to most other trimmers.

RRP ex VAT RRP inc VAT

Item	Order PNC
T25 3/8" Semi Auto - Curved Shaft	578 44 60-01
T25 M10 Semi Auto - Straight Shaft	578 44 61-01
T25B M8 Semi Auto - Battery	589 87 32-01
T25B M10 Semi Auto - Battery	579 29 40-03
T35 M10 Semi Auto	578 44 63-01
T35 M10 Semi Auto - Universal	578 44 94-01
T35 M12 Semi Auto	578 44 64-01
T35X M10 Semi Auto (W. Ball Bearing)	578 44 65-01
T35X M12 Semi Auto (W. Ball Bearing)	578 44 66-01
T45X M12 Semi Auto (W. Ball Bearing)	578 44 68-01
T55X M12 Semi Auto (W. Ball Bearing)	578 44 70-01
ErgoFeed E35B (Fits 535iRXT)	594 72 70-01
E35B M10	594 72 70-03

TRIMMER HEAD - MANUAL 25-55C



The line is fed manually by the user by pushing the line feed button and pulling the cord. This enables the user to select the length of line to achieve the effect desired.

Item S35 M10 S35 M12 Manual SII M12 (W. Ball Bearing)

Order PNC	RRP ex VAT	RRP inc VAT
578 44 74-01		
578 44 76-01		
578 44 78-01		

TRIMMER HEAD - TRI-CUT



Distinct design with plastic blades instead of trimmer line, ideal for coarser grass and terrain with stones. Highly visible, replaceable plastic flails which are safe to use around trees and bushes.

Item Tri Cut M10 Tri Cut M12
 Order PNC
 RRP ex VAT
 RRP inc VAT

 578 44 91-01
 578 44 93-01
 578 44 93-01

TRIMMER HEAD - ALLOY



Robust and reliable with quick and easy line loading. Maintenance is minimised and the low cutting height gives a tidy result.

Alloy Manual - Fixed

Order PNCRRP ex VATRRP inc VAT578 44 82-01





PRODUCT USE GUIDE


Use the guide below to help you select the best trimmer head for your needs.

		RECOMMENDED ENGINE DISPLACEMENT	CORD FEED	DURABILITY	USE	LINE SIZE	LINE CAPACITY	THREAD
	T55X	55cm ³	Semi automatic	••••	Heavy grass Grass	3 - 4mm	10 - 6m	M12
\sim	T45X	45cm ³	Semi automatic	••••	Heavy grass Grass	2.7 - 3.3mm	9 - 7.5m	M12L
	T35X	25 - 35cm ³	Semi automatic	••••	Grass	2.4 - 2.7mm	8.5 - 7m	M10L M12L
×0	T35	25 - 35cm ³	Semi automatic	••••	Grass	2.4 - 2.7mm	8.5 - 7m	M10L 12L Univ.
	T25	25cm ³	Semi automatic	●●●●○	Grass	2 - 2.4mm	6 - 5m	3/8"R M10L
	T25B	Battery	Semi automatic	••••	Grass	2 - 2.4mm	6 - 5m	M10
	R25	26 - 30cm ³	Semi automatic	•••o	Grass	2.4mm	2m	3/8"R M10L
	R25B	26 - 30cm ³	Semi automatic	•••o	Grass	2.0mm	5m	M10L
Ø	E35B Ergofeed™	Battery 535iRXT	Semi automatic	••••	Grass	2.4 - 2.7mm	-	-
	300 S35	30cm ³	- Manual		Grass	2.4 - 2.7mm	8 - 7m	M10L
\sim	330	30 - 42cm ³		••••0				M12L
Ø	Superauto II	<42cm ³	Automatic	••••	Grass	2.4mm	4m	M10
0	Trimmy SII	50cm ³	Manual	••• •	Heavy grass Grass	2 - 3.3mm	9 - 5m	M12
Ø	Alloy	All displacements	Manual	••••	Heavy grass Grass	2 - 3.3mm	-	N/A
	TriCut	All displacements	-	••••	Heavy grass Grass	-	-	M10L M12L
	A15B	Battery	Automatic	••••	Grass	1.6mm	5m	M5L




TRIMMER LINE - OPTI ROUND






Diameter (mm)	Length (m)	Order PNC	RRP ex VAT	RRP inc VAT
• Ø1.5	15	597 66 88-01		
• Ø2.0	15	597 66 88-10		
• Ø2.0	130	597 66 88-11		
• Ø2.4	15	597 66 88-20		
• Ø2.4	90	597 66 88-21		
• Ø2.4	240	597 66 88-22		
• Ø2.7	12	597 66 88-30		
• Ø2.7	70	597 66 88-31		
• Ø2.7	240	597 66 88-32		
• Ø3.0	10	597 66 88-40		
• Ø3.0	56	597 66 88-41		
• Ø3.0	240	597 66 88-42		
• Ø3.0	637	597 66 88-43		
o Ø3.3	75	597 66 88-50		
o Ø3.3	240	597 66 88-51		
o Ø3.3	530	597 66 88-52		

TRIMMER LINE - OPTI QUADRA




Diame	ter (mm)	Length (m)	Order PNC	RRP ex VAT	RRP inc VAT
•	Ø2.4	70	597 66 89-01		
•	Ø2.4	210	597 66 89-02		
•	Ø2.7	55	597 66 89-10		
•	Ø2.7	170	597 66 89-11		
•	Ø3.0	48	597 66 89-20		
•	Ø3.0	240	597 66 89-21		
•	Ø3.0	528	597 66 89-22		
0	Ø3.3	65	597 66 89-30		
0	Ø3.3	183	597 66 89-31		
0	Ø3.3	437	597 66 89-32		

TRIMMER LINE - WHISPER TWIST




Diameter (mm)	Length (m)	Order PNC	RRP ex VAT	RRP inc VAT
• Ø1.5	15	597 66 91-01		
• Ø2.0	15	597 66 91-10		
• Ø2.0	112	597 66 91-11		
• Ø2.4	12	597 66 91-20		
• Ø2.4	77	597 66 91-21		
• Ø2.4	210	597 66 91-22		
• Ø2.7	10	597 66 91-30		
• Ø2.7	60	597 66 91-31		
• Ø2.7	210	597 66 91-32		
• Ø3.0	9	597 66 91-40		
• Ø3.0	48	597 66 91-41		
• Ø3.0	210	597 66 91-42		

TRIMMER LINE - OPTI PENTA



Diamete	er (mm)	Length (m)	Order PNC	RRP ex VAT	RRP inc VAT
•	Ø2.4 Ø2.4 Ø2.7 Ø2.7	90 240 70 240	597 66 90-01 597 66 90-02 597 66 90-10 597 66 90-11		
• • ○	Ø3.0 Ø3.0 Ø3.3	56 240 75	597 66 90-20 597 66 90-21 597 66 90-30		


TRIMMER LINE - CORECUT



Diame	ter (mm)	Length (m)	Order PNC	RRP ex VAT	RRP inc VAT
0	Ø2.0	15	597 66 92-01		
0	Ø2.0	112	597 66 92-02		
0	Ø2.4	12	597 66 92-10		
0	Ø2.4	77	597 66 92-11		
0	Ø2.4	210	597 66 92-12		
0	Ø2.7	10	597 66 92-20		
0	Ø2.7	60	597 66 92-21		
0	Ø2.7	210	597 66 92-22		
0	Ø3.0	9	597 66 92-30		
0	Ø3.0	48	597 66 92-31		
0	Ø3.0	210	597 66 92-32		
0	Ø3.3	65	597 66 92-40		
0	Ø3.3	210	597 66 92-41		
0	Ø4.0	65	597 66 92-50		
0	Ø4.0	138	597 66 92-51		



Oxo-biodegradable



GRASS BLADES



For dense, coarse grass, but not for woody growth.

Item	Order PNC	RRP ex VAT	RRP inc VAT
Grass 255 - 3T	578 44 49-01		
Grass 255 - 4T	578 44 37-01		
Grass 255 - 8T	578 44 40-01		
Grass 275 - 4T	578 44 47-01		
Multi 300 - 3T	578 44 45-01		
Multi 330 - 2T	578 44 51-01		
Multi 350 - 3T	578 44 44-01		

EDGER BLADE



Durable 19cm edger blade allows for a cutting depth up to 6cm for edging your lawn.

Item	Order PNC	RRP ex VAT	RRP inc VAT
Edger Blade	503 84 82-02		

SAW BLADES



Efficient and durable with a tooth design that gives a smooth cut and reduces the risk of the blade getting pinched in the wood.

Item	Order PNC	RRP ex VAT	RRP inc VAT
Scarlett 200 - 22T	597 46 82-01		
Scarlett 225 - 24T	597 46 89-01		



PLASTIC BLADES



Replaceable plastic blades for Tri Cut head.

Item	Order PNC	RRP ex VAT	RRP inc VAT
6 pieces - 255mm	531 01 77-14		
6 pieces - 300mm	531 01 77-15		

SHREDDER BLADE



Shredder blade for mulching applications such as coarse grass, bushes and bramble with stems up to 2cm. Must be used with appropriate shredder guard.

Item	Order PNC	RRP ex VAT	RRP inc VAT
Shredder Blade 1"	589775301		
Shredder Blade 20mm	589775501		
Shredder Blade 1", Bulk 10pcs	589775310		
Shredder Blade Kit 1" Inc guard	544842901		

HUSQVARNA RECOMMEND

Technical Brushcutter and Trimmer clothing. Page 302





\$

CUTTING EQUIPMENT

CUTTING EQUIPMENT GUIDE

CUTTING LQU		00		
NODEL	GRASS		COARSE GRASS	
55RXT	A11 + 18 (19 (2			4 9
53RBX	B5 + 8 15 1			
43RS	B5 + 8 15 1	7 18 21 22	B5 + E4 + 1 2 4	
45RXT/545RX	A10 B8 + 18 /	B8 C6 + 21	B8 C6 + E2 E3 + 2	4
35iRXT	A9 + 15 17			I
35iRX/ 53i5FR	A9 + 15 17			
5RXT	A8 B7 + 8 (1	5 17 18 21 22	B7 + E4 + 2 4	
5LK	B4 + 9 11 (1	4 16 20		
5RXT/525RX	B4 + 2 9	11 14 16 20	B4 + E1 + 6	
5RJX	A15 B4 + 2	9 11 14 16 20	B4 + E1 + 6	
5iLK	A10 + 15		1	
5LK	A15 B4 + 2 9	11 14 16	1	
5iLXT	A15 B4 + 3 11			
5iRXT		1 14 16 20	B4 + 6	
DirX	B1 + [3]		B1 + 6	
DiLX	B1 + 13		F4 + 6	
5iL	A14 + 11 14 1	6		
5iRj	A10 + 14		B9 + 5 6	
5iR	A10 + (14)			
5iLK	A10 + 2 11 1	3 15		
iL	A16 + 6			
5R		5 17 18 21 22	B7 + E4 + 1 2 3	4 6
R	B3 + (1)		B3 + E1 + 6	
)RJ	B3 + 11 5		B3 + E1 + 6	
LK	B3 + 1			
OC	A12 + (4) 10			
20	A1 + (4) 10			
	A17 + 1			
			SUPPORT CUPS	KITS
	INATION GUARDS GRASS BLADE GUAI 577 01 83-05		503 80 01 01	527 04 95 01
545.03.11-01				
BZ			(20mm/1")	952 71 56-16
B3 580 44 66-10 B3 5	580 44 66-06 C3 544 16 03-01	D3 574 50 67-02		F2 952 71 56-16 incl. 1 2
4 577 96 51-02 B4 5	544 02 65-02	2 D4 544 04 42-10	E4 503 89 01-02 O	◆◎
5 585 33 92-01 B5 5	537 33 16-03 C5 502 46 49-01	D5 501 32 04-02		F3 544 24 96-01 incl. 82 64 2
578 40 34-02 B6	537 29 74-01	D6 501 32 04-03	<u>+</u>	0.
592 94 18-01	537 33 16-01	537 31 09-02	 	587 37 50-01
537 34 94-03 S		502 30 36-01)	F4 For blade attachment
B8			>	
590 88 01-01 B9	536 17 43-01	D9 502 43 55-01	>	
503 95 43-01				
544 10 74-01				
537 29 73-01				
502 46 50-01				
8			<u> </u>	
4 597 01 62-01				
5 588 54 37-01 5				
529 96 69-01				
	1	1	1	

				CUTTIN	IG EQUIPMENT
BUSHES AND TREES	HARD SURFACES	ATTACHMENTS		MIN-MAX TRIMMER LINE DIAMETER (SUPPLIED HE	AD) SUPPLIED HARNESS
D2 + 9 / D9 + 10 12				3.0 - 4.0mm	BALANCE XT
				2.7 - 3.3mm	INTEGTRATED
D5 + 9 / D3 + 10				2.7 - 3.3mm	STANDARD DOUBLE
D7 + 9 11				2.7 - 3.3mm	BALANCE XT / X
D6 + 9				2.4 - 2.7mm	BALANCE XB
D6 + 9				2.4 - 2.7mm	BALANCE XB
D5 + 9				2.4 - 2.7mm	BALANCE X / STANDARD DOUBLE
10 13 14 15	56	1 TO 7 9 12 13 1	4 15	2.4 - 2.7mm	-
D4 + 9				2.4 - 2.7mm	BALANCE 55 / 35
				2.4 - 2.7mm	-
11 14 15	56	1 TO 11 12 14 15		2.4mm	
10 13 14 15	56	1 TO 11 12 13 14 1	5	2.0 - 3.3mm	-
				2.0 - 2.7mm	
D4 + 9				2.0 - 2.7mm	
				2.0 - 2.4mm	BALANCE 35B
				2.0 - 2.4mm	-
				2.0 - 2.4mm	
				2.0 - 2.4mm	SINGLE
				2.0 - 2.4mm	BALANCE 35B
10 13 14 15	56	1 TO 12 14 15		2.0 - 2.4mm	-
				2.0mm	-
				2.0 - 2.4mm	STANDARD DOUBLE / -
				2.0 - 2.4mm	STANDARD DOUBLE / -
				2.0 - 2.4mm	STANDARD DOUBLE / -
10 13 14 15	56		4 15	2.0 - 2.4mm	-
				2.0 - 2.4mm	-
				2.0 - 2.4mm	-
				1.5mm	-
CUTTING EQUIPMENTS	(<u> </u>		ATTACHMEN	-	
534 16 26-01 (Automatic) 14 (Automatic)	578 44 63-01 (SemiAut T35 M10		967 92 5 ECA85	55-04	967 28 64-01 BA 101
2 578 44 82-01 (Fixed) Alloy	578 44 64-01 (SemiAut T35 M12	J/0 44 4J=01 / /	967 92 5 ESA850	56 04	15 967 29 67-01 BR 600
5947270-01 (ErgoFeed ^{NI}) 16	578 44 65-01 (SemiAut T35X M10	··· 578 44 44-01	967 29 4 CA230	12-01	A8 2
4 534 16 18-01 (SemiAuto) R25 3/8 R	578 44 66-01 (SemiAut T35X M12	578 44 48-01	967 29 4 SR 600-2		Cutting equipment highlighted in bold supplied with machine as standard equipment.
5 534 16 18-02 (SemiAuto) 18 R25 MIO L	578 44 68-01 (SemiAut T45X M12	5 Grass Blade 255 - 3T	967 29 6 BR 600	57-01	quipmont.
6 534 16 20-01 (SemiAuto) 19 R25B M10	578 44 70-01 T55X M12	Grass Blade 255 - 4T	967 28 6 BA101	The second se	
7 578 44 74-01 (Manual) 20 535 M10 (Manual) 20	578 44 91-01 TriCut M10	578 44 47-01 Grass Blade 275 - 4T		69-01 b	
8 578 44 76-01 (Manual) S35 M12 21	578 44 93-01 TriCut M12	- 8 578 44 40-01 Grass Blade 250 - 8T	967 90 8 RA 850	Ø	

P

www.youtube.com/HusqvarnaUK

۰

۰

967 90 86-01 RA-V

967 29 71-01 EX780

537 35 35-03 TA850

596 31 65-03 HA200

11 BCA850

967 18 59-02

 \sim

(SemiAuto)

Q

(SemiAuto)

Q

(SemiAuto)

Q

(SemiAuto)

Q

22

578 44 71-01 Superauto II 1"

10 578 44 60-01 T25 3/8"R

11 578 44 61-01 T25 M10

12 589 87 32-01 T25B M8

13 579 29 40-03 T25B M10

9

578 44 78-01 Trimmy SII M12

(Manual)

-9-

544 84 29-01 Shredder blade 320-2T

597 46 82-01

Scarlett 22T 200mm

597 46 89-01 Scarlett 24T 225mm

597 46 91-01

Maxi 22T 200mm

578 44 30-01

Maxi 24T 225mm

SHARP TOOLS FOR GREAT LOOKS

A hedge needs time and care to stay healthy and beautiful. A well-kept hedge will provide you with privacy while giving the garden solid lines and visual appeal. Different hedges need different types of tools, which is important to keep in mind when buying a hedge trimmer. All Husqvarna hedge trimmers are powerful, precise and efficient to give great results every time. They're machines designed to make your work easier.



WHAT YOU GET **AND HOW WE DO IT**



No matter if you choose to use a battery or petrol-powered hedge trimmer, the overall robust design will provide a long service life and make sure your trimmer makes easy work of even the toughest of tasks.

LOWER YOUR IMPACT

Our battery-powered hedge trimmers are virtually free from emissions, whereas for petrol-powered machines, the engine technology helps reduce harmful exhaust emissions and increases fuel efficiency.

OUIET OPERATION

The battery operation or our low noise engine technology together with the special design make our hedge trimmers quiet and easy to use. A very important aspect for everyone who operates in residential areas.

SMOOTHER STARTING

The engine and starter have been designed so the machine starts quickly with minimum effort, getting you started quickly.

LOW VIBRATIONS

Our petrol-powered engines are equipped with effective anti-vibration dampeners that absorb vibrations, whereas battery-powered machines all produce much less vibration, sparing your arms and hands.







MAKE SURE YOU ALWAYS TRIM WITH FIRST CLASS RESULTS

EXTENDED HEDGE TRIMMERS REACH WHERE OTHERS STRUGGLE

Articulating extended battery and petrol trimmers are perfect when you need to reach difficult places without losing performance. They have superb handling, are easy to start, suit both high and low hedges and with back folding cutting head making them extra easy to store and transport.



Telescopic extension

Telescopic reach

Adjustable cutter

bar angle

Push button start battery power



Double-sided hedge trimmers are designed for shaped sections of hedges. They offer efficient and comfortable operation with features such as Smart Start[®], Low Vib[®] and adjustable handle on most models.

- Shaping hedgesCoarse cutting
 - Coarse cutting Great performance
- Great performanceAdjustable handles

_ Adjustable rear handle

Leaf catcher

Long cutting blade

Wide hedgesPrecision cuttingComfortable

operationCoarse Cutting

SINGLE-SIDED HEDGE TRIMMERS STRAIGHT CUTS IN ONE MOVEMENT

Single-sided trimmers are supplied with long blades and still feature an optimised weight distribution to make it easier to make straight cuts with precision. The leaf catcher helps collecting leaves and debris, saving time and effort.

AMARAN



WHY CHOOSE A BATTERY HEDGE TRIMMER?

Low noise. No direct emissions. Low vibrations. Perfect balance. High performance. Extremely low operational cost. These are some of the criteria of an excellent hedge trimmer and that's exactly what you get from the Husqvarna Battery Series hedge trimmers.

Lightweight and perfectly balanced to facilitate comfortable work, even when trimming for extended hours. Plus, you'll enjoy the low maintenance of a battery-powered tool.



PRODUCT USE GUIDE


Use this guide to help you select the best product for your needs.

TYPE OF USE	MODEL	POWER SOURCE	DISPLACEMENT (CM ³) / VOLTAGE	WEIGHT	BLADE LENGTH	FINE	COARSE	FINE TALL	COARSE TALL	PAGE
	122HD45	Petrol	21.7cm ³	4.7kg	45cm / 18"	•	ο			134
OCCASIONAL USE (DOMESTIC /	122HD60	Petrol	21.7cm ³	4.9kg	60cm / 24"	•	ο			135
HOMEOWNER)	215iHD45	Li-lan 36V	36V Li-ion	3.2kg*	45cm / 18"	•	ο			135
	322HD60	Petrol	21.7cm ³	5.2kg	60cm / 24"	•	•	0	o	135
PART-TIME USE (FARMER / LANDOWNER)	322iHD60	Li-ion Jack	36V Li-ion	3.2kg*	60cm / 24"	•	•	ο	o	135
	522iHD60	Li-ion aev	36V Li-ion	3.6kg*	60cm / 24"	•	o	o	ο	136
	522iHDR60	Li-lon Jev	36V Li-ion	3.9kg*	60cm / 24"	•	•	o	ο	136
	522iHD75	Li-ion asv	36V Li-ion	3.9kg*	75cm / 30"	•	ο	o	o	136
	522HD60X	Petrol	21.7cm ³	4.9kg	60cm / 24"	•	o	o	o	137
	522HDR60X	Petrol	21.7cm ³	5.0kg	60cm / 24"	0	•	o	ο	137
	522HDR75X	Petrol	21.7cm ³	5.2kg	75cm / 30"	0	•	o	o	137
FULL-TIME USE (PROFESSIONAL)	522HS75X	Petrol	21.7cm ³	5.0kg	75cm / 30"	•	ο	o	o	137
	522HSR75X	Petrol	21.7cm ³	5.0kg	75cm / 30"	0	•	ο	ο	137
	520iHE3	Li-ion aev	36V Li-ion	4.1kg*	55cm / 22"	•	•	•	•	139
	520IHT4	Li-ion acv	36V Li-ion	5.3kg*	55cm / 22"	•	•	•	•	139
	525HE3	Petrol	25.4cm ³	6.35kg	55cm / 22"	•	•	•	•	138
The product selector is on	525HE4	Petrol	25.4cm ³	6.4kg	55cm / 22"	•	•	•	•	138

The product selector is only to be used as a guide. Please visit your local Authorised Husqvarna dealer for more information.

* Excludes battery • Optimised solution (guideline only) • Capable solution but not optimal (guideline only)

OCCASIONAL / PART-TIME USE

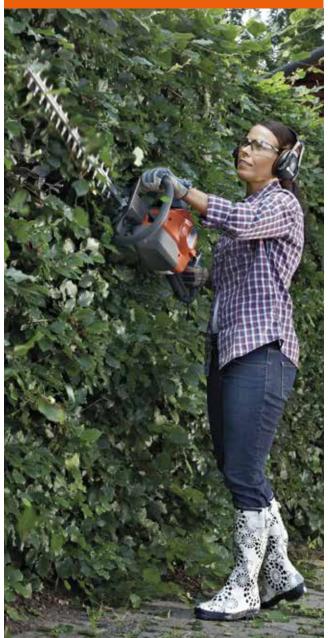

Low weight hedge trimmers designed for domestic occasional to part-time use. Our products are designed to be user friendly with features including Smart Start® and auto-return stop switch for ease of use on the petrol products. For ultimate ease of use select the battery powered version. 100 series are perfect for domestic garden use whilst 300 series are made for cutting denser materials and to withstand tougher work.

Ideal for applications including:

- Garden maintenance
- Trimming & pruning
- Shaping
- Farm & Estate maintenance (300 series)

120iTK4-H

UPDATED Lition sev



Telescopic pole hedge trimmer, equipped with a telescopic tube with up to 4m reach and split shaft for easy transportation. Adjustable 7 angled cutting head for convenient cutting positions. Part of the 120iTK4 Combi Series.

- 2,800 cuts/min
- Split shaft transport mode
- 7 angled cutting head
- Keypad with savE[™]
- 50cm blade length
- Kit includes B70 & C80

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	2 Brush motor	1.223 / 0.816m/s ²	4.5kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
120iTK4-H Unit only	970 51 59-02		
120iTK4-H Kit	970 51 59-07		

122HD45



Low-noise, lightweight hedge trimmer for domestic use, with useful features including Auto return stop switch and Smart Start.®

- Low noise engine
- Smart Start®
- Low Vib®
- 4050 cuts/min blade speed

Displacement	Power output	Vibration levels F/R	Weight
21.7cm ³	0.6kW / 0.8hp	2.9 / 4.9m/s ²	4.7kg
Blade length	Order PNC	RRP ex VAT	RRP inc VAT
45cm / 18"	966 53 23-01		

HEDGE TRIMMERS





Low-noise, lightweight hedge trimmer for domestic use with convenient features including an adjustable rear handle and Smart Start.®

- · Low noise engine
- Low Vib[®]
- Smart Start®
- · Adjustable rear handle
- 4050 cuts/min blade speed

Displacement	Power output	Vibration levels F/R	Weight
21.7cm ³	0.6kW / 0.8hp	4.1 / 3.6m/s ²	4.9kg
Blade length	Order PNC	RRP ex VAT	RRP inc VAT
60cm / 24"	966 53 24-01		

215iHD45





Low weight high efficiency domestic battery hedge trimmer designed for maximum ease of use.

· High efficiency motor

Voltage

- 3000 cuts/min blade speed
- Kit 1 includes B70 and C80
 - Motor type Vi

36V Li-ion	Brushless motor
Model	Order PNC
215iHD45 Unit only	970 53 65-01
215iHD45 Kit 1	970 53 65-03
215iHD45 Kit 2	970 53 61-01

- 45cm / 18" blade length
- Kit 2 includes 215iL. B140 &

Digital interface with savE[™]

bration levels F/R	Weight
2.1 / 1.7m/s²	3.2kg (excl. battery)
RRP ex VAT	RRP inc VAT

322HD60



Robust, double-sided hedge trimmer. The multi-position handle, low weight and easy starts provide good handling, while the high capacity, professional knife blades allow for excellent cutting performance.

 Low noise engine Low Vib[®] Smart Start® · Adjustable rear handle • 4400 cuts/min blade speed Durable Gearbox

Displacement	Power output	Vibration levels F/R	Weight
21.7cm ³	0.6kW / 0.8hp	4.4 / 4.3m/s ²	5.2kg
Blade length	Order PNC	RRP ex VAT	RRP inc VAT
60cm / 24"	967 65 89-02		

Locate your nearest dealer \bigcirc Visit: www.husqvarna.com/uk/dealer-locator

H-TEAM RECOMMEND

Husqvarna protective glasses. Page 310



HUSQVARNA RECOMMEND

XP[®] Power 2 Fuel





There is no better fuel for your Husqvarna product than our alkylate fuel manufactured to unique Husqvarna specifications. XP[®] Power 2 is mixed with exactly 2% of our XP® 2-stroke oil giving you a cleaner, cooler and healthier engine. Read more on pages 312 - 313.



This durable battery hedge trimmer delivers high-quality cuts at high capacity. Its lightweight, ergonomic design has a balanced rear handle and a mode selector to adapt power and runtime to the job at hand.

User Friendly Digital User Interface
 Lightweight Design

 Flexible Battery System Automatic Shutdown

Veatherproof	(IPX4)	
--------------	--------	--

3-Speed Mode

Weatherproof (IPX4)		 3-Speed Mode 		
	Voltage	Motor type	Vibration levels F/R	Weight
	36V Li-Ion	BLDC Brushless	TBC	3.2kg (excl. battery)
	Model	Order PNC	RRP ex VAT	RRP inc VAT
	322iHD60 Unit only	970 46 64-01		

FULL-TIME USE



High performance petrol and battery hedge trimmers designed for professional use. The products feature heavy duty commercial gearboxes and high knife speed for efficient cutting. Consider a battery model for equivalent petrol performance with lower noise, running costs and no direct emissions.

Ideal for applications including:

- Landscape maintenance
- Parks and public spaces
- Noise sensitive areas (battery)
- Shaping



A lightweight and well-balanced 36 Volt battery-powered hedge trimmer for full-time professional use.

- High Cutting Performance
- Trim-cut Blades
- Weatherproof (IPX4)
- Lightweight Design
- Integrated Connectivity
 LowVib[™]

	Voltage	Motor type	Vibration levels F/R	Weight
	36V Li-Ion	BLDC (brushless) Motor	2.1 / 1.7m/s²	3.6kg (excl. battery)
	Model	Order PNC	RRP ex VAT	RRP inc VAT
52	22iHD60 Unit only	970 46 60-02		



A well-balanced, lightweight 36 Volt battery-powered coarse-cut hedge trimmer for full-time professional use.

- High Cutting Performance
- Coarse-Cut Blades
- Integrated Connectivity
- Weatherproof (IPX4)
- Lightweight Design
- Multi Position rear handle

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-lon	BLDC (brushless) Motor	2.2 / 2.6m/s ²	4kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
522iHDR60 Unit only	970 46 62-02		

522iHD75 NEW

A well-balanced, lightweight 36 Volt battery hedge trimmer for full-time professional use.

- High Cutting Performance
- ce Lightweight Design • Integrated Connectivity
- Trim-cut Blades
 Weatherproof (IPX4)
 I owVib[™]

• weatherproof (IPA4)		• LUWVID	
Voltage	Motor type	Vibration levels F/R	Weight
36V Li-lon	BLDC (brushless) Motor	1.4 / 1.8m/s²	3.8kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
522iHD75 Unit only	970 46 61-02		

Visit: www.husqvarna.com/uk/hedge-trimmers

HEDGE TRIMMERS

522HD60X



Fine cut professional hedge trimmer with high blade speed for fine trimming work. Low weight and low vibration with multi-position handle and open blade guard.

- Low Vib[®]
- Commercial gearbox
- · Adjustable rear handle
- 4400 cuts/min blade speed
- Fine cut dual sided blade

	luue speeu		
Displacement	Power output	Vibration levels F/R	Weight
21.7cm ³	0.6kW / 0.8hp	2.8 / 2.1m/s²	4.9kg
Blade length	Order PNC	RRP ex VAT	RRP inc VAT

967 65 87-01

522HDR60X

60cm / 24"



Coarse cut professional hedge trimmer with lower blade speed for higher cutting power. Low weight and low vibration with multi-position handle and open blade guard.

- Low Vib®
- Commercial gearbox
- Adjustable rear handle
- 3200 cuts/min blade speed
- Rough cut dual sided blade

Displacement	Power output	Vibration levels F/R	Weight
21.7cm ³	0.6kW / 0.8hp	3.8 / 1.3m/s ²	5.0kg
Blade length	Order PNC	RRP ex VAT	RRP inc VAT
60cm / 24"	967 65 83-01		

522HDR75X



Coarse cut professional hedge trimmer with lower blade speed for higher cutting power. Low weight and low vibration with multi-position handle and open blade guard.

- Low Vib[®]
- Commercial gearbox
- · Adjustable rear handle • 3200 cuts/min blade speed
- · Rough cut dual sided blade

Displacement	Power output	Vibration levels F/R	Weight
21.7cm ³	0.6kW / 0.8hp	3.1 / 2.2m/s ²	5.2kg
Blade length	Order PNC	RRP ex VAT	RRP inc VAT
75cm / 30"	967 65 84-01		

522HS75X



Fine cut professional single sided hedge trimmer with high blade speed for fine trimming work. Low weight and low vibration design with leaf catcher

- Low Vib[®]
- · Leaf catcher
- 4400 cuts/min blade speed
- Commercial gearbox
- Fine cut single sided blade

	1		
Displacement	Power output	Vibration levels F/R	Weight
21.7cm ³	0.6kW / 0.8hp	2.9 / 1.8m/s ²	5.0kg
Blade length	Order PNC	RRP ex VAT	RRP inc VAT
75cm / 30"	967 65 92-01		

522HSR75X



Coarse cut professional single sided hedge trimmer with lower blade speed for higher cutting power. Low weight and low vibration design with leaf catcher

- Low Vib[®]
- Leaf catcher · 3200 cuts/min blade speed
- Commercial gearbox
- Rough cut single sided blade

Displacement	Power output	Vibration levels F/R	Weight
21.7cm ³	0.6kW / 0.8hp	2.9 / 1.8m/s ²	5.0kg
Blade length	Order PNC	RRP ex VAT	RRP inc VAT
75cm / 30"	967 65 90-01		

HUSQVARNA RECOMMEND NEW Hedge Trimmer Spray



Keep your hedge trimmer blades clean and lubricated for better performance and reduced wear. Read more on page 317.

POLE HEDGE TRIMMERS



Long reach petrol pole hedge trimmers designed for frequent use, products feature adjustable cutter bar for ergonomic trimming of ground cover and taller hedges. For professional applications select the long reach battery pole hedge trimmer, offering higher levels of torque versus petrol equivalents with much lower noise levels and no direct emissions.

Ideal for applications including:

- Landscape maintenance
- Parks and public spaces
- Noise sensitive areas (battery)
- Ground cover
- Tall hedges

525HE3



25cc pole hedge trimmer with high blade speed, designed for professional users. With a reach up to 3 meters reach and durable 135° angle adjustment, this versatile machine is suitable for both tall and low hedges.

- X-Torg®
- Rear bumper
- 4300 cuts/min blade speed
- Smart Start®Adjustable head
- Head adjustment 135°

		,	
Displacement	Power output	Vibration levels F/R	Weight
25.4cm ³	1.0kW / 1.3hp	5.6 / 4.4m/s ²	5.9kg
Blade length	Order PNC	RRP ex VAT	RRP inc VAT
60cm / 24"	967 94 49-01		

525HE4



25cc high reach pole hedge trimmer with 60cm cutter bar and high knife speed, designed for professional use. Up to 4 meters reach and durable 135° angle adjustment. Wuitable for high, wide and low hedges.

- X-Torq®
- Rear bumper
- 4300 cuts/min blade speed
 H
- Smart Start®Transport position
 - Head adjustment 135°

Displacement	Power output	Vibration levels F/R	Weight
25.4cm ³	1.0kW / 1.3hp	4.6 / 3.9m/s ²	6.3kg
Blade length	Order PNC	RRP ex VAT	RRP inc VAT
60cm / 24"	967 94 51-01		

HEDGE TRIMMERS





Highly efficient professional battery pole hedge trimmer with 3.5m reach, features adjustable cutter bar. Weatherproof (IPX4) with low noise and vibrations.

• Brushless motor • Remote cutter adjustment

• 4000 cuts/min blade speed

- Keypad with savE[™]
- Transport position
- Head adjustment 120°

Voltage	Motor type	Vibration levels F/R	Weight	
36V Li-ion	BLDC Brushless	3.5 / 2.5m/s ²	4.1kg (excl. battery)	
Model	Order PNC	RRP ex VAT	RRP inc VAT	
Unit only - 55cm / 22"	967 91 58-13			



Telescopic professional battery pole hedge trimmer with 4.5m reach, features adjustable cutter bar. Weatherproof (IPX4) with low noise and vibrations.

- Brushless motor
- Extended legnth 3.5 m
- 4000 cuts/min blade speed
- Head adjustment 120°

Keypad with savE[™]

Transport position

Voltage	Motor type	Vibration levels F/R	Weight
36V Li-ion	BLDC Brushless	2.0 / 1.7m/s ²	5.3kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
Unit only - 55cm / 22"	967 97 12-03		

O Locate your nearest dealer

Visit: www.husqvarna.com/uk/dealer-locator

HUSQVARNA RECOMMEND

Working in wet conditions. Husqvarna rain clothing. Page 303



H-TEAM RECOMMEND

Hearing protection. See page 310



SHARE your stories and photos on your Facebook, Instagram and Twitter by tagging us.

HusqvarnaUK UK_Husqvarna 6 **HusqvarnaUK**



⊿₽∠.... HEDGE TRIMMERS

TECHNICAL SPECIFICATIONS

122HD45	122HD60	322HD60	522HD60X
21.7	21.7	21.7	21.7
0.6	0.6	0.6	0.6
93	94	98	93
101	101	102	102
2.9/4.9	4.1/3.6	4.4/2.9	2.8/2.1
45	60	60	60
28	28	30	30
4050	4050	4,400	4400
4.7	4.9	5.2	4.9
-	_	-	-
—	•	•	•
•	•	•	•
-	_	-	-
•	•	•	•
•	•	•	-
•	•	•	•
-	_	_	
-	_	-	-
•	•	•	•
-	_	-	•
-	=	-	-
_	_	_	
	21.7 0.6 93 101 2.9/4.9 45 28 4050 4.7 - - - - - - - - - - - - -	21.7 21.7 0.6 0.6 93 94 101 101 2.9/4.9 4.1/3.6 45 60 28 28 4050 4050 4.7 4.9 - - -	21.7 21.7 21.7 0.6 0.6 0.6 93 94 98 101 101 102 2.9/4.9 4.1/3.6 4.4/2.9 45 60 60 28 28 30 4050 4050 4.400 4.7 4.9 5.2 - - -

• = Available (•) = Accessory - = Not available *Equivalent sound pressure level at the operator's ear. measured according to EN ISO 11806 and ISO 22868, dB(A). Reported data for equivalent sound pressure level for the machine has a typical statistical dispersion (standard deviation) of 1 dB(A). **Noise emissions in the environment measured as sound power (LWA) in conformity with EC directive 2000/14/EC. Reported sound power level for the machine has a typical statistical dispersion (standard deviation) or tob(x). Note emissions in the environment measured as sound power (LWA) in comorning with EC onfective 2000/147EC Reported sound power measured as sound power (LWA) in comorning with EC onfective 2000/147EC Reported sound power measured as sound power (LWA) in comorning with EC onfective 2000/147EC Reported sound power measured as sound power (LWA) in comorning with EC onfective 2000/147EC Reported sound power measured as sound power (LWA) in comorning with EC onfective 2000/147EC Reported sound power (LWA) in comorning with EC onfective 2000/147EC Reported sound power (LWA) in Comorning with EC onfective 2000/147EC Reported sound power (LWA) in Comorning with EC onfective 2000/147EC Reported sound power (LWA) in Comorning with EC onfective 2000/147EC Reported sound power (LWA) in Comorning with EC onfective 2000/147EC Reported sound power (LWA) in Comorning with EC onfective 2000/147EC Reported sound power (LWA) in Comorning with EC onfective 2000/147EC Reported sound power (LWA) in Comorning with EC onfective 2000/147EC Reported sound power (LWA) in Comorning with EC onfective 2000/147EC Reported sound power (LWA) in Comorning with EC onfective 2000/147EC Reported sound power (LWA) in Comorning with EC onfective 2000/147EC Reported sound power (LWA) in Comorning with EC onfective 2000/147EC Reported sound power (LWA) in Comorning with EC onfective 2000/147EC Reported sound power (LWA) in Comorning with EC onfective 2000/147EC Reported sound power (LWA) in Comorning with EC onfective 2000/147EC Reported sound power (LWA) in Comorning with EC onfective 2000/147EC Reported sound power (LWA) in Comorning with EC onfective 2000/147EC Reported sound power (LWA) in Comorning with EC onfective 2000/147EC Reported sound power (LWA) in Comorning with EC onfective 2000/147EC Reported sound power (LWA) in Comorning with EC onfective 2000/147EC Reported sound power (LWA) in Comorning with EC onfective 2000/147EC Reported sound power (LWA) in Comorning wi

ALWAYS USE GENUINE HUSQVARNA LUBRICANTS AND SPARE PARTS FOR YOUR HEDGE TRIMMER


These high quality spare parts and lubricants are developed to facilitate the care and maintenance of your Husqvarna equipment and enable trouble-free operation and storage. Husqvarna recommend regular service done by qualified technicians using only Genuine Husqvarna original or recommended spare parts. This will support the product's performance and lifetime. See your owner's manual or consult your Authorised Husqvarna dealer if any uncertainty occurs.




522HDR60X	522HDR75X	522HS75X	522HSR75X	525HE3	525HE4
21.7	21.7	21.7	21.7	25.4	25.4
0.6	0.6	0.6	0.6	1.0	1.0
93	93	93	93	96	93
102	102	102	102	106	106
3.8/1.3	3.1/2.2	2.9/1.8	2.9/1.8	3.1/4.0	5.4/2.4
60	75	75	75	55	55
30.5	30.5	30	30.5	29	29
3200	3200	4400	3200	4300	4300
5.0	5.2	5.0	5.0	6.35	6.4
-	-	_	-	•	•
•	•	_	-	-	-
•	•	•	•	•	•
•	•	-	•	-	-
•	•	•	•	•	•
_	-	-	-	-	-
•	•	•	•	-	-
_	-	-	-	-	•
_	-	-	-	•	•
•	•	•	•	•	•
•	•	•	•	•	•
_	-	-	-	-	•
_	-	-	-	•	•
	21.7 0.6 93 102 3.8/1.3 60 30.5 3200 5.0 	21.7 21.7 0.6 0.6 93 93 102 102 38/1.3 3.1/2.2 60 75 30.5 30.5 3200 3200 5.0 5.2 - 0.1 - 0.1 0.1 0.1 <	21.7 21.7 21.7 0.6 0.6 0.6 93 93 93 102 102 102 38/1.3 3.1/2.2 29/1.8 60 75 75 30.5 30.5 30 3200 3200 4400 5.0 5.2 5.0 - - - - - - - - - - - - - - - - - - <td>217 217 217 217 0.6 0.6 0.6 0.6 93 93 93 93 102 102 102 102 38/1.3 31/22 29/18 29/18 60 75 75 75 305 305 30 305 3200 3200 4400 3200 5.0 5.2 5.0 5.0 - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - -</td> <td>21.7 21.7 21.7 21.7 25.4 0.6 0.6 0.6 1.0 93 93 93 93 102 102 102 102 38/13 3.1/22 2.9/18 2.9/18 3.1/40 60 75 75 55 55 305 30.5 30.5 2.9 2.9 3200 3200 4400 3200 4300 50 5.2 5.0 5.0 5.0 305 30.5 3.0 3.0 3.0 3.0 50 5.2 5.0 5.0 6.35 50 5.2 5.0 5.0 5.0 - - - - - - - - - - - - - - - - - - - - - - - - -</td>	217 217 217 217 0.6 0.6 0.6 0.6 93 93 93 93 102 102 102 102 38/1.3 31/22 29/18 29/18 60 75 75 75 305 305 30 305 3200 3200 4400 3200 5.0 5.2 5.0 5.0 - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - -	21.7 21.7 21.7 21.7 25.4 0.6 0.6 0.6 1.0 93 93 93 93 102 102 102 102 38/13 3.1/22 2.9/18 2.9/18 3.1/40 60 75 75 55 55 305 30.5 30.5 2.9 2.9 3200 3200 4400 3200 4300 50 5.2 5.0 5.0 5.0 305 30.5 3.0 3.0 3.0 3.0 50 5.2 5.0 5.0 6.35 50 5.2 5.0 5.0 5.0 - - - - - - - - - - - - - - - - - - - - - - - - -

____**__**_

NOMINAL POWER A new machinery directive (2006/42/EC) came into force on January 1.2010, requiring manufacturers to declare the nominal power of engines, in kilowatts (kW). The power rating of the engines indicated is the average net power output during a normal working situations and meets applicable noise regulations (at specified rpm, see owner manual) of a typical production engine for the engine model measured to SAE standard J1349/IS0 1585. Mass production engines may differ from this value. Actual power output for the engine installed in the final machine will depend on the operating speed, environmental conditions and other variables.



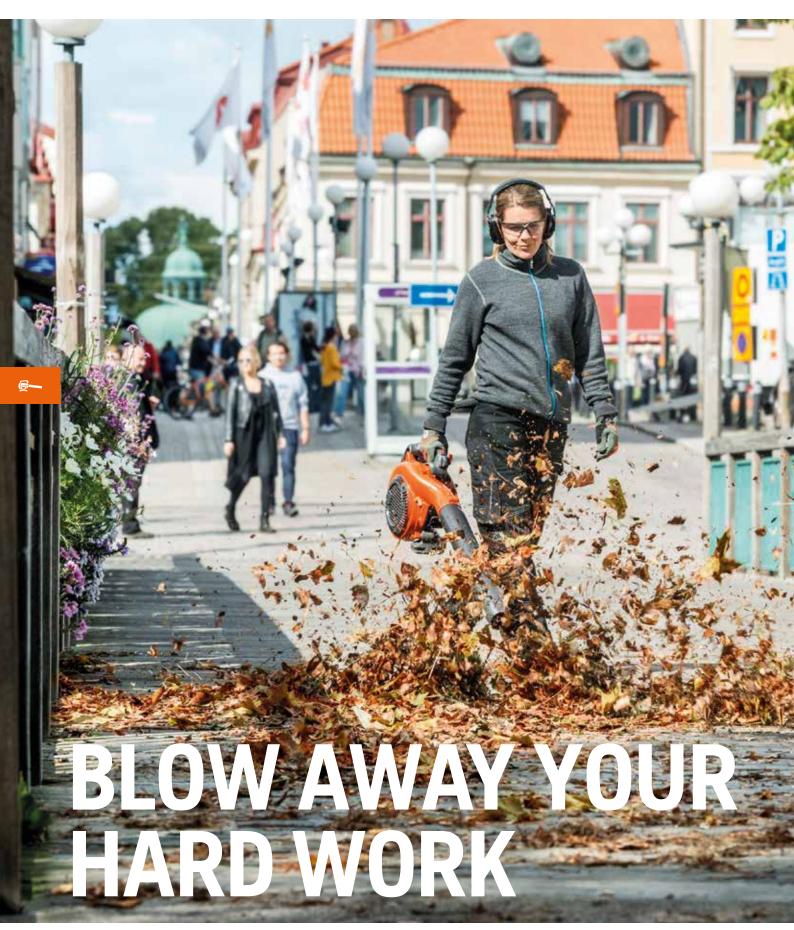

Get rid of leaves, straw, grass, cobwebs, sand, gravel – as well as the hard work. Husqvarna blowers are designed with the user in focus. Efficient and enjoyable to work with and with a range of jobs in-mind, you can be sure these blowers will handle the task effortlessly.



WHAT YOU GET AND HOW WE DO IT

HIGH POWER

Husqvarna blowers – regardless of power source – have high specification engines with optimised power output. The 580BTS delivers an air force of an impressive 40N, whereas the 550iBTX battery blower delivers 21N.

LOW NOISE

Our battery blowers offer very low noise, down to only 76.6 dB(A) on the 550iBTX. This provides a comfortable working situation for you and low disturbance for others when compared to petrol-driven machines. This makes them ideal for work in noise sensitive areas.

LONG SERVICE INTERVALS

The extensive filter area on the large petrol-powered blowers means reduced wear on the blower and longer operating time between filter cleanings.

LOW VIBRATIONS

Effective vibration damping relieves stress on the arms and hands to keep you alert and productive throughout the day.

BLOW OR VACUUM

The 125BVX can easily be turned into vacuum mode, giving you the possibility to efficiently collect debris.





1







AREAS WITH EASE

+ Outstanding blowing power

periods of heavy work.

+ Large areas

+ Top ergonomics

BLOW THE HARD WORK AWAY



Hip belt





The throttle handle on our blowers is positioned to neutralise the lateral forces generated by the air stream and the engine

Cruise control and boost functions are easily set with the intuitive keypad

High air pressure for smooth and efficient cleaning

In-line air outlet

HANDHELD BLOWERS VERSATILE

AND EFFICIENT

Perfectly designed for efficient work in smaller to medium sized areas. Our handheld blowers combine high power with great balance, making them perfect for a variety of lighter as well as more demanding tasks. The handheld range includes both battery and petrol-powered blowers.

- Small-medium sized areas + Great manoeuvrability
- + Petrol or battery power





POWERFUL AND LIGHTWEIGHT BATTERY BLOWERS

They produce no fumes and less noise - and many times they're just as powerful as their petrol-fueled equivalents. An excellent choice for challenging tasks indoors. Our battery blowers also offer low weight and smart features, along with a well-balanced design. Last but not least, they're easy to use: starting and stopping with a single button press on the intuitive keypad.

Read more about our battery series on page 14.

PRODUCT USE GUIDE

Use this guide to help you select the best product for your needs.

									ES, GRASS & S, LITTER AN		
TYPE OF USE	MODEL	POWER SOURCE	DISPLACEMENT (CM ³) / VOLTAGE	WEIGHT	ТҮРЕ	VACUUM	INDOOR USE	LOW DENSITY	MEDIUM DENSITY	LARGE DENSITY	PAG
	120iB	Li-ion acv	36V Li-ion	2kg*	Handheld		•	•			146
	120iBV	Li-ion asv	36V Li-ion	TBC	Handheld	•		•			146
OCCASIONAL USE (DOMESTIC / HOMEOWNER)	125B	Petrol	28cm ³	4.3kg	Handheld			•			146
	125BVX	Petrol	28cm ³	4.4kg	Handheld	•		٠			147
	325iB	Li-ion sev	36V Li-ion	2.4kg*	Handheld		•	•			147
	340iBT	Li-ion Jack	36V Li-ion	6.3kg*	Backpack		٠	٠	•		147
PART-TIME USE	345BT	Petrol	51.7cm ³	9.96kg	Backpack		•	•	•		147
	360BT	Petrol	65.6cm ³	10.5kg	Backpack		•	•	•		147
	525iB	Li-ion Jacv	36V Li-ion	2.5kg*	Handheld		•	•	0		148
	530iBX	Li-ion Janv	36V Li-ion	2.9kg*	Handheld		٠	٠	•		148
	525BX	Petrol	25.4cm ³	4.3kg	Handheld			٠	•		149
FULL-TIME USE (professional)	550iBTX	Li-lan 36V	36V Li-ion	6.3kg*	Backpack		•	•	•	ο	149
	570BTS	Petrol	65.6cm ³	11.2kg	Backpack			ο	•	•	149
	580BTS	Petrol	75.6cm ³	11.7kg	Backpack			0	•	•	149

The product selector is only to be used as a guide. Please visit your local Authorised Husqvarna dealer for more information.

* Excluding battery • Optimised solution (guideline only) • Capable solution but not optimal (guideline only)

OCCASIONAL / PART-TIME USE



Easy to use petrol and battery handheld blowers designed for domestic and part-time use. Products are ideal for clearing leaves and clippings around the home and garden. The battery handheld blower is ideal for use indoors and in enclosed spaces.

Ideal for applications including:

- Home and garden cleaning
- Path and driveways
- Noise sensitive areas (battery)
- Indoor and enclosed spaces (battery)



Lightweight easy to use battery blower designed for occasional use. Ideal for noise sensitive areas and use in covered spaces.

- 10.3 m³/min, 46m/s
- Brushless motor Kit includes B140 and C80
- In-line air outlet
- 3 performance modes

Voltage	Motor type	Vibration levels	Weight
36V Li-ion	BLDC Brushless	1.0m/s²	2kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
120iB Unit Only	967 97 61-01		
120iB Kit	967 97 61-03		



Tackle leaves with the multi-purpose and multi-speed 120iBV cordless leaf blower. Easy transition from blower to vacuum without using a tool, a brushless motor for optimised runtime and power, and a compact size.

- Multiple power modes
- Brushless motor
- Blower and vacuum combi • Digital user interface
- Kit includes B140 and C80

Voltage	Motor type	Vibration levels	Weight
36V Li-ion	BLDC Brushless	TBC	TBC
Model	Order PNC	RRP ex VAT	RRP inc VAT
120iBV Unit Only	970 64 98-02		
120iBV Kit	970 64 98-05		

125B



Ideal for homeowners, this well-balanced handheld blower combines power, ease of use and manoeuvrability.

- 12 m³/min, 58m/s Cruise Control
- Inline-outlet

Displacement	Power output	Vibration levels	Weight
28cm ³	0.8kW / 1.0hp	11.1m/s ²	4.3kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
125B	952 71 56-43		

6-

BLOWERS

ition /36V

125**BVX**



Ideal for homeowners, this well-balanced handheld blower and vacuum combines power, ease of use and manoeuvrability.

Smart Start®

Cruise Control

- Inline-outlet
- Vacuum kit

Displacement	Power output	Vibration levels	Weight
28cm ³	0.8kW / 1.0hp	11.1m/s²	4.4kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
125BVX	952 71 56-45		





With such ergonomic excellence on your back and premium performance in your hand, this compact petrol backpack leaf blower gives maximum productivity with minimal strain

- 21.6 m³/min, 78.2m/s
- · Easy cold starting
- Crui

Cruise Control			
Displacement	Power output	Vibration levels	Weight
51.7cm ³	1.6kW / 2.2hp	6.1m/s ²	9.96kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
345BT	970 46 69-03		

• 22N blow force

Padded harness



Powerful commercial-style backpack blower designed for demanding tasks.

- 25 m³/min, 104m/s
- X-Torg[®]
- · High blowing capcity Cruise Control
- · Easy cold starting
- Load reducing harness

	Loud roddollig harnood				
Displacement	Power output	Vibration levels	Weight		
65.6cm ³	2.84kW / 3.81hp	1.5m/s²	10.5kg		
Model	Order PNC	RRP ex VAT	RRP inc VAT		
360BT	967 14 43-04				

325iB



Lightweight easy to use battery blower designed for part-time use. Ideal for noise sensitive areas and use in covered spaces.

- 11.15 m³/min, 49m/s
- Brushless motor
- Boost effect
- 11N blow force
- Cruise Control

Voltage	Motor type	Vibration levels	Weight
36V Li-ion	BLDC Brushless	2.5m/s ²	2.4kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
325iB Unit only	967 99 10-01		

340iBT

NEW



Lightweight easy to use backpack battery blower designed for part-time use. Ideal for noise sensitive areas and use in covered spaces.

- 13.7 m³/min, 52m/s
- · Brushless motor
- 2 battery slots
- · In-line air outlet
 - Intuitive LED keypad

Voltage Motor type Vibration levels Weight 36V Li-ion **BLDC Brushless** 0.1m/s² 6.3kg (excl. battery) Model Order PNC RRP ex VAT RRP inc VAT 340iBT Unit only 967 79 62-03



Visit: www.husgvarna.com/uk/dealer-locator

Li-ion 36V

FULL-TIME USE



High performance petrol and battery handheld and backpack blowers designed for full-time professional use. With unique fan designs that generate high air velocity and powerful airflow the products are ideal for moving large volumes of dry or wet leaves and debris. Battery powered products are ideal for use in noise sensitive or enclosed spaces.

Ideal for applications including:

- Landscape maintenance
- Parks and public spaces
- Inner city cleaning
- Noise sensitive areas (battery)
- Indoor and enclosed spaces (battery)



A powerful and low weight handheld battery blower designed for professional use. Weatherproof (IPX4) and low noise, ideal for use in noise sensitive areas.

- Brushless motor
- Weatherproof (IPX4)
- Cruise control & Boost

Voltage	Motor type	Vibration levels	

Voltage	Motor type	Vibration levels	Weight
36V Li-ion	BLDC Brushless	TBC	2.5kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
525iB Mark II Unit only	967 91 55-03		



High performance ultra low noise battery blower designed for professional use. Backpack battery only and weatherproof (IPX4) for maximum performance.

- 14.1 m³/min, 56.2m/s
- Brushless motor
- Cruise control & Boost

• 77.6dB(A) noise level

Keypad with savE[™]Backpack battery use only

Voltage	Motor type	Vibration levels	Weight
36V Li-ion	BLDC Brushless	0.4m/s ²	2.9kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
530iBX Unit only	967 94 14-06		

525BX



Powerful, ultra low vibration handheld blower designed for professional use. Special fan and housing design and X-Torq[®] for high blowing capacity.

- 13 m³/min, 70m/s
- Smart Start[®]
- Inline-outlet
- X-Torq® • Low Vib®
- Cruise Control

Displacement	Power output	Vibration levels	Weight
25.4cm ³	0.85kW / 1.1hp	1.2m/s ²	4.3kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
525BX	967 28 42-01		



Powerful and ergonomic backpack battery blower for professional use. Extremely low noise and vibration levels and weatherproof (IPX4) giving maximum flexibility and productivity.

• 12.8 m³/min,546m/s

Cruise control & Boost

- Brushless motor
- 76.6dB(A) noise level
 Keypad with savE[™]
- Backpack battery use only

Voltage	Motor type	Vibration levels	Weight
36V Li-ion	BLDC Brushless	0.1m/s ²	6.3kg (excl. battery)
Model	Order PNC	RRP ex VAT	RRP inc VAT
550iBTX Unit only	967 68 11-05		

570BTS



High performance professional backpack blower designed for the movement of large volumes of debris spread over large areas.

- 22 m³/min, 106m/s
- Low Vib®
 Offset handle
- X-Torq®Ergo harness
- Cruise Control

Displacement	Power output	Vibration levels	Weight
65.6cm ³	2.9kW / 3.8hp	1.8m/s²	11.2kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
570BTS	966 62 94-01		

580BTS



Our most powerful professional backpack blower designed for movement of the largest volumes of debris spread over large areas.

• 26 m³/min, 92m • Low Vib® • Ergo harness	/s	 X-Torq[®] Air Injection[™] Offset handle 	
Displacement	Power output	Vibration levels	Weight
75.6cm ³	3.1kW / 4.2hp	1.6m/s²	11.8kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
580BTS	966 62 96-01		



TECHNICAL SPECIFICATIONS

Cylinder displacement, cm³2828Power output, kW0.80.80.8Sound pressure level at operators ear, dB(A)*949494Sound pressure (15 m), dB(A)707070Sound power level guaranteed (LWA), dB(A)**107107107Equivalent vibration level (ahv, eq) handle, m/s²***11.111.111.1Air speed, m/s58.058.058.0Air flow in housing, m³/min13.313.313.3Air flow in pipe, m³/min121212Vac bag capacity, litres-64.34.4Weight, kg4.34.4104		125B	125BVX	
Cylinder displacement. cm³2828Power output. kW0.680.8Sound pressure level at operators ear. dB(A)*9494Sound pressure (15 m). dB(A)7070Sound pressure level guaranteed (LWA). dB(A)**107107Equivalent vibration level (ave og) handle. m/s²***11.111.1Air speed, m/s58.058.0Air flow in pusing. m³/min13.313.3Air flow in pusing. m³/min1212Vac bag capacity, lites-64.3Weight. kg4.34.4PEATURESAdustable handleAuto-return stop switchCommercial grade air filterCommercial grade air filterCruise contolErgonomic harnessFuel pumpIn lined outletLow Vb%Mukhing functionSmart Start%Smart Start%Smart Start%Smart Start%Smart Start%Smart Start%Smart Start%Smart Start%Start Start%Source StartStart Start%Start Start%Start Start%Start Start%<				
Joint output Num Image: Constraint output Num OR OR Sound pressure level at operators ear. dB(A)* 94 94 94 Sound pressure (15 m). dB(A) 70 70 70 Sound pressure (15 m). dB(A) 107 107 107 Equivalent Vibration level (WA), dB(A)** 107 107 107 Equivalent Vibration level (WA), dB(A)** 11.1 11.1 11.1 Air speed m/s 58.0 58.0 58.0 Air flow in housing m³/min 13.3 13.3 13.3 Air flow in pipe, m³/min 12 12 12 Vac bag capacity, litres - 64.3 64.3 Weight, kg 4.3 4.4 64.3 Features - - 1.0 1.0 Adjustable handle - - - 1.0 1.0 Auto-return stop switch - - - 1.0 1.0 1.0 1.0 1.0 1.0 1.0 1.0 1.0 1.0 1.0 <t< td=""><td>TECHNICAL SPECIFICATIONS</td><td></td><td></td><td></td></t<>	TECHNICAL SPECIFICATIONS			
Power output. kW0.80.80.8Sound pressure level at operators ear. dB(A)*949494Sound pressure level at operators ear. dB(A)*707070Sound power level guaranteed (LMA). dB(A)**107107107Equivalent vibration level (ahv. eg) handle, m/s ^{2***} 11111.111.1Ari speet m/s58.058.058.0107Air flow in housing, m ³ /min13.313.313.313.3Air flow in pipe, m ³ /min121212107Vac bag capacity, litres-64.3107107Auf our in pipe, m ³ /min4.34.4107107Adjustable handle107107Adjustable handle107107Auto-return stop switch107107Confort handle107107107Cruise control107107107Ergonomic handle107	Cylinder displacement, cm ³	28	28	
Sound pressure (15 m). dB(A)7070Sound poressure (15 m). dB(A)**107107Sound power level guaranteed (LWA). dB(A)**107107Equivalent vibration level (ahv. eq) handle. m/s ^{2***} 11.111.1Air speed. m/s58.058.0Air flow in busing.m ³ /min13.313.3Air flow in pipe.m ³ /min1212Vac bag capacity. litres-64.3Weight. kg4.34.4Adjustable handleAlir flow in pipe.m ³ /minAdjustable handleAuto-return stop switchConfort handleConfort handleConfort handleCruise controlErgonomic handleErgonomic handleInlined outletLow Vb®Muchting functionStart®Start®Cruise controlFuel punpInlined outletLow Vb®Mulching functionSmart Start®Vac capable	Power output, kW	0.8	0.8	
Sound pressure (15 m). dB(A)7070Sound poressure (15 m). dB(A)**107107Sound power level guaranteed (LWA). dB(A)**107107Equivalent vibration level (ahv. eq) handle. m/s ^{2***} 11.111.1Air speed. m/s58.058.0Air flow in busing.m ³ /min13.313.3Air flow in pipe.m ³ /min1212Vac bag capacity. litres-64.3Weight. kg4.34.4Adjustable handleAlir flow in pipe.m ³ /minAdjustable handleAuto-return stop switchConfort handleConfort handleConfort handleCruise controlErgonomic handleErgonomic handleInlined outletLow Vb®Muchting functionStart®Start®Cruise controlFuel punpInlined outletLow Vb®Mulching functionSmart Start®Vac capable	Sound pressure level at operators ear, dB(A)*	94	94	
Equivalent vibration level (ahv, eq) handle.m/s²***11.111.111.1Air speed.m/s580580580Air flow in housing.m³/min13.313.313.3Air flow in pipe.m³/min121212Vac bag capacity.litres-64.310Weight.kg4.34.410Adjustabe handle6.1Adjustabe handleAdjustabe handleAri hjecton [™] Adjustabe handleComfort handleComfort handleCommercial grade air filterCruis controlErgonomic handleFuel pumpIn lined outletLow Vib [®] Mulching function </td <td>Sound pressure (15 m), dB(A)</td> <td>70</td> <td>70</td> <td></td>	Sound pressure (15 m), dB(A)	70	70	
Equivalent vibration level (ahv, eq) handle.m/s²***11.111.111.1Air speed.m/s580580580Air flow in housing.m³/min13.313.313.3Air flow in pipe.m³/min121212Vac bag capacity.litres-64.310Weight.kg4.34.410Adjustabe handle6.1Adjustabe handleAdjustabe handleAri hjecton [™] Adjustabe handleComfort handleComfort handleCommercial grade air filterCruis controlErgonomic handleFuel pumpIn lined outletLow Vib [®] Mulching function </td <td>Sound power level guaranteed (LWA), dB(A)**</td> <td>107</td> <td>107</td> <td></td>	Sound power level guaranteed (LWA), dB(A)**	107	107	
Air flow in housing. m³/min13.313.3Air flow in pipe, m³/min1212Vac bag capacity. litres-64.3Weight. kg4.34.4FEATURESAdjustable handleAir Injection™Auto-return stop switchConfort handleConfort handleConfort handleConfort handleCurise controlErgonomic harnessFuel pumpIn lined outletLow Vib®Mulching functionSmart Start®Vac capableOrder Start®Auto-return stop switchCommercial grade air filterConserverial grade air filterCruise controlErgonomic hardleErgonomic hardleFuel pumpIn lined outletLow Vib®Smart Start®Vac capableVac capable		11.1	11.1	
Air flow in pipe, m³/min1212Vac bag capacity, litres-64.3Weight, kg4.34.4FEATURESAdjustable handleAir Injection**Auto-return stop switchCornfort handleCornfort handleCornfort handleCornfort handleCornfort handleCornfort handleErgonomic handleErgonomic handleIn lined outletKuby®Mulching functionMulching functionSmart Start®Vac capableVac capable	Air speed, m/s	58.0	58.0	
Air flow in pipe, m³/min1212Vac bag capacity, litres-64.3Weight, kg4.34.4FEATURESAdjustable handleAir Injection**Auto-return stop switchCornfort handleCornfort handleCornfort handleCornfort handleCornfort handleCornfort handleErgonomic handleErgonomic handleIn lined outletKuby®Mulching functionMulching functionSmart Start®Vac capableVac capable	Air flow in housing, m ³ /min	13.3	13.3	
Weight, kg4.34.4FEATURESAdjustable handleAir Injection™Auto-return stop switchComber LandleComber LandleComber LandleComber LandleComber LandleComber LandleComber LandleComber LandleCruise controlErgonomic handleErgonomic handleErgonomic handlesErgonomic handles <td></td> <td>12</td> <td>12</td> <td></td>		12	12	
FEATURES Image: constraint of the second of the secon	Vac bag capacity, litres	-	64.3	
FEATURES Image: constraint of the second of the secon	Weight, kg	4.3	4.4	
Adjustable handleAir Injection™				
Air hjection™Auto-return stop switch●●Comfor handle-●Commercial grade air filter-●Commercial grade air filter●●Cruise control●●Ergonomic handle-●Ergonomic handle-●Ergonomic handle●●In lined outlet●●Low Vib®-●Mulching function●●Smart Start®●●Vac capable●●Output●●<	FEATURES			
Auto-return stop switch●●●Comfort handle-●●●Commercial grade air filter●●Cruise control●●●●●Ergonomic handle●●Ergonomic harness●●●●●●In lined outlet●●<	,	—	_	
Comfort handle-••Commercial grade air filterCruise control•••••Ergonomic handleErgonomic harness••	Air Injection™	-	_	
Commercial grade air filterCruise control66Ergonomic handleErgonomic harnessFuel pump66In lined outlet66Low Vib®Mulching function6Smart Start®6Vac capable6		•	•	
Cruise control●●●Ergonomic handleErgonomic harnessFuel pump●●●●●In lined outlet●●●●●Low Vib®●●Mulching function-●●●●Smart Start®-●●●●Vac capable-●●●●		—	•	
Ergonomic handleErgonomic hannessFuel pumpIn lined outletLow Vib®Mulching functionSmart Start®Vac capableIn the start start starteIn the starte	Commercial grade air filter	—	—	
Ergonomic harnessFuel pump●●In lined outlet●●Low Vib®Mulching function-●Smart Start®-●Vac capable-●	Cruise control	•	•	
Fuel pump●●In lined outlet●●Low Vib®Mulching function-●Smart Start®-●Vac capable-●	-		-	
In lined outlet ● ● ● Low Vib® - - - Mulching function - - - Smart Start® - - - Vac capable - - -	Ergonomic harness		-	
Low Vib® Mulching function 6 Smart Start® 6 Vac capable 6	Fuel pump	•	•	
Mulching function Image: Constraint of the second of t	In lined outlet	•	•	
Smart Start® ● Vac capable ●	Low Vib®		-	
Vac capable – •	Mulching function		•	
	Smart Start®	—	•	
X-Torq® engine – –	Vac capable	—	•	
	X-Torq [®] engine	—	—	

• Available (•) = Accessory — = Not available *Equivalent sound pressure level at the operator's ear. measured according to ENI5503 dB (A). The equivalent sound pressure level value is calculated with a work cycle of a duration of 1/7 for iding and 6/7 for racing. Reported equivalent sound pressure level for the machine has a typical statistical dispersion (standard deviation) of 1 dB(A). **Noise emissions in the environment measured as sound power (LWA) in conformity with EC directive 2000/14/EC. The guaranteed sound power level includes variation in production as well as variation from the test code with 1–3 dB(A). ***Equivalent vibration level value is calculated with a work cycle of a duration of 1/7 iding and 6/7 for racing. Reported equivalent vibration level value is calculated with a work cycle of a duration of 1/7 iding and 6/7 for racing. Reported data for equivalent vibration level value is calculated with a work cycle of a duration of 1/7 iding and 6/7 for racing. Reported data for equivalent vibration level has a typical statistical dispersion (standard deviation of 11/7³).

NOMINAL POWER A new machinery directive (2006/42/EC) came into force on January 1. 2010, requiring manufacturers to declare the nominal power of engines, in kilowatts (kW). The power rating of the engines indicated is the average net power output during a normal working situations and meets applicable noise regulations (at specified rpm, see owner manual) of a typical production engine for the engine model measured to SAE standard J 1349/ISO 1585. Mass production engines may differ from this value. Actual power output for the engine installed in the final machine will depend on the operating speed, environmental conditions and other variables.

 345BT	360BT	525BX	570BTS	580BTS
 51.7	65.6	25.4	65.6	75.6
 1.6	2.84	0.85	2.9	3.1
110	104	91	99	100
78	77	71	76	77
113	111	106	110	112
6.1	2.5	1.2	1.8	1.6
78.2	104	70.0	106	92.0
21.6	25	13.9	28.0	29.0
 12.8	18	13	22	26
-	_	-	-	_
 9.96	10.5	4.3	11.2	11.8
_	•	-	•	•
_	-	-	-	•
•	•	•	-	-
-	-	•	•	•
-	-	•	•	•
•	•	•	•	•
_	_	•	•	•
_	-	-	•	•
•	•	•	•	•
 •	•	•	-	-
—	-	•	•	•
—	—	—	—	-
—	_	•	-	-
 -	-	-	-	-
_	•	•	•	•



POWER CUTTERS

K 535i



Battery power cutter designed for lighter concrete jobs. Ergonomic and low weight design makes it ideal for landscapers, pavers and roofers. Thanks to low vibration levels, slim design and centred placement of the blade, you get superior control compared to conventional cutters.

- 230mm / 9" blade
- Cutting depth
- Keypad with savE[™] Integrated dust
- 76mm / 3" suppression
- Electric retarder Centred blade
- Weatherproof (IPX4) Simple blade change
- Specially developed Rope eyelet
- blades

Voltage	Motor T	уре
36V Li-ion	BLDC Bru	shless
Vibration level	Weig	ht
2.1 / 2.5m/s²	3.5kg (excl.	battery)
Model	Order PNC	RRP ex VAT
K 535i unit only Unit + BLi200 & QC330	967 79 59-01 967 98 30-01	
acti-Cut S BAT 35s 9" blade	596 52 03-01	

DRILLING

ι Ta

DM 540i



K 770



The K 770 is a powerful all-round power cutter. The light weight, outstanding power-to-weight ratio, reliable start and exceptionally low vibrations mean less strain and maximised productivity.

- X-Torq[®]
- Active Air Filtration™
- SmartCarb[™]
- DuraStarter[™]
- Low Vib[®] SmartTension[™]
- (12" / 300mm) Cutting depth 125mm

· Supplied with Tacti-Cut

Cutting depth 100mm

S 50 / + blade

- (14" / 350mm) Displacement Power output 74cm³ 3.7kW Vibration level Weight 2.4/2.4 m/s² 10 / 10.1kg Model Order PNC RRP ex VAT K 770 12" with blade 967 80 86-01 Tacti-Cut S 50 12"blade 579 81 64-11
- K 770 14" with blade 967 68 21-01 Tacti-Cut S 50 14"blade 579 81 56-20

K 1 PAC



The K1PACE is a high power battery disc cutter which has the power and performance you expect from equivalent petrol-powered cutters. Ergonomic and user-friendly with low vibrations, optimally balanced machine and zero direct emissions.

 Cutting depth 119mm
 Weatherproof (IPX4) (12" / 300mm)

(14" / 350mm)

- Specially developed Cutting depth 136.5mm blades®
 - PACE 94v battery
- X-Halt[™] brake function system for operational safety

Voltage	Motor t	уре
94V Li-on	BLDC (bru	shless)
Vibration level	Weig	ht
2.2 / 1.2m/s ²	7.2 / 7.4kg (excl. b	attery and blade)
Model	Order PNC	RRP ex VAT
Model K 1 PACE 12"	Order PNC 970 44 58-03	RRP ex VAT
model	970 44 58-03	RRP ex VAT
K 1 PACE 12"	970 44 58-03	RRP ex VAT

The DM 540i is a powerful battery drill motor optimised for handheld drilling of diameters up to 75 mm. It can be used in light reinforced concrete for both wet and dry drilling and other suitable materials including bricks and light weight blocks. DM 540i can be used with the DS 150 drill stand for drilling of diameters up to 100 mm.

Voltage	Motor type	Weight
36V Li-on	BLDC (brushless)	4.9kg (excl battery)
Model	Order PNC	RRP ex VAT
DM 540i	970 49 37-01	

FLOOR SAWS



Low vibrations

Low maintenance



The FS 305 is our lightweight and compact petrol push floor saw for asphalt and concrete cutting. Ideal for job sites that are difficult to access and for small repair jobs. It is very easy to handle and can be transported in a small vehicle.

Cutting depth 125mm (14" / 350mm)

Power	Fuel	Vibration level	Weight
3.6kW	Petrol	4.7 / 4.4m/s ²	54kg
Model	Order PNC	RRP ex VAT	
FS 305	965 15 00-26		

FS 400LV



· Easy to operate and transport · Large integrated water tank

The FS 400 LV is a convenient all-round petrol push floor saw. The adjustable handle ensures an ergonomic working position. Perfect weight distribution gives excellent stability while sawing. Ideal for small road repair jobs in concrete or asphalt.

Cutting depth 162mm (18" / 450mm)

Power	Fuel	Vibration level	Weight
8.7kW	Petrol	3.5 / 3.5m/s²	99kg
Model	Order PNC	RRP ex VAT	
FS 400LV	965 14 82-01		





MASONRY SAWS

TS 350 E



The TS 350 E is an efficient universal masonry saw with high cutting capacity for all kinds of bricks and building blocks. You can easily plunge or bevel cut at 45 degrees for maximum versatility. The robust single-piece frame with integrated conveyor rails gives great rigidity and provides longer product life.

 Cutting depth 100mm (200mm step cutting)

Power	Voltage	Weight
1.5kW	110 V	92kg
Model	Order PNC	RRP ex VAT
TS 350 E	965 14 80-03	

TAMPING RAMMERS

LT 5005

· Foldable legs · Versatile and easy



The LT 5005 is a well-balanced and lightweight yet powerful rammer, developed for efficient compaction of granular and cohesive soils such as clay and silt. Ideal for compaction in trenches or other narrow spaces, for example around pillars and pipes.

- Honda GXR 120 engine, specifcally for rammers
- Two versions 150 and 230mm plate width

Power	Fuel	Vibration level	Weight
2.7kW	Petrol	6.4m/s ²	61 / 62kg
Model	Order PNC	RRP e	ex VAT
LT 5005 6"	967 85 46-04		
LT 5005 9"	967 85 46-03		

FORWARD PLATE COMPACTORS

LF 50 L



The LF 50 L is an ideal forward plate for smaller projects like pathways and is easy to lift and transport. The exclusive, patented low-vibration handle protects you from unhealthy vibration levels and the compact design with foldable handle make transportation and storage easy.

- · Flat bottom plate
- Block paving kit available
- Wheel kit available

Power	Fuel	Vibration level	Weight
2.3kW	Petrol	6.9 (1.8 with reduced handle m/s ²	53kg
Model	Order PNC	RRP e	ex VAT
LF 50 L	967 85 47-02		

TS 400 F

· Easy to set-up



The TS 400 F is an efficient universal masonry saw with high cutting capacity for all kinds of bricks and building blocks. You can easily plunge or bevel cut at 45 degrees for maximum versatility. The robust single-piece frame with integrated conveyor rails gives great rigidity and provides longer product life.

 Cutting depth 125mm (230mm) step cutting)

Power	Voltage	Weight
1.5kW	110 V	96kg
Model	Order PNC	RRP ex VAT
TS 400 F	965 14 81-07	



husqvarna.com/power-cutters

LF 80 L



The LF 80 L is a fast and hardhitting forward plate which can also be fitted with a water tank. The exclusive, patented low-vibration handle protects you from unhealthy vibration levels and the compact design with foldable handle makes transportation and storage easy.

- Convex bottom plate enables use of water and reduce marks
- Block paving kit available

•	Whee	l kit av	vailable	

Power	Fuel	Vibration level	Weight
3.6kW	Petrol	6.7 (1.2 with reduced handle m/s ²	84kg
Model	Order PNC	RRP e	ex VAT
LF 80 L	967 85 50-01		

Cod



LAWN MOWING CONCEPT

WHATEVER YOU LOOK FOR IN A MOWER

When you're looking for a lawn mower there are many questions you will ask, and we have an extensive range of grass cutting machines to answer all of them. From self-propelled mowers to ride-on machines, different cutting methods, and attachments to give more versatility and year round use. Most of all, choosing Husqvarna means you can be sure you are buying a machine that delivers the results you expect and has the quality to keep doing this year after year.



- Fully automatic
- Excellent lawn quality
- Outstanding slope performance
- Li-ion battery power
- Quiet operation
- No handling of grass clippingsConnectivity

Husqvarna

AUTOMOWER® ROBOTIC LAWN MOWERS PERFECT RESULTS, EVEN IN SLOPES AND COMPLEX AREAS

If a well-kept lawn is at the top of your wish list and lawn mowing is close to the bottom, then a robotic lawn mower will give you the best solution. In fact, unless you are a really skilled lawn care specialist, you'll hardly be able to beat this robot when it comes to producing an excellent result. On especially demanding lawns, you can rely on the hard working robotic mower Automower® AWD, where the excellent all-wheel-drive easily handles slopes of up to 70%, around the clock, day in day out.

WALK BEHIND LAWN MOWERS TRADITIONAL LAWN MOWING JUST GOT EASIER

For those who have decided on having a walk behind lawn mower, we can offer a range of machines that will fit many different types of lawns and users. If you want the versatility of different cutting methods, we recommend the collector models which also give you both mulching and rear-eject options when mowing your lawn. Because we understand that every lawn is different, you'll find a machine that has all the features you need for great results and enjoyable work.

- + Outstanding manoeuvrability
- + Versatile cutting system
- + Collector
- + BioClip®
- + Available with battery power
- + Connectivity

LAWN MOWING CONCEPT




ZERO-TURN MOWERS REMARKABLE RESULTS ON LARGE AREAS


If high capacity, excellent cutting results and precise manoeuvring is the combination for you, look no further. Husqvarna zero-turn mowers not only offer high levels of productivity, but are engineered to withstand the demands of any mowing job. Cutting edge ergonomics and comfort features provide everything needed to meet the requirements of demanding residential applications as well as commercial landscapers.

- Outstanding manoeuvrability
- Versatile cutting system
- + ClearCut[™] cutting deck
- + Zero turning radius
- + Outstanding comfort

RIDERS SUPERB IN TIGHT AND HARD TO REACH SPACES

If you want to enjoy the ride while easily getting around every obstacle, then the Husqvarna Rider is undoubtedly the mower for you. It has many features and also a wide range of attachments to get the job done. The articulated steering gives the Rider excellent manoeuvrability and a small turning radius. The front-mounted deck can cut under hard to reach places, such as bushes or along fences with no problems.





Husqvar

With high quality performance and easy operation, the Husqvarna tractors bring versatility to the garden workload. Their wide range of attachments and a built-in choice of cutting methods give our garden tractors excellent versatility. Ideal for efficient lawn care and various tasks around your land. The Husqvarna tractors can be fitted with trailers, spreaders, snow throwers and more, turning them into year round garden work horses.

- + Versatile cutting system
- + Collector
- + BioClip®
- + Year round use
- + Outstanding comfort



155





What does it take to make a robotic mower that can work around the clock to deliver a well-kept lawn in every garden – despite bad weather, complex shapes, steep slopes, narrow passages and other obstacles? We would say, it takes over 25 years of innovation, testing and refinement. Since 1995 we have been developing the original Husqvarna Automower® robotic mowers into the most proven, reliable and extensive range available, with one to suit any garden.







WHAT YOU GET **AND HOW WE DO IT**

INSTALL AND FORGET

Husqvarna Automower® robotic mowers are equipped with advanced technical solutions to deliver the highest level of reliability, quality and mowing results. This means maintenancefree operation and minimum service, giving you more free time to focus on the things that really matter.

BEAUTIFUL RESULTS

Uniquely-designed cutting system - three razor-like carbon steel cutting blades, placed behind a skid plate, making clean cuts. Shorter clippings means better fertilising, excellent cutting result with no moss and less energy consumption. And no clippings to rake and dispose of.

SUPERIOR SLOPE PERFORMANCE

Husqvarna's all-wheel drive robotic mower will make easy work out of the most demanding lawns. Since it manages slopes of up to an impressive 70% (35°) incline, it delivers perfect results even for the most challenging of areas.

HAPPY NEIGHBOURS

Our environmentally-conscious robotic lawn mowers are powered by battery. They cut the grass without harmful direct emissions and are very quiet. Neither you nor your neighbours will notice the mower rolling around doing its job.

CONNECTIVITY

Our free of charge mobile app allow you to communicate easily with your mower (except model 105). Automower® Connect from anywhere via the mobile phone network or the short distance solution Automower® Connect@HOME via Bluetooth®.











Drive motors with Ultrasilent technology enable extremely low noise levels

Remote object detection makes the mower slow down before bumping into an object

Automower® Access - interact intuitively via high resolution colour display and jog wheel (Automower® 435X AWD)

> Low weight and smart design allows for high capacity and low energy consumption

All-wheel-drive and unique articulated body design with excellent manoeuvrability - for complex and steep gardens

EXCELLENT SLOPE PERFORMANCE

Thanks to the all-wheel-drive, Husqvarna Automower® AWD can cope with slopes up to 70% (35°) whereas other models manage slopes of up to 45% (24°).

> GPS-assisted navigation ensures uniform cutting result in complex gardens

> > Energy efficient LED lights for better visibility during night time mowing

> > > Weather timer automatically adapts the amount of mowing to the lawn growth rate - for a carefree operation

CARE Find out more on page 289

GPS-ASSISTED NAVIGATION FOR OPTIMAL MOWING IN **COMPLEX AREAS**

Husqvarna Automower® X-Line & 500 Series have an onboard GPS system that creates a map of the lawn. The robotic mower knows exactly which parts of the lawn it has covered and optimises the mowing pattern automatically.



AUTOMOWER® CONNECT JUST ADD A SMARTPHONE

Automower® Connect is a feature that gives you full control of the mower right in your smartphone. You can send start, stop and park commands, check and adjust the settings, and also receive alarms and track your mower's position in case of theft wherever you are. Standard on X-Line, 500 Series and AWD models. Read more on page 176. **10 YEARS OF FREE CONNECTIVITY INCLUDED!**



WHY A HUSQVARNA AUTOMOWER® ROBOTIC MOWER WILL IMPROVE THE QUALITY OF YOUR LAWN

Husqvarna Automower[®] uses razor-sharp blades to cut every blade of grass little by little, resulting in a lush, green lawn that conventional blades cannot achieve. The lawn is mowed frequently, in rain and shine, producing grass clippings so small that no collection is needed. The clippings become natural fertiliser, keeping your lawn lush, green and moss free.

The Weather timer function adapts the time spent mowing so Husqvarna Automower® works more in periods of strong grass growth and less in dry, sunny weather. And the electric cutting height adjustment enables you to adjust the length of your grass with a simple push of a button on the keypad, or remotely with the Automower® Connect smartphone app (X-Line and 500 Series models only).



EVERY GARDEN IS UNIQUE – INCLUDING YOURS

That said, the many different models in the wide Automower® range cover everything from smaller urban gardens to challenging areas up to 5,000m². Ensuring full coverage of complex lawns with remote areas and narrow spaces is a hallmark of the Automower® robotic mower. Tough slopes and uneven ground are matched by large wheels, low centre of gravity and optimized balance. If you have a garden with extreme challenges, our all-wheel drive model can tackle slopes up to an impressive 70 %.

THINGS TO CONSIDER WHEN BUYING A HUSQVARNA AUTOMOWER® ROBOTIC MOWER

To decide which robotic mower is most suitable for your needs, there are a few things to consider as mentioned below: Your desired working hours, the size of your lawn and the complexity in terms of slopes, shape, passages and other obstacles. Visit the Robotic Lawn Mower section on the Husqvarna website for more information and guidance. There you will also find our interactive Automower® Garden Guide to help you decide.





WORKING HOURS

Your robotic mower shouldn't be working while your family members want to play and relax on the lawn. Make sure you choose a Husqvarna Automower[®] with enough capacity to mow the entire lawn during the time when your lawn is free of activity. All models are ideally suited to night time operation, the low noise levels ensure there is no disturbance.



NO NOISE, NO FUMES, NO WORRIES

Automower[®] will make good friends with your garden as well as your neighbours. It keeps your lawn in shape using a minimal amount of energy, it requires no petrol or oil, and there are no emissions or fumes. Automower[®] also has the lowest perceived noise levels on the market. With its low energy consumption, and no fuel or emissions to worry about, Automower[®] is an eco-smart choice.





HOW IT WORKS!

Cutting little and often, leads to more efficient cutting and healthier grass.

Boundary wire

Guide wire -



It's easy to set up

The working area and areas you want your Automower* robotic mower to avoid are defined by a boundary wire, which is easily laid out around the desired cutting area.

Visit husqvarna.com to learn more.

Navigation

- The boundary and guide wires are staked to the lawn or buried just below the surface. A staked wire disappears into the lawn after a few weeks.
- The mower stays inside the boundary wire laid around the perimeter of the working area.
- The charging station transmits a signal to the wire that guides the mower where to cut and also guides it to the charging station.

Irregular movement pattern

- No need for specific programming.
- Covers all parts even if the lawn is complex and/or contains trees, flowerbeds, passages, etc.
- Allows the grass to get cut from different directions,creating a smooth carpet-like surface.



TRADITIONAL VS AUTOMATIC MOWING TECHNIQUE

The principal function of the Husqvarna Automower® provides the service of a well cut lawn, not just a lawn mower. Things like horsepower, cutting width and technical details become less important with a Husqvarna Automower® that cuts your lawn day in, and day out.



Ø

Recharging

When it's time to recharge, the robotic mower finds the charger by using one of three methods:

- By picking up a signal from the charging station antenna.
- By following the guide wire back to the charging station.
- By following the boundary wire until it's within reach of the home signal.

Efficient cutting technique

- The grass is cut with three fine, razor-sharp blades.
- ➡ The three free-hanging blades are mounted on a disc and are easily replaced.
- The blades can rotate back into the disc to minimize damage, should they hit hard objects — stones, branches, etc.
- The grass clippings are so fine and small they don't need to be collected.

Impressive cutting result

Automower[®] uses razor-sharp blades to cut every blade of grass, resulting in a lush, green lawn that conventional blades cannot achieve. The grass clippings become a natural fertilizer, helping to keep lawns lush, green and moss free.

Collision and lift sensors

Collision and lift sensors increase safety. When the mower runs into an object it'll reverse, turn and choose another direction. If it's lifted, the blade and mower will stop immediately.

Mowing cycle

- + The concept is to keep short grass short.
- Automower[®] finds the charging station automatically.
- Charges for approximately 60 minutes.
- Resumes mowing, day in and day out regardless of the weather (except snow).

THE WORLD LEADER IN ROBOTIC MOWING

Husqvarna Automower[®] buying guide




TO FIND OUT MORE AND SEE AUTOMOWER® IN ACTION, FOLLOW US ON SOCIAL:

WWW.YOUTUBE.COM/HUSQVARNAUK

O@ @HUSQVARNAUK

How to calculate your lawn's inclination

Place a spirit level on the ground and hold it horizontally level. Measure the distance to the ground from the end of the level that does not meet the ground. Then divide that distance by the length of the level. The result you get is the inclination in %. An example: If the distance is 10 cm and the length of your spirit level is 50 cm, the inclination is 20%.









MORE FREE TIME

Husqvarna Automower[®] robotic mowers free you from the chore of cutting your lawn allowing you to spend time on the things that really matter.



ADVANCED NAVIGATION

Several navigation tools, including GPS (on X-Line & 500 Series), ensure Husqvarna Automower® covers your entire lawn, even in complex gardens.



AUTOMOWER® CONNECT

Control the operation of your Husqvarna Automower® from your iOS or Android smartphone, including location and theft alarm.



MANAGES STEEP SLOPES

Husqvarna Automower[®] can cope with slopes up to 70% (35°), thanks to optimised design and smart behaviour.



LOW ENERGY CONSUMPTION

Husqvarna Automower[®] uses as little as 20W energy when in use, comparable to an traditional style light bulb.



SMART HOME INTEGRATION

Automower[®] Connect using the smart phone app allows you to integrate your Husqvarna Automower[®] into your Smart Home. Giving you complete control.



CUTS UNEVEN LAWNS

Large wheels and a clever chassis design ensures a perfect result even on a rough lawn.



NO CLIPPINGS

Husqvarna Automower[®] cut little and often recycling the micro-clippings back into the soil as natural fertiliser improving lawn health.



NO NOISE. NO FUSS

WORKS IN THE RAIN

You'll hardly notice it as it rolls around your garden doing its job quickly, quietly and efficiently. No noise, no fuss – just a great looking lawn.



Husqvarna Automower[®] gives you great cutting results in any type of weather. Its vital parts are safely protected from rain, as well as dust and

grass clippings.

MANAGES PASSAGES

Husqvarna Automower[®] senses narrow passages and finds its way through even the narrowest gaps.



NO TRACK MARKS

Husqvarna Automower[®] varies its route back to the charger in order to avoid damage and ugly tracks. Mowing in a seemingly random pattern, gives a carpet-like lawn, throughout your garden.

SUSTAINABILITY FIRST

Battery-powered Automower® reduces CO_2 emissions significantly for increased sustainability.



WEATHER TIMER

Automatically adjusts the mowing frequency depending on the growth conditions of your lawn. For example in drought conditions mowing frequency is reduced.

X-LINE A FULLY-FEATURED RANGE OF ROBOTIC MOWERS

Husqvarna X-Line is our most fully-featured range, designed for those who want the most advanced robotic mower. These robotic mowers are equipped with the X-Line equipment package, including:

- Automower® Connect with GPS theft tracking
- GPS assisted navigation
- LED headlights
- Front rubber bumpe
- X-Line body design.







Husqvarna Automower® NERA is a new era of robotic lawn mowers without perimeter wire. Optimised for larger lawns, the range consists of Automower® 320 NERA, Automower® 430X NERA and Automower® 450X NERA.

Designed to aesthetic perfection and equipped with next-generation intelligence, Automower® NERA easily tackles the rough terrain, tight corners and slopes of your large and complex lawn with precision accuracy, giving you the perfect lawn. From its optional wire-free installation to its smart features like object avoidance, every aspect of mowing has been optimised with you in mind – enabling more time than ever for you to enjoy your garden.



Object avoidance How EPOS works without perimeter wires



Husqvarna EPOS[™] is the latest technology available for residential Automower[®] robotic lawn mowers. The satellite-based technology enables the mower to work within precise wire-free boundaries. All you need is your mobile phone and the Automower[®] Connect app to easily define the virtual boundaries. Flexible work areas and temporary stay out zones can be created giving you customisable zone control. Husqvarna's intelligent satellite technology delivers centimeter level accuracy in seconds and requires an unimpeded sky view to ensure optimal technical conditions. We offer mandatory garden checks to ensure a hassle free installation of Husqvarna EPOS[™].

Object avoidance

Intelligent object avoidance through radar technology ensures precision cutting, reducing the risk of unplanned stops. When the mower detects an object on the lawn it turns away to avoid impact. Available on 430X NERA and 450X NERA models.


LEARN MORE

Learn more about Automower® NERA and installation at Husqvarna.com/NERA

+ AUTOMOWER® GARDEN GUIDE

You can also find out which Husqvarna Automower[®] is best for you and your garden by using our interactive garden guide. Simply follow the basic steps to give us more information about your garden. It will show the Husqvarna Automower[®]model/s best suited to your needs.

Visit the Automower® Buying Guide at automower.husqvarna.com/uk/





YOUR AUTHORISED HUSQVARNA DEALER CAN ASSIST WITH ADVICE AND INSTALLATION SERVICE

Consulting your Authorised Husqvarna dealer is always a good way to secure that you get the optimal model of Husqvarna Automower® for you and your garden. To secure maximum convenience and trouble-free operation, we recommend that you also let the dealer take care of the installation in your garden.

To find your nearest dealer visit husqvarna.com/ uk/dealer-locator



PRODUCT USE GUIDE

Use this guide to help you select the best product for your needs.

							GUID/	ANCE		
AUTOMOWER® SERIES	AUTOMOWER® MODEL	X-LINE FEATURE PACKAGE	MAXIMUM WORKING AREA	AREA PER HOUR	MAXIMUM INCLINE	SEARCH SYSTEM	BOUNDARY SYSTEM	guide Wires	io io · - → AREA COMPLEXITY	
	AUTOMOWER® Aspire™ R4 NEW		400m²	45m²	25% / 22°	Singlesearch	Wire	1	•0000	
	AUTOMOWER® 105		600m²	43m²	25% / 14°	Singlesearch	Wire	1	•0000	
100 / 300 SERIES	AUTOMOWER® 305		600m²	60m²	40% / 22°	Triplesearch	Wire	1	●●○○○	
(DOMESTIC)	AUTOMOWER® 310 Mark II		1,000m²	55m²	40% / 22°	Triplesearch	Wire	1	● ●○○○	
	AUTOMOWER® 315 Mark II		1,500m²	70m²	40% / 22°	Triplesearch	Wire	1	••000	
	AUTOMOWER® 320 NERA NEW		2,200m²	90m²	50% / 25°	Quadsearch / RTK-GNSS*	Wire / Virtual*	2 / EPOS Guidance*	••000	
	AUTOMOWER® 405X	•	600m²	62.5m²	40% / 22°	Triplesearch	Wire	1	•••oo	
	AUTOMOWER® 415X	•	1,500m²	62.5m²	40% / 22°	Triplesearch	Wire	1	●●●○○	
400 SERIES (DOMESTIC / LANDOWNER)	AUTOMOWER® 430X NERA NEW	•	3,200m²	130m²	50% / 25°	Quadsearch / RTK-GNSS*	Wire / Virtual*	2 / EPOS Guidance*	••••	
	AUTOMOWER® 435X AWD	•	3,500m²	145m²	70% / 35°	Quadsearch	Wire	2	••••o	
	AUTOMOWER® 450X NERA NEW	•	5,000m²	210m²	50% / 25°	Quadsearch / RTK-GNSS*	Wire / Virtual*	2 / EPOS Guidance*	••••	
	AUTOMOWER® 520		2,200m ²	90m²	45% / 24.5°	Pentasearch	Wire	3	••••	
500 SERIES	AUTOMOWER® 535 AWD		3,500m²	145m²	70% / 35°	Pentasearch	Wire	3	••••	
(COMMERCIAL)	AUTOMOWER® 550		5,000m²	210m²	45% / 24.5°	Pentasearch	Wire	3	••••	
	AUTOMOWER® 550 EPOS		15,000m²	210m²	45% / 24.5°	RTK-GNSS	Virtual	EPOS Guidance	•••••+	

The product selector is only to be used as a guide. Please visit your local Authorised Husqvarna dealer for more information.

Capable solution but not optimal (guideline only)
 O* - Available as an accessory

	CONNEC	TIVITY & CO	ONTROL		:	SMART HOME	ECO SYSTEM		A	PPLICATION	s		
AUTOMOWER® CONNECT @ HOME	AUTOMOWER® CONNECT	FLEET SERVICE**	HIGH SECURITY COMMERCIAL INTERFACE	CLUB SOLUTION	Smartsystem	amazon alexa	IFTTT		*			PAGE	
30 METRE RANGE	UNLIMITED RANGE	UNLIMITED RANGE			GARDENA	SMART SPEAKERS	IFTTT	OPEN API	DOMESTIC	GROUND Care	SPORTS TURF		
•	•				•	•	٠	•	•			10	
									•			166	
•	O*				O*	О*	O*	O*	•			166	
•	O*				O*	О*	O*	O*	•			167	
•	O *				O*	О*	Ο*	O *	•			167	
•	•				0*	O *	О*	O *	•			167	
•	•				•	•	٠	•	•	0		168	
•	•				•	•	•	•	•	ο		168	
•	•				•	•	•	•	•	0		169	
•	•				•	•	•	•	•	ο		169	
•	•				•	٠	٠	•	•	ο		169	
•	•	•	•		•	•	•	•	0	•	•	174	
•	•	•	•		•	•	•	•	0	•	•	174	
•	•	•	•	•	•	•	•	•	0	•	•	175	
•	•	•	•		•	•	•	•	0	•	•	175	

~0



100 / 300 SERIES



The 100 Series is designed for domestic use on smaller flat lawns. Just like the larger models, the 100 series delivers excellent cutting results. 300 Series robotic mowers are ideal for small to mid-sized lawns with some complexity and slopes. Additional 300 series features include weather timer which adjusts the mowing frequency to match the grass growth rate and automatic passage handling for reliable navigation of narrow areas.

Ideal for applications including:

- Small to medium lawns
- Areas with some complexity
- Slopes up to 40% (300 series)
- Passages (300 series)
- Multiple machines per installation
- Night time mowing

AUTOMOWER® 105



Reliable robotic mower for smaller less complex lawns up to 600m². Ideal for replacing a traditional pedestrian lawnmower.

Lift & tilt sensors
 Anti-theft alarm

Working Area	Area per hour	Maximum incline	Area Complexity
600m ²	43m²	25% / 14°	• • • • •
Cutting height	Noise level	Search system	Power consumption
20 - 50mm	61dB(A)	Singlesearch (1)	20W
Model	Order PNC	RRP ex VAT	RRP inc VAT
Automower® 105	967 64 54-03		

AUTOMOWER® 305



Highly specified robotic mower for areas up to 600m², designed to handle lawns with some complexity and slopes. Ideal for replacing a smaller pedestrian lawnmower.

- Lift & tilt sensors
- Systematic passage mowing
- Automower[®] Connect @ home
 Frost sensor
 - Hose washable

Working Area	Area per hour	Maximum incline	Area Complexity
600m²	60m²	40% / 22°	$\bullet \bullet \circ \circ \circ$
Cutting height	Noise level	Search system	Power consumption
20 - 60mm	60 dB(A)	Triplesearch (3)	20W
Model	Order PNC	RRP ex VAT	RRP inc VAT
Automower® 305	967 97 40-03		

Anti-theft alarm

Weather timer

Automower[®] Connect capable

166



AUTOMOWER® 310 Mark II



Highly specified robotic mower for areas up to 1,000m², designed to handle lawns with complexity and slopes. Ideal for replacing a medium size pedestrian lawnmower.

· Lift & tilt sensors

Working Area

1,000m²

Cutting height

20 - 50mm

Model

- Systematic passage mowing
- Automower® Connect @ home

Automower® 310 Mark II 970 52 67-03

Area per hour

56m²

Noise level

60dB(A)

Order PNC

- Frost sensor
- · Balance and slope control

 Anti-theft alarm
Automower® Connect capable

- Weather timer
- · Hose washable
- · Spot cutting mode

RRP ex VAT

Maxim

Maximum incline	Area Complexity
40% / 22°	$\bullet \bullet \circ \circ \circ$
Search system	Power consumption
Triplesearch (3)	20W

RRP inc VAT



size pedestrian lawnmower.

Systematic passage mowing

Automower® Connect @ home

Lift & tilt sensors

Model

• Frost sensor

AUTOMOWER® 315 Mark II

Anti-theft alarm
Automower [®] Connect capable

• Weather timer

Highly specified robotic mower for areas up to 1,500m², designed to

handle lawns with complexity and slopes. Ideal for replacing a medium

- · Hose washable
- · Spot cutting mode

Maxii

4(

Sea

Triple

RF

mum incline	Ar	ea (Com	plexi	ity
0% / 22°	٠	٠	0	0	0
rch system	Pow	/er c	onsi	ump	tion
esearch (3)			20W	1	
RP ex VAT		RRF	o inc	VAT	

Automower® 315 Mark II 970 52 68-03



A high-performance model for lawns up to 2200m², Automower[®] 320 NERA offers a premium cutting experience, robust design and reliable operation. Precision mowing is available through wire-free installation with the Husqvarna EPOS™ Plug-in Kit and Automower® Connect access from your smartphone.

- Boundary Wire Free Installation Capable
 Husgvarna EPOS technology
- Automower[®] Accessory Port Automower[®] Connect
- Systematic Passage Mowing · Electric height adjustment
- Automower® Access
- Frost Guard
- Easy Cleaning Working Area Maximum incline Area per hour Area Complexity 2200m² 90m² 50% / 27° • • • • Cutting height Noise level Search system Power consumption 20 - 60mm 58dB(A) Quadsearch (4) 15W Model Order PNC **RRP** ex VAT RRP inc VAT Automower® 320 NERA 970 53 51-03

AUTOMOWER® ENDURANCE BLADES

Order PNC

Husqvarna Automower®Endurance blades providing more than twice the lifetime compared to our original blades thanks to the new design. The design allows for a harder and sharper edge without compromising on safety standards and provides cutting edges on all 4 sides.

Blades	Order PNC
6	595 08 44-01
45	595 08 44-02

BLUETOOTH COMMUNICATION AUTOMOWER® CONNECT@HOME

- Standard equipment on models 305, 310 Mark II and 315 Mark II
- Bluetooth communication up to 30 metres range
- Requires no mobile data contract
- Does not include GPS theft tracking
- Enables basic settings to be adjusted remotely



400 SERIES



400 Series robotic mowers offer the highest cutting capacities, the lowest noise levels and the most advanced features. They can handle small to large uneven, very complex lawns with ease. Additional 400 series features include, excellent terrain performance for uneven areas, Ultrasilent drive motors for no disturbance, up to 70% (35°) slope capabilities and electric height adjustment. All models feature added intelligence including GPS assisted navigation for efficient lawn coverage in complex areas.

Ideal for applications including:

- Small to large lawns •
- **Complex areas with obstacles**
- **Multiple areas** .
- Slopes up to 70% (35°)
- Narrow passages
- Multiple machines per installation
- Night time mowing



Advanced ultra-guiet X-Line robotic mower for areas up to 600m², designed to handle complex, sloped or multiple areas. Ideal for replacing a small to medium pedestrian lawnmower. Features GPS assisted navigation for efficient lawn coverage in complex areas.

- Lift & tilt sensors
- Systematic passage mowing
- Weather timer
- Electric height adjustment
- Frost sensor
 - Working Area Area per hour

Hose washable	
Maximum incline	Area Complex
40% / 22°	• • • •
Search system	Power consum

· Anti-theft alarm and GPS tracking

Automower® Connect

• LED Headlights

GPS assisted navigation

600m ²	62.5m ²	40% /
Cutting height	Noise level	Search
20 - 50mm	61dB(A)	Triplesea
Model	Order PNC	RRP e
Automowor® 1058	970 45 62-03	

m incline	Area	Com	plexi	ty
/ 22°	• •	٠	0	0
system	Power of	consi	ump	tion
arch (3)		25W	1	
ex VAT	RR	^o inc	VAT	

Automower® 405X 970 45 62-03



Advanced ultra-quiet X-Line robotic mower for areas up to 1,500m², designed to handle complex, sloped or multiple areas. Ideal for replacing a medium to large pedestrian lawnmower. Features GPS assisted navigation for efficient lawn coverage in complex areas.

- Lift & tilt sensors
- Systematic passage mowing
- Weather timer
- Electric height adjustment
- LED Headlights Hose washable

• Anti-theft alarm and GPS tracking

Automower® Connect

GPS assisted navigation

Frost sensor		Hose washable	
Working Area	Area per hour	Maximum incline	Area Complexity
1,500m ²	62.5m ²	40% / 22°	$\bullet \bullet \bullet \circ \circ$
Cutting height	Noise level	Search system	Power consumption
20 - 50mm	61dB(A)	Triplesearch (3)	25W
Model	Order PNC	RRP ex VAT	RRP inc VAT
Automower® 415X	970 47 17-03		

X-LINE



Advanced robotic lawn mower giving perfect results on complex lawns up to 3200m². Achieve precision mowing with virtual boundaries via the Automower[®] Connect app and Husqvarna EPOS[™] Plug-in Kit, available as an optional accessory.

Boundary Wire Free Installation Capable • Husqvarna EPOS technology

AUTOMOWER® 435X AWD

- Automower® X-Line
- Automower® Connect

Object Detection & Avoidance

X-LINE

- Automower® Zone Control
- Automower® Accessory Port • Electric height adjustment
- Easy Cleaning

Working Area	Area per hour	Maximum incline	Area Complexity
3200m ²	130m²	50% / 27°	$\bullet \bullet \bullet \bullet \circ$
Cutting height	Noise level	Search system	Power consumption
20 - 60mm	55dB(A)	Quadsearch (4)	19W
Model	Order PNC	RRP ex VAT	RRP inc VAT
Automower® 430X NERA	970 53 52-03		

A robotic lawn mower which gives you the perfect cut 24/7 on lawns up to 5000m². It navigates every corner with ease. Achieve precision mowing with virtual boundaries via the Automower®® Connect app and Husqvarna EPOS[™] Plug-in Kit, available as an optional accessory.


Eacy croaning			
Working Area	Area per hour	Maximum incline	Area Complexity
5000m ²	210m ²	50% / 27°	$\bullet \bullet \bullet \bullet \bullet$
Cutting height	Noise level	Search system	Power consumption
20 - 60mm	58dB(A)	Pentasearch (5)	26W
Model	Order PNC	RRP ex VAT	RRP inc VAT
Automower® 450X NERA	970 53 53-03		



All-wheel-drive robotic lawnmower for areas up to 3,500m². Designed to handle complex areas, tough terrain and slopes up to 70%. Features X-line design with LED headlights and intuitive interaction with Automower® Access colour display.

- Lift & tilt sensors
- Automatic passage handling
- AllWheel Drive
- Electric height adjustment
- Ultrasonic collision sensors

Working Area	Area per hour	Maximum incline	Area Complexity
3,500m ²	145m²	70% / 35°	\bullet \bullet \bullet \bullet \circ
Cutting height	Noise level	Search system	Power consumption
30 - 70mm	61dB(A)	Quadsearch (4)	40W
Model	Order PNC	RRP ex VAT	RRP inc VAT
Automower® 435X AWD	967 85 33-03		



- Automower[®] Connect
- Automower® Access
- LED Headlights

 Boundary Wire Free Installation Capable
 Husqvarna EPOS technology • Automower® X-Line Automower® Connect Automower® Accessory Port Automower® Zone Control Electric he Easy Clear

AUTOMOWER® 450X NERA

eight a aning	djustment	Object Detectio	n & Avoidance
Area	Area per hour	Maximum incline	Area Complexi
m²	210m ²	50% / 27°	• • • •

5000m²	210m²	50% / 27°	$\bullet \bullet \bullet \bullet \bullet$
Cutting height	Noise level	Search system	Power consumption
20 - 60mm	58dB(A)	Pentasearch (5)	26W
Model	Order PNC	RRP ex VAT	RRP inc VAT
Automower® 450X NERA	970 53 53-03		



Enjoy the flexibility of a boundary wire-free Automower® installation - a new alternative to perimeter cable. This kit, which includes a Husqvarna EPOS™ Plug-in and Husqvarna EPOS™ Reference Station gives you the freedom of completely customisable lawn maintenance by creating precise virtual boundaries via the Automower® Connect app.

Model	Order PNC	RRP ex VAT	RRP inc VAT
EPOS™ Plug-in Kit	970 66 34-03		

COMMERCIAL ROBOTIC MOWERS

COMMERCIA ROBOTIO MONNER

Robotic mowers are the perfect solution for efficient and sustainable management of green spaces and sports turf. With Husqvarna's new EPOS Automower[®] robotic technology, the mowing possibilities are made even more flexible as the need for boundary and guide is made obsolete. The Automower[®] 550 EPOS mower works without the need of physical wires and can be remotely programmed via Husqvarna Fleet Services[™]. And while they tirelessly spend their days producing a carpet-like finish, you can spend your time focusing on other more skilled tasks.

WHAT YOU GET. HOW WE DO IT.

HUSQVARNA FLEET SERVICES™ THE PROFESSIONAL WAY TO MANAGE YOUR ROBOTIC MOWERS


When you invest in our 500 Series robotic mowers, you get access to Husqvarna Fleet Services[™] – a digital tool allowing you to easily monitor and control them from your smart phone, tablet or laptop. Just as easy as it should be.

FILTERS THAT MAKE YOUR MOWERS MORE EFFICIENT

Different mowers can be "tagged" to different teams, or to different locations, and then grouped for easier handling. The different user roles can also be tagged with different levels of control.

ALWAYS KEEP TRACK OF THEIR EXACT LOCATIONS

Want an overview of all your robotic mowers? Just check the map view. Thanks to the built-in GPS, you always know the exact location and status of every robotic mower. Use tags to issue commands to all mowers in specific areas for even easier fleet handling.

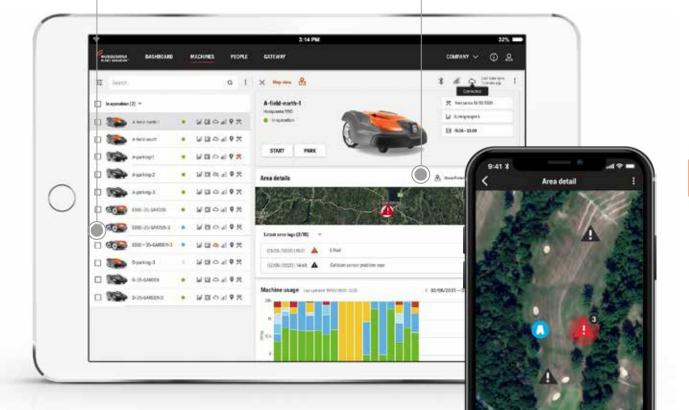

FULL CONTROL AND SCHEDULING FROM ANYWHERE

Forget manual controls. With Husqvarna Fleet Services[™], you – and only you – conveniently control your robotic mowers from anywhere. Perfect when you want to adjust the mowing schedule or cutting height, or park them before the storm arrives. And thanks to tagging, you can exert exact control over all your mowers, grouping them and issuing batch commands, directly from your smartphone app.

+ ALL YOUR EQUIPMENT IN ONE PLACE

If you want to, you can also connect the rest of your equipment to the system by using Husqvarna Fleet Services[™] sensors. Learn more at www.husqvarna.com/uk/services/fleet-services

OPERATIONAL INSIGHTS

Should anything happen, such as an unexpected standstill for one mower, you'll immediately receive a notification to your phone. Information about where problems occur and how often give you valuable insights to continuously adjust and improve the installation, which ensure a smooth and efficient operation. Through the Automower® Machine usage tab, you can review daily user data for more insights. The information is summarised in an easy and accessible way, helping you make your fleet usage more efficient and productive.

Outside working are

12:22 14/12/018

個

×

t



AUTOMOWER® EPOS HOW IT WORKS

Automower[®] EPOS is a satellite powered guidance technology for robotic mowing. Satellite signals are received by both the mower and the reference station. To achieve an accuracy of 2-3cm Real-Time Kinematic Global Navigation Satellite System (RTK-GNSS) is used. A fixed EPOS reference station is required to broadcast precision correction data to the mower. EPOS requires an unimpeded view of the satellites for signal data to be received and correction data to be sent. Tall buildings and dense trees close to or within the installation can block satellite data.





AUTOMOWER® EPOS VIRTUAL BOUNDARIES

Automower[®] EPOS does not require boundary or guide wires to define the working area. The boundary wire is replaced by a virtual boundary. The use of transport parts allows easy movement between designated work areas even on paved surfaces. The mower maintains work areas using a random cutting pattern, GPS ensures even area coverage. Virtual boundaries allow for trouble-free ground maintenance such as aeration.





AUTOMOWER® EPOS PRECISE AREA MANAGEMENT

Automower® EPOS allows precision management of multiple work areas using individual area settings. Work areas can be assigned their own specific mowing schedule as well as cutting height. Temporary stay-out zones can easily be activated and de-activated depending upon the situation. Transport paths are used to move the robotic mower between work areas as well as to and from the charge station. This allows for much more flexible placement of the charging station.

Learn more at www.husqvarna.com/uk

AUTOMOWER® CLUB SOLUTION IDEAL SOLUTIONS FOR SPORTS FIELDS

Automower[®] club solution allows for optimum cutting of sports pitches including football and rugby. It has been designed to work with Automower® 550, enabling one single installation for an entire pitch. This means that up to three mowers can run simultaneously in the same area allowing routine maintenance such as aeration and turf repairs to be carried out without the risk of damaging the boundary wire.

Learn more at www.husqvarna.com/uk





COMMERCIAL INTERFACE HIGH SECURITY PROTECTION

The Automower® 500 series all feature a commercial human machine interface (HMI) specially adapted for use in public settings. The professional HMI, which features a START / STOP switch and LED status indicator protects against unauthorised tampering of the machine and its settings. If the robotic mower gets stolen, it's immediately locked, an alarm goes off and the built-in GPS tracking shows the mower's exact position. All the machines settings and controls are managed remotely through the Husqvarna Fleet Services[™] smartphone app or via a PC or tablet.

Parks and green spaces is an important element of Edinburgh. If we can free up what limited resources we have to look after the borders and plants, it's a winner for everybody because the borders are clean and the grass is still getting cut. It keeps it to a standard that we couldn't keep before".

Edinburgh City Council





COMMERCIAL ROBOTIC MOWERS

500 SERIES – COMMERCIAL USE



Husqvarna robotic mowers specifically developed for commercial applications. Offering the most efficient and sustainable way to consistently maintain areas of green space. Ideal for professionals and private or public enterprises who seek new ways to maintain grassed areas whilst enabling the redeployment of resources onto more important tasks. The 500 Series robotic mowers all come with Husqvarna Fleet Services[™] built-in, enabling fleet management and mower control from anywhere.

Ideal for applications including:

- **Grounds maintenance**
- Sports facilities
- **Commercial properties**
- **Holiday parks**
- Noise sensitive areas
- Slopes up to 70% (35°)
- Multiple machines per installation
- **Complex areas with obstacles**
- Night time mowing



Professional robotic mower with robust design and high cutting capacity. Equipped with commercial interface for simplified and robust interaction. Remote mower management and surveillance through Husqvarna Fleet Services[™].

- Husqvarna Fleet Services[™]
- Automower[®] Connect fitted
- Commercial interface
- Automatic passage handling
- GPS assisted navigation

Working Area	Area per hour
2,200m ²	90m²
Cutting height	Noise level
20 - 60mm	59dB(A)
Model	Order PNC
Automower® 520	970 65 63-03

1	Anti-theft	alarm	and	GPS	tracking	
---	------------	-------	-----	-----	----------	--

- Electric height adjustment
- Lift & tilt sensors
- Weather timer
- UPDATED 5 blade cutting disc

Area per hour	Maximum incline	Area Complexity
90m²	45% / 24.5°	
Noise level	Search system	Power consumption
59dB(A)	Pentasearch (5)	30W
Order PNC	RRP ex VAT	RRP inc VAT
970 65 63-03		



Professional AWD robotic mower with high cutting capacity and 70% slope performance. Equipped with commercial interface for simplified and robust interaction. Remote mower management and surveillance through Husqvarna Fleet Services™.

· Anti-theft alarm and GPS tracking

• Electric height adjustment

Lift & tilt sensors

• All wheel drive

- Husqvarna Fleet Services[™]
- Automower[®] Connect fitted
- Commercial interface
- Automatic passage handling
- UPDATED 5 blade cutting disc
- UPDATED LED safety headlights Working Area Area per hour Maximum incline Area Complexity 3.500m² 145m² 70% / 35° Cutting height Noise level Search system Power consumption 30 - 70mm 62dB(A) Pentasearch (5) 40W Order PNC RRP ex VAT RRP inc VAT Model Automower® 535 AWD 970 65 17-03

COMMERCIAL ROBOTIC MOWERS

EPOS



Professional robotic mower with a high cutting speed and large area capacity. Equipped with commercial interface for simplified and robust interaction. Remote control and surveillance through Husqvarna Fleet Services[™].

- Husqvarna Fleet Services[™]
- Anti-theft alarm and GPS trackingElectric height adjustment
- Automower® Connect fitted
- Commercial interface
- Automatic passage handling
- GPS assisted navigation
- Weather timer

Lift & tilt sensors

UPDATED 5 blade cutting disc

Working Area	Area per hour	Maximum incline	Area Complexity
5,000m ²	210m ²	45% / 24.5°	
Cutting height	Noise level	Search system	Power consumption
20 - 60mm	61dB(A)	Pentasearch (5)	35W
Model	Order PNC	RRP ex VAT	RRP inc VAT
Automower® 550	970 65 65-03		



Professional robotic mower featuring Husqvarna EPOS guidance with precision area management and transport paths. With virtual boundaries you can define several work areas with different settings as well as set temporary stay-out zones. Requires EPOS reference station

- Husqvarna EPOS Technology
- Virtual boundary
- Transport paths
- Lift & tilt sensors
- UPDATED 5 blade cutting disc
- Electric height adjustment
 Weather timer

• RTK-GNSS Guidance

• Precise area management

• UPDATED systematic cutting pattern

		0	,	01
	Working Area	Area per hour	Maximum incline	Area Complexity
	up to 15,000m ²	210m ²	45% / 24.5°	$\bullet \bullet \bullet \bullet \bullet \bullet +$
	Cutting height	Noise level	Search system	Power consumption
	20 - 60mm	61dB(A)	EPOS Guidance	35W
	Model	Order PNC	RRP ex VAT	RRP inc VAT
1	Automower® 550 EPOS	970 65 67-03		





Transmits RTK-GNSS signals between the Automower® 550 EPOS mower and guidance satellites. The mains powered reference station is required for EPOS to function and can serve multiple EPOS units per installation. Work area up to 500 metre radius.

Model	Order PNC	RRP ex VAT	RRP inc VAT
EPOS Reference Station	970 46 82-03		

HUSQVARNA FLEET SERVICES™

The digital tool allows you to easily monitor and control your robotic mower fleet from your smart phone, tablet or laptop. Just as easy as it should be. Find out more on page 284.

LET OUR EXPERTS TAKE CARE OF YOU

Dealer Installation Service

Husqvarna recommend for maximum convenience and to ensure correct installation and trouble-free operation that your local Authorised Husqvarna dealer carries out the product installation. For more information and to locate your nearest dealer please visit:



www.husqvarna.com/uk/dealer-locator

AUTOMOWER® FAIRWAY KIT

Reduces the minimum cutting height allowing a minimum grass length of approximately 10mm to be achieved. Lower range includes 10mm, 12,5mm, 15mm and 17.5mm steps. Excludes Automower® 535 AWD.






A SMARTER LAWN CARE EXPERIENCE

STAY IN CONTROL WITH YOUR SMARTPHONE

The Husqvarna Automower[®] Connect service allows you to take full control of your Husqvarna robotic lawn mower. The service provides two modes of connectivity, depending on model: Automower[®] Connect for long-range connectivity using cellular communication, or Automower[®] Connect@Home for short-range, using Bluetooth[®] wireless technology. You can see where the mower is operating and control the schedules conveniently from wherever you are.

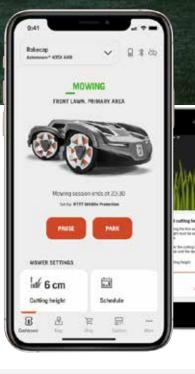

BLUETOOTH COMMUNICATION AUTOMOWER[®] CONNECT@HOME

- Standard equipment on 300, 400 & 500 seriesBluetooth communication up to 30 metres range
- Requires no mobile data contract

UPGRADE TO AUTOMOWER® CONNECT 10 YEARS OF FREE CONNECTIVITY INCLUDED!

The Automower[®] connect module allows you to control and configure your mower. With the module installed, you can download the app to your Android or iPhone and use it to communicate directly with your mower.

Item	Order PNC
305/310 Mark II /315 Mark II /320 NERA	586 66 23-09

*Automower® Connect covers service during product life (10 years). The Automower® Connect service requires 2G/3G data transfer, technology provided by country-specific telecom operators (3rd party). Husqvarna's service includes product's function, not communication due to data transfer restrictions.

MOBILE DATA COMMUNICATION AUTOMOWER® CONNECT

*

- Standard equipment on X-Line models and 500-series
- Available as an accessory on models 305, 310 Mark II and 315 Mark II
- Mobile data communication worldwide*
- 10 years mobile data contract included*
- Geofence with GPS theft tracking

CONTROL Receive status messages and send Start, Stop and Park commands to the mower from anywhere in the world.

CONFIGURE Brings the mower's menu system to your smartphone. Read and change the mower settings without the need of being on site.

SECURITY Receive alarm and track your mower's position in case of theft.





AVAILABLE ON GOOGLE PLAY AND ON THE APP STORE



LEVEL UP YOUR GARDEN

Innovative technology, smart integrations, and partnerships helps us provide intuitive solutions that simplify your life. Intelligent features adapt to your personal needs and make the experience more engaging and supportive. Among our solutions you find voice control through Amazon Alexa or Google Home. Smart connections to sprinklers, personal calendars or local weather through IFTTT and Al driven support give you a smooth experience and great result with Husqvarna Automower[®].





TIME TO START MOWING JUST ASK YOUR SMART SPEAKER

All Automower® Connect equipped robotic mowers are compatible with Amazon Alexa and Google Home. This means that all you need is to give your smart speaker a voice command, and your Automower® robotic mower will jump to the task. The smart speakers recognise the most common commands such as start, stop, park, and get status updates by simply asking Alexa. Garden care made as easy as it should be.



EXPLORE IFTTT MAKE YOUR AUTOMOWER[®] EVEN SMARTER

IFTTT (If This Then That) is a free, easy-to-use web-based service. It allows you to create your own applets and integrate Husqvarna Automower[®] even more into your smart home systems. For instance, you can set it so Husqvarna Automower[®] starts mowing when the home alarm is turned on. Or that it should park when the current temperature drops below a certain point – and much, much more. The limits are set by your imagination. **Please visit www.husqvarna.com/uk for further information.**



CONTROL YOUR SPRINKLER AND MOWING DIRECTLY FROM YOUR SMARTPHONE

Now you can have an even more intelligent relationship with your garden. By connecting your Husqvarna Automower® to the high-performing GARDENA irrigation smart system, you can easily sync your mower and your irrigation schedule. Sit back and relax while Automower® robotic mower keeps your lawn perfectly cut and healthy. The GARDENA smart system – with its sensors that measure soil moisture, outside temperature and light intensity, and then waters accordingly – will keep your lawn green and fresh. This works with all products equipped with Automower® Connect.



OPEN API GIVING ENDLESS POSSIBILITIES

Our open API solution enables endless connectivity possibilities of personalisation and add-on features through IFTTT (If This Then That).



INSTALLATION AND PRODUCT ACCESSORIES



AUTOMOWER® INSTALLATION KITS

SMALL - Suitable for open lawn areas of max 800m² or complex lawn areas of max 400m²

MEDIUM - Suitable for open lawn areas of max 2,000m² or complex lawn areas of max 1,000m²

LARGE - Suitable for open lawn areas of max 5,000m² or complex lawn areas of max 2,500m²



 Item
 Order PNC

 Small
 967 97 21-01

 Medium
 967 97 22-01

 Large
 967 97 23-01

BOUNDARY WIRE PRO

High performance 5.5mm diameter boundary wire. The wire features double insulation to deal with the toughest of installations whilst helping to protect against rodents. The outer layer has high UV resistance increasing durability. Length 300m.



Item Wire PRO, 300m (Ø5.5mm)

Order PNC 593 29 77-02

CONNECTORS AND FASTENERS

ltem		Order PNC
	Connector, 1pc	529 28 08-01
	Connector, 5pc	577 86 48-01
	Coupler, 1pc	501 98 02-01
-	Coupler, 5pc	577 86 47-01
	Coupler, 100pc	501 98 02-03
	Peg, 100pc	577 86 42-01

PROTECTION BOXES

Protection box is a small sealed box for cable connectors, to protect them against moisture during off season.

Outdoor power box is a sealed box to protect an outdoor mounted transformer.



Item	
otection Box	

Order PNC 599 80 17-01

BOUNDARY WIRE

Standard 2.7mm wire used to define the working area, suitable for most installations. Heavy duty 3.4mm wire is a robust wire for demanding installations, 100% copper core and isolated surface to minimise signal loss. All variants feature a black outer layer with high UV resistance.

> Item Wire, 50m (Ø2.7mm) Wire, 150m (Ø2.7mm) Wire, 250m (Ø2.7mm) Wire, 800m (Ø2.7mm) Wire Heavy duty, 500m (Ø3.4mm)



 Order PNC

 597 23 78-02

 597 23 78-01

 580 66 20-06

 580 66 20-09

 522 91 41-02

HYBRID GRASS

Pr

Hybrid grass provides grip in narrow and steep areas. Reduces lawn wear on slopes or narrow passages. 1m² hybrid grass including 16 green pegs



Item Hybrid Grass **Order PNC** 598 89 60-01

ROBOTIC MOWER ACCESSORIES

TEMPORARY FENCE

Robust steel arches for temporarily fencing off areas of the lawn. Ideal for protecting spring flowers. 12 arches providing 1m² coverage.

Item

Temporary Fence



Order PNC 597 98 70-01

AREA SWITCH

Automower® Area Switch is an accessory that is used to shortcut the boundary wire, effectively creating zones that can easily be switched on or off.



Order PNC

529 45 97-01

Area Switch

AUTOMOWER® BLADES

Item

Husqvarna Automower® carbon steel safety blade. Combines high-strength properties and sharpness for a long lifetime.



Item Blades - 9 pack Blades - 45 pack

Order PNC 577 86 46-03 577 60 65-05 **BOUNDARY REPAIR KIT**

Designed to replace a damaged section of boundary wire. Kit includes 5 metres of boundary wire, (Ø2.7mm) 10 pegs, and 6 connectors.



Item Boundary Repair Kit

Order PNC 597 53 95-01

FLEXFENCE KIT

This battery-powered boundary wire lets you effortlessly create a temporary stay-out zone on your lawn.

Item

Flexfence Kit



Order PNC 529 88 05-01

AUTOMOWER® ENDURANCE BLADES

Husqvarna Automower® Endurance blades providing more than twice the lifetime compared to our original blades thanks to the unique design. New HSS Blades provide increased durability with High speed steel construction, ideal for commercial applications.

> Item Endurance - 6 pack Endurance - 45 pack Endurance HSS - 6 pack Endurance HSS - 45 pack

MAINTENANCE & CLEANING KIT

Including specific slim brushes with sharp scrapers to get in tight areas, a screwdriver to exchange blades, abrasive pad to clean the electric contacts on the mower and charging station and a plastic care spray.

Item

Maintenance Kit

Care and Shine Spray 200ml



Order PNC

595 08 44-01

595 08 44-02

599 80 52-01

599 80 52-02

Order PNC 590 85 51-01 593 96 79-01

FAIRWAY KIT

Lowers the minimum cutting height to 10mm. Makes it possible to mow the fairways of golf courses, and similar sports turf. Excludes AWD models.

> Item 400 / 500 series (>2020) 400 / 500 series (2020>)



Order PNC 597 49 63-01 597 49 63-02

HOUSING

Protects the charging station and your Husqvarna Automower® from exposure to sun and rain.



Order PNC

536 66 18-01

587 23 61-01

585 01 94-01

597 63 53-01

536 66 41-01

Item Aspire[™] R4 House 300 Series / 405X / 415X 400 / 500 Series 400 / 500 Series AWD NERA Series

WALL HANGER

Store your Husqvarna Automower® on the wall when not in use and during the winter season.



305 / 310 Mark II / 315 Mark II / 405X / 415X Wall Hanger 310 / 315 Wall Hanger 400 / 500 Series Wall Hanger NERA Series Wall Hanger

Item

🕝 Instagram: HusqvarnaUK



ROUGH TERRAIN KIT



Provides excellent traction on rough and sloping lawns with slope performance increasing by 5%. Contains course threaded wheels and wheel brushes.

ltem	Order PNC
305 / 310 Mark II / 315 Mark II / 405X / 415X Kit	597 70 54-01
310 / 315 Kit	587 23 53-01
400 / 500 Series Kit	581 88 97-02
NERA Series Kit	536 84 92-01

WHEEL BRUSH KIT



Keeps the driving wheels clean to maintain good traction. Separate replacement refill brushes available.

Item	Order PNC
305 / 310 Mark II / 315 Mark II / 405X / 415X Kit	597 70 46-01
310 / 315 Kit	587 23 57-01
400 / 500 Series Kit	581 90 31-02
NERA Series Kit	505 13 28-03





5 standard designs are available as a fixed range for the following Husqvarna Automower[®] models. Skins are available to order as single items from your dealer. A full range of bespoke and personalised skins are available to order direct through myHusqvarna.com.

		8	St. MA	area a
Automower [®] model	Ladybug	Flower Bed	Zebra	Camo
105	599 29 24-01	-	-	-
305 / 310 Mark II / 315 Mark II	599 29 24-02	599 29 47-01	599 29 49-01	599 29 50-01
310 / 315	599 29 24-03	599 29 47-02	599 29 49-02	599 29 50-02
315X	599 29 24-04	599 29 47-03	599 29 49-03	599 29 50-03
420	599 29 24-05	599 29 47-04	599 29 49-04	599 29 50-04
430X	599 29 24-06	599 29 47-05	599 29 49-05	599 29 50-05

REPLACEABLE TOP COVERS



Make your mower unique and personal by changing its colour. Available in white, orange and grey on selected models.

Item	Order PNC
105 - Body Kit White	580 96 54-02
305 / 310 Mark II / 315 Mark II - White	597 70 31-01
305 / 310 Mark II / 315 Mark II - Orange	597 70 31-02
310/315 - White	587 23 58-02
310/315 - Orange	587 23 58-03
405 / 415X- White	529 46 13-01
405 / 415X - Orange	529 46 13-02

Item	Order PNC
430X (2018 >) - Grey	590 87 70-01
430X (2018 >) - White	590 87 70-02
430X (2018 >) - Orange	590 87 70-03
435X AWD - Grey	596 30 00-01
435X AWD - White	596 30 00-02
435X AWD - Orange	596 30 00-03
450X - Grey	588 79 91-01
450X - White	588 79 91-02
450X - Orange	588 79 91-03
520 - Grey	591 49 60-01
520 - Orange	591 49 60-02
550 - Grey	591 49 61-01
550 - Orange	591 49 61-02
535 AWD - Grey	596 30 02-01
535 AWD - Orange	596 30 02-02

Ø

AUTOMOWER® ACCESSORIES GUIDE

Use this chart below to select the right accessories for your Husqvarna Automower®.

Husqvarna Automower® Accessory	PNC	105	305 / 310 II / 315 II	310 / 315	320 NERA	405 / 415X	430X	430X NERA	435X AWD	450X	450X NERA	520	535 AWD	550	550 EPOS
Automower® Connect Module	586 66 23-09	-	•	•	•	S	s	s	s	S	S	S	S	S	S
Automower® Connect @ Home	N/A	-	S	S	S	S	S	S	S	S	S	S	S	S	S
Replaceable Body Kit	580 96 54-02	•		_	-	-	_	_	_	_	-	_	-	_	-
Replaceable Top Cover	597 70 31-XX	-	•	_	-	-	_	-	-	_	_	_	-	_	-
Replaceable Top Cover	587 23 58-XX	-	-	•	-	-	_	_	_	_	-	_	-	-	-
Replaceable Top Cover	529 46 13-XX	_		_	-	•	_	_	_	_	_	_	-	_	-
Replaceable Top Cover (2018>)	590 87 70-XX	_	-	_	_	_	•	_	_	_	-	_	-	_	-
Replaceable Top Cover	596 30 00-XX	_		_	-	-	_	_	•		-	_	-	_	-
Replaceable Top Cover	588 79 91-XX	_	_	_	-	-	_	_	_	•	_	_	-	_	-
Replaceable Top Cover	591 49 60-XX	_	_	_	-	-	_	_	-	_	_	•	-	_	-
Replaceable Top Cover	591 49 61-XX	_	-	_	-	-	_	_	_	_	_	_	-	•	-
Replaceable Top Cover	596 30 02-XX	_	-	-	-	-	-	_	-	_	-	_	•	-	-
Housing	587 23 61-01	-	•	•	-	•	-	-	-	-	-	-	-	-	-
Housing	585 01 94-01	-	0	0	-	0	•	_	-	•	-	•	-	•	-
Housing	597 63 53-01	-	-	-	-	-	-	-	•	-	-	-	•	-	-
Housing	536 66 41-01	-	-	-	•	-	-	•	-	-	•	-	-	-	-
Bag	522 91 67-01	•	•	•	•	•	0	0	_	0	0	0	-	0	-
Wall Hanger	597 70 36-01	-	•	-	-	•	-	-	-	_	-	_	-	-	-
Wall Hanger	587 22 40-01	_	-	•	-	-	_	_	-	_	-	_	-	_	-
Wall Hanger	585 01 97-02	_	-	_	-	-	•	_	_	•	_	•	-	•	•
Wall Hanger	536 84 93-01	-	-	-	•	-	-	•	-	-	•	-	-	-	-
Fairway Kit (>2020)	597 49 63-01	-	-	-	-	-	•	-	-	•	-	•	-	•	-
Fairway Kit (2020>)	597 49 63-02	-	-	-	-	-	•	_	-	•	-	•	-	•	•
Rough Terrain Kit	597 70 54-01	-	•	-	-	•	-	-	-	-	-	-	-	-	-
Rough Terrain Kit	587 23 53-01	-	-	•	-	-	-	-	-	-	-	-	-	-	-
Rough Terrain Kit	581 88 97-02	-	-	-	-	-	•	-	-	•	-	S	-	S	S
Rough Terrain Kit	536 84 92-01	-	-	-	•	-	_	•	-	_	•	-	-	-	-
Wheel Brush Kit	597 70 46-01	-	•	-	-	•	_	-	-	_	-	-	_	-	-
Wheel Brush Kit	587 23 57-01	-	-	•	-	-	_	-	-	_	-	-	-	-	-
Wheel Brush Kit	581 90 31-02	-	-	-	-	-	•	-	-	•	-	S	-	S	S
Wheel Brush Kit	505 13 28-03	-	-	_	-	-	_	_	•	_	_	_	•	_	-
Wheel Brush Kit	505 13 28-03	-		_	•	-	_	•	-		•	_	-	_	-
Wheel Brush Refill	505 13 28-03	-	•	•	-	•	-	-	-	_	-	-	-	-	-
Wheel Brush Refill	581 98 20-02	-	-	_	-	-	•	_	-	•	_	•	-	•	•
Automower® Blades	577 86 46-XX	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Endurance Blades	595 08 44-XX	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Endurance HSS Blades	599 80 52-XX	٠	•	•	•	•	•	•	•	•	•	•	•	•	•
Replacement Battery	586 57 62-01	•	_	-	-	-	_	-	-	_	-	_	-	-	-
Replacement Battery	584 85 28-01	_	-	•	-	•	_	_	_	_	-	_	-	-	-
Replacement Battery	580 68 33-01	_	-	_	-	-	-	_	-	-	-	•	-	-	-
Replacement Battery	589 58 57-01	_	-	-	-	-	•	_	_	_	_	_	-	_	-
Replacement Battery	588 14 64-01	-	-	-	-	-	_	_	-	•	-	_	-	•	-
Replacement Battery	593 24 71-01	-	-	_	-	-	-	-	•	-	-	-	•	-	-

• Designed to fit - Does not fit • Fits but not optimal **S** Comes as standard





THE FUTURE OF COMMERCIAL TURF CARE.

With its huge area capacity, CEORA™ is great news for all turf care professionals. Systematic cutting and virtual boundaries deliver superb results and easier turf management on larger surfaces than ever. What's more, this low noise, emission-free* solution offers thrilling future potential. It's time to expand your horizons and embrace the future.



COVERING MORE TURF THAN EVER Up to 75,000m²



FLEXIBLE AND HASSLE FREE ZONE MANAGEMENT EPOS[™] technology eliminates the need for boundary wires for the ultimate flexibility.



SYSTEMATIC MOWING FOR A WINNING RESULT

Choose your cutting patterns, heights and times to achieve your perfect result.



CONTROL AT YOUR FINGERTIPS

Complete operational control and surveillance from your smart phone, with Fleet Services™.



Modular system with two drive units


The new CEORA™ robotic mower is a modular system where you select the combination that suits your operation best. An innovative split design features a drive unit and a front unit. The 546 drive unit delivers the highest cutting performance with a total capacity of up to 75,000m². The 544 drive unit can cut up to 60,000m².



Features 15 high-speed steel blades, mounted



Charging station CS4 A battery charging station is required to nower CFORA™. The charging station comes equipped with a transforme



UP TO 50,000 M² PRO OLIALITY

with CEORA™.

WORKING AREA CAPACITY

UP TO 25,000 M² PRO SPORTS OUALITY

For sports turf and golf courses at medium ambition level, or other facilities with high demands on turf quality. Medium turf height and normal dense quality of turf. CEORA™ to mow the area every second day.

Everyday care of premium sports turf or golf courses at low cutting height. A well managed, lush and dense turf can be optimally mowed

UP TO 75.000 M² **REGULAR OUALITY**

For turf with lower demands and slower levels of growth. Higher cutting height and normal to low dense quality of turf. CEORA™ to mow the area twice per week

Razor 43M / 43L



Active wheel brushes

Available as an accessory, these work constantly to reduce grass from collecting on the wheels. Helping to create optimal turf. without any grass clumps.





ROBOTIC DRIVE UNIT CEORA[™] 546 EPOS[™]

Imp to 75,000m²
 20%
 38kg

Peak-performance robotic model for large-area mowing, featuring Husqvarna EPOS[™] technology. Systematic, high-precision cutting tailored for optimised flexibility within virtual boundaries. Handles very large areas such as multiple football fields, golf courses or large hotel, company or municipal facilities. Delivering a professional result on the turf, operating quietly and with zero emissions while in use.

- EPOS[™] navigation with virtual boundaries
- Object avoidance
- IPX5 protected hose washable
 Husquarna Elect Services
- FOTA firmware over the air
- Systematic mowing of large areas

• LIUSYVALLIA FIEEL SELVICES
• Future proof with multi-carrier
possibilities

Order PNC 970 46 79-01

RRP ex VAT	RRP inc VAT



🔣 up to 60,000m²

ROBOTIC DRIVE UNIT

CEORA[™] 544 EPOS[™]

- 20%
- 🛆 38kg

High-performance robotic model for large-area mowing, featuring Husqvarna EPOS[™] technology. Systematic, high-precision cutting tailored for optimised flexibility within virtual boundaries. Delivering highly professional results for sports fields or larger facility areas, operating quietly and with zero emissions while in use.

RRP ex VAT

- EPOS[™] navigation with virtual boundaries
- FOTA firmware over the air
- Systematic mowing of large areas
- Object avoidance
- IPX5 protected hose washable

RRP inc VAT

NEW

- Husqvarna Fleet Services
- Future proof with multi-carrier possibilities

Order PNC 970 54 90-01

CUTTING DECK

RAZOR 43L

CUTTING DECK






The tailor-made CEORA[™] cutting deck, Razor 43M, features a cutting system with three blade discs. A total of 15 high-speed steel razor blades keep the turf at an excellent quality level. Easy maintenance and handling is possible by an ergonomic and unique service position, meaning the cutting deck can quickly be tilted for easy access to exchange blade discs or for hose washable cleaning (IPX5 classified).

	68cm
1	10-60mm
Â	35kg

Featuring the same design as the Razor 43M, the Razor 43L cutting deck is designed with professional golf course or sports turf customers in mind, or anyone who requires a lower cut, with a cutting height of 10-60mm.

Order PNC	RRP ex VAT	RRP inc VAT	Order PNC	RRP ex VAT	RRP inc VAT
970 46 80-01			970 61 44-01		

🔣 Working area capacity m²(Pro quality) 🖄 Maximum slope capacity, inside, % 漰 Cutting width, cm 🕌 Cutting height, min-max, mm 📋 Weight, kg



EPOS[™] REFERENCE STATION



Handles the RTK-GNSS signals between the products and the satellites. Handles several EPOS[™] machines per installation. Work area up to 500-meter radius.

Order PNC	RRP ex VAT	RRP inc VAT
970 46 82-03		

ATTACHMENT KIT

EPOS[™]

Bracket for EPOS[™] reference station. 32mm diameter, 300mm length & 250mm height. Steel .

Order PNC	RRP ex VAT	RRP inc VAT
534 97 19-01		

ACTIVE WHEEL BRUSH KIT



An active wheel brush kit is available to help keep grass away from the wheels of CEORA[™]. This also improves traction and lowers the need for maintenance.

Order PNC	RRP ex VAT	RRP inc VAT
529 31 89-01		

CHARGING STATION CS4

CHARGING STATION PLATE

ENHANCE HSS BLADES



Recharges CEORA[™] automatically and efficiently according to a programmed schedule. Full charging time 3-4 hours from empty. Soft ground plates are available as an accessory.

Order PNC	RRP ex VAT	RRP inc VAT
970 46 81-03		



The charging station plate can be used to create a stable surface when installing / placing a charging station on soft surfaces like grass.

Order PNC	RRP ex VAT	RRP inc VAT
535 42 31-01		



High speed steel blades with softer core and hardened edges for sharpness and robustness.

 Order PNC
 RRP ex VAT
 RRP inc VAT

 599 80 53-01 (45 pcs)
 599 80 53-02 (300 pcs)
 599 80 53-02 (300 pcs)



TECHNICAL SPECIFICATIONS

	CEORA™ 546 EPOS™ / Razor 43M + CS4	CEORA™ 544 EPOS™ / Razor 43M + CS4
	Razor 4510 + 654	Razoi 43M + 634
CAPACITY*		
Working area capacity, m ² , Pro sports quality	25.000	20,000
Working area capacity, m ² , Pro quality	50,000	40,000
Working area capacity, m ² , Regular quality	75.000	60,000
Area capacity per hour, m ² (excluding charging)	1,850	1,400
Maximum slope capacity, inside / by edge, %	20/15	20 / 15
CUTTING SYSTEM		
Cutting width, cm	68	68
Cutting height, min-max, mm	20-70 (10-60 with Razor 43L)	20-70 (10-60 with Razor 43L)
Height adjustment	Electric	Electric
Cutting system	3 blade discs, with 5 pivoting razor blades per disc	3 blade discs, with 5 pivoting razor blades per disc
Extra blades, pcs	45	45
NAVIGATION		
Boundary type	Virtual	Virtual
Navigation system	Systematic	Systematic
Automatic passage handling	Yes	Yes
Search system	EPOS™ Guidance	EPOS™ Guidance
PRODUCT DATA		
Sound level percieved, dB(A)**	N/A	N/A
Length x width x height, cm	124 x 108 x 44	124 x 108 x 44
Weight, kg	68	68
Speed, cm/s	100	75
Protection index (IP code)	IPX5 (Charging station IPX3)	IPX5 (Charging station IPX3)
Mean energy consumption at maximum use (kWh per month)	N/A	N/A
Power consumption during cutting, W	270	270
Battery type	Li-ion	Li-ion
Battery capacity, Ah	49	49
Battery voltage, V	36	36
Charging system	Automatic	Automatic
Charging current, A	120	120
Mains cable, m	3	3
CONTROL	5	5
Husqvarna Fleet Services™	•	•
Automower® Connect	•	•
Husqvarna EPOS™ Technology	•	•
Pro user interface/app	•	•
Precise area management	•	•
FOTA – firmware over the air	•	•
SAFETY AND SECURITY	•	•
Object detection	•	•
Object avoidance	•	•
Frost sensor	•	•
Safety lights	•	•
GPS theft tracking	•	•
Anti-theft alarm	•	•
PIN code lock	•	•
Lift sensor	•	•
Collision sensor		
Tilt sensor	•	•
ACCESSORIES	•	•
Reference Station		
Active wheel brushes	(\bullet)	(•)

(●) = Accessory

*Working area capacity is variable due to grass type, soil, cutting height, lawn complexity and slope. **Sound level perceived is measured according to ISO11094:1991. N/A= Values were not available at time of printing.



ROBOTIC MOWERS

TECHNICAL SPECIFICATIONS

	AUTOMOWER® 105	AUTOMOWER® 305	AUTOMOWER® 310 II	AUTOMOWER® 315 II	AUTOMOWER® 320 NERA
TECHNICAL SPECIFICATIONS					
Working area capacity, m ² (+/- 20%)	600	600	1000	1500	2200
Area capacity per hour, m ²	43	55	60	65	90
Maximum daily operating time, h	13	10	16	24	24
Maximum slope capacity, inside / by edge, %	25/15	40/15	40/15	40/15	50/25
Charging current, A	1.3	1.3	1.3A	1.3	2.2
Navigation system and starting points	Irregular /2	Irregular/3	Irregular/3	Irregular/3	Irregular / 5
Number of guides, pcs	1	1	1	1	2
Charging system	Automatic	Automatic	Automatic	Automatic	Automatic
Search system	Singlesearch	Triplesearch	Triplesearch	Triplesearch	Quadsearch / EPOS Guidance
Brushless drive motor type	DC	DC	DC	DC	DC UltraQuiet
Brushless blade motor type	DC	DC	DC	DC	DC
Battery type	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion
Battery capacity, Ah	2.1	2.1	2.1	2.1	5
Battery voltage, V	18	18	18	18	18
Power consumption during cutting, W	20	20	25	20	15
Cutting width, cm	17	22	22	22	24
Cutting height, min-max, mm	20-50	20-60	20-50	20-50	20-60
Sound level, dB(A) (measured / guaranteed)*	58/61	58/60	58/60	58/60	58/58
Extra blades, pcs	9	3	6	6	6
Weight, kg	6.9	9.4	9.4	9.4	12.8
FEATURES					
All-Wheel Drive	-	-	_	_	-
Anti-theft alarm	•	•	•	•	•
Automatic passage handling	-	•	•	•	•
Automower® Connect@HOME	-	•	•	•	•
Automower® Access	—	-	_	_	•
Husqvarna Fleet Services™	_	-	_	_	-
Backlit communication display	•	•	•	•	•
Backlit keypad	-	-	-	—	•
Easy clean - hose washable	_	•	•	•	•
Electric height adjustment					•
Frost sensor	_	•	•	•	•
FOTA – software update automatically GPS theft tracking	_	(•)			-
Husqvarna EPOS Technology	_	(•) _	(●) _	(●) 	
EPOS Reference Station	_		_	_	
GPS-assisted navigation	_	_	_		•
LED headlights	_	-	_		_
Lift and tilt sensor	•	•	•	•	•
Precise area management	-	-	-	_	-
PIN code lock	•	•	•	•	•
Professional control	-	-	_	-	-
Profiles	-	•	•	•	•
Remote object detection	-	-	-	_	-
Automower® Club solution	-	-	-	_	_
Spot cutting	-	•	•	•	•
Spiral cutting	•	•	•	•	•
Tilt sensor	•	•	•	•	•
Ultrasonic sensor	-	-	-	_	—
Weather timer	-	•	•	•	•
ACCESSORIES AVAILABLE					
Automower® Connect	-	(•)	(•)	(•)	•
Fairway kit	-	_	_	_	(•)
Front head lights	-	-	-	-	_
Housing	-	(●)	(●)	(•)	(•)
Rough terrain kit	-	(•)	(•)	(•)	(•)
Soft carry bag	-	(•)	(•)	(•)	
Wall hanger	—	(●)	(•)	(•)	(•)
Wheel brush kit	_	(●)	(•)	(•)	(•)
Body colour options	(●)	(●)	(•)	(•)	(•)

● = Available (●) = Accessory - = Not available

*Noise emissions in the environment measured as sound power (LWA) in conformity with EC directive 2000 /14 /EC. The guaranteed sound power level includes variation in production as well as variation from the text code with 1–3 dB(A)

0---



Ø

	AUTOMOWER® 405X	AUTOMOWER® 415X	AUTOMOWER® 430X NERA	AUTOMOWER® 435X AWD	AUTOMOWER® 450X NERA	AUTOMOWER® 520	AUTOMOWER® 535 AWD	AUTOMOWER® 550	AUTOMOWER® 550 EPOS
-	600	1500	3200 m ²	3500	5000	2200	3500	5000	5000 (random) / 15000 (systemati
-	62.5	62.5	130	145	210	90	145	208	210
	10	24	24	24	24	24	24	24	24
	40/15	40/15	50/25	70/50	50/25	45/15	70/50	45/15	45 / 15
	1.3	1.3	4.2	7.0	7	2.2	7.0	7.0	7.0
	Irregular/5	Irregular /5	Irregular / 5	Irregular /5	Irregular / 5	Irregular /5	Irregular /5	Irregular /5	Irregular / Systematic
	1	1	2	2	3	3	3	3	Transport paths (3)
	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
	Tripesearch	Tripesearch	Quadsearch / EPOS Guidance	Triplesearch	Pentasearch / EPOS Guidance	Pentasearch	Quadsearch	Pentasearch	EPOS Guidance
	DC	DC	DC UltraQuiet	Ultrasilent drive, DC	DC UltraQuiet	Ultrasilent drive, DC	Ultrasilent drive, DC	Ultrasilent drive, DC	Ultrasilent drive DC
	DC	DC	DC	3-phase, DC	DC	3-phase, DC	3-phase, DC	3-phase, DC	3-phase, DC
	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion
	2.1	2.1	5	5	7.5	3.2	5	10.4	10.4
	18	18	18	18	18	18	18	18	18
	25	25	19	40	26	30	40	35	35
	22	22	24	22	24	24	22	24	24
	20-60	20-60	20-60	30-70	20-60	20-60	30-70	20-60	20-60
_	58/61	58/61	56/55	60/62	60/58	58/59	60/62	60/61	60/61
	9	9	6	9	6	6	6	6	6
	9.6	9.6	14.6	17.3	15	11.5	17.0	13.5	14.2
_	_	_	_	•	_	-	•	-	_
_	•	•	•	•	•	•	•	•	•
	•	•	•	•	•	•	•	•	•
	•	•	•	•	•	•	•	•	•
_	_	_	•	•	•	•	•	•	•
-	•	•	•	•	•	•	•	•	•
-	•	•	•	•	•	•	•	•	•
-				-		_	-	-	-
_	•	•	•		•				
	•	•	•	•	•	•	•	•	•
_	•	•	•	-	•	-	-	-	_
_	•	•	•	•	•	-	•	-	•
_	•	•	•	•	•	•	•	•	•
_		-	(•)	-	(•)	-	_	-	•
_	-	-	(•)	-	(•)	-	-	-	(•)
_	•	•	•	•	•	•	•	•	•
_	•	•	•	•	•	-	•	-	•
_	•	•	•	•	•	•	•	•	•
	_	-	•	_	•	-	-	-	•
	•	•	•	•	•	•	•	•	•
	_	-	-	-	-	•	•	•	•
_	•	•	•	•	•	•	•	•	•
	-	-	•	•	•	-	•	•	•
	-	-	-	-	-	-	-	•	-
	•	•	•	•	•	•	•	•	•
	•	•	•	•	•	•	•	•	•
	•	•	•	•	•	•	•	•	•
	_	—	•	•	•	-	•	•	•
_	•	•	•	•	•	•	•	•	•
	•	•	•	•	•	•	۲	•	•
_	_	-	(●)	-	<u>(●)</u>	(•)	-	(●)	(●)
	•	•	•	•	•	-	•	-	•
	(•)	(•)	(•)	(•)	(•)	(●)	(•)	(●)	(●)
	(•)	(•)	(•)	_	(•)	•	_	(●)	(•)
	(•)	(•)	(●)	_	(•)	(•)	-	(●)	_
	(●)	(•)	(•)	_	(•)	(•)	-	(•)	(•)
_	(•) (•)	(•)	(•)	-	(•)	•	_	•	•

-0



ENJOYTHE MOWING EVERYWHERE

Husqvarna Riders reach places you never thought possible, helping you work in narrow spaces, on slopes and across all types of terrain. But you'll find there's more to a Husqvarna Rider than just that. Our range of machines are specifically designed to offer different working solutions for different needs. With different mowing options and a wide range of attachments for everything from mowing to snow throwing, they deliver a new level of performance.

RIDERS 🚄

WHAT YOU GET AND HOW WE DO IT

The articulated steering gives first-class manoeuvrability and facilitates driving around obstacles such as trees, bushes





SUPERIOR MANOEUVRABILITY

and flower beds.

Front-mounted cutting deck gives excellent overview of the working area, allowing you to trim edges and reach into corners and under bushes with ease.

OPTIMISED DRIVER'S POSITION

Safety, stability and traction on both flat ground and hillsides. The rider's low centre of gravity contributes to excellent traction and user comfort.

PRODUCING A HEALTHY LAWN

Our Combi cutting decks feature the superior BioClip® mulching technology, which refines grass clippings into natural fertiliser, providing a rich, green and healthy lawn.





DRIVING PLEASURE

Husqvarna Riders are easy and fun to drive with precise steering, pedal-operated hydrostatic transmissions and intuitive controls.









Integrated tool carrier. Bring your handheld machines or batteries with you and charge the with the 12V outlet. Increased comfort. The seat slides on a 10-degree incline, providing a correct angle of the knees regardless of the driver's height.

Husqvarna

Husqvarna Bioclip® – excellent mulching technology where clippings and leaves are repeatedly circulated through the blades and cut into small pieces, to become a natural fertiliser.

Power steering. Effortless turning of the wheel and increased manoeuvrability to reach the tight areas.

Powerful LED lights. Headlights with 180-degree coverage that will make it possible to keep going long past dusk, increasing productivity.

> XChange Drive-in-drive-out attachment frame. Makes it easier than ever to change your rider's attachment. The deck can be flipped into service position and the attachment changed quickly and without the use of tools which minimises downtime.

All-wheel-drive. The AWD adds traction and allows for a dependable mowing experience, no matter the surface. Heavy-duty design. Reinforced transmission, a durable, redesigned chassis and a tough, robust frame ready to take on the toughest of jobs.

HUSQVARNA 400 SERIES

A NEW GENERATION OF MOWING EFFICIENCY

When mowing a lawn, efficiency and cut quality are obvious factors that make the difference. However, there are many more things to consider. With the new generation of Riders, Husqvarna adds new levels of convenience and performance to the mix. The 400 series are a robust and powerful Rider with commercial performance in a compact, user-friendly package. The best of two worlds, really.

STAY CONNECTED, STAY INFORMED

The 300 and 400 series have connectivity built in. With your Husqvarna Connect app you can easily access your Rider's runtime data and status. You also get help with troubleshooting as well as advice on how to best care for your product. For professional users, the connectivity also makes it possible to connect to Husqvarna Fleet Services[™].



Not all features shown are available on all models.





HUSQVARNA BIOCLIP® – SUPERIOR MULCHING TECHNOLOGY

Husqvarna BioClip® is a great way to take care of grass clippings and fallen leaves. With BioClip® the clippings and leaves are repeatedly circulated through the blades and cut into small pieces, before dropping to the lawn. These cuttings are so small that they pass through the grass, down to the soil, working as a natural fertiliser. It's a convenient and environmentally friendly way to get a healthy, green lawn.

LARGE AREAS OR SMALL COMPLEX GARDENS

With cutting widths ranging from 85 to 180cm you will easily find a Husqvarna Rider that suits your preference and your garden, whether it is large and widespread or narrow and complex. Their excellent manoeuvrability and the superb accessibility offered by the front-mounted cutting decks make these ride-on mowers perform in a class of their own.



INTRODUCING THE HUSQVARNA RIDER COLLECTION SERIES

Now you can achieve a tidy lawn without clippings while enjoying all the pleasures of driving a Husqvarna Rider. The Rider Collection offers great mowing performance, both in terms of excellent manoeuvrability and problem-free collection with superior capacity.





CUTTING AND COLLECTING

The cutting deck on the Rider Collection has a special design with counter-rotating blades that efficiently cuts the grass and throws the clippings backwards to the auger. Available with a 103cm or 112cm cutting width.

MORE MOWING, LESS EMPTYING

The combination of a powerful auger compressing the grass, and a large-volume collector, is the secret behind the superior collecting capacity. The Rider Collection can hold twice the grass volume of a conventional collecting machine, so you can mow a larger area before it's time to empty.



PRODUCT USE GUIDE

Use this guide to help you select the best product for your needs.

								CUTTING SYST	EM	
TYPE OF USE	MODEL	ENGINE TYPE	CUTTING WIDTH	OVERALL MACHINE WIDTH	OVERALL MACHINE LENGTH	DRIVE SYSTEM	MULCH	REAR EJECT	COLLECTION	
	R 112C	Single	85cm	90cm	212cm	Hydrostatic	•	•		
	R 112iC	Li-ion	85cm	88.3cm	212cm	Electric	•	•		
	R 200iX	Li-ion	94cm / 103cm	89cm	199cm	Electric	•	•		
	R 214	V-Twin	94cm / 103cm	88.3cm	194.2cm	Hydrostatic	•	•		
OCCASIONAL USE	R 214C	V-Twin	94cm	88.3cm	192.2cm	Hydrostatic	•	•		
	R 214T	V-Twin	94cm / 103cm	100cm / 108cm*	223cm	Hydrostatic	•	•		
	R 214TC	V-Twin	94cm	100cm	223cm	Hydrostatic	•	•		
	R 216T AWD	V-Twin	94cm / 103cm	100cm / 108cm*	223cm	Hydrostatic AWD	•	•		
	R 320X AWD	Single	103cm / 112cm	108cm / 118cm*	226cm / 228cm*	Hydrostatic AWD	•	•		
	R 316TX	V-Twin	103cm / 112cm	108cm / 118cm*	226cm / 228cm*	Hydrostatic	•	•		
FREQUENT USE (DEMANDING	R 316TsX AWD	V-Twin	103cm / 112cm	108cm / 118cm*	226cm / 228cm*	Hydrostatic AWD	•	•		
DOMESTIC /LANDOWNER)	RC 318T	V-Twin	103cm / 112cm	109cm / 118cm*	240cm	Hydrostatic			•	
	RC 320Ts AWD	V-Twin	103cm / 112cm	109cm / 118cm*	240cm	Hydrostatic AWD			•	
PART-TIME USE (LANDOWNER / LANDSCAPER USE)	R 420TsX AWD	V-Twin	112cm / 122cm	118cm / 128.5cm*	230cm / 254cm*	Hydrostatic AWD	•	•		
	P524X	V-Twin	112cm / 137cm	TBC	249cm / 252cm*	Hydrostatic AWD	•	•		
	P524X EFI	V-Twin EFi	112cm / 137cm	TBC	249cm / 252cm*	Hydrostatic AWD	•	•		
FULL-TIME USE	P524XR EFI	V-Twin EFi	112cm / 137cm	TBC	249cm / 252cm*	Hydrostatic AWD	•	•		
(PROFESSIONAL)	P 525DX	Diesel	132cm / 155cm	138cm / 161cm*	268cm / 275cm*	Hydrostatic AWD	•	•		
	P 535HX	Diesel Hybrid	132 / 155 / 180cm	161cm / 186cm*	TBC	Digital AWD	•	•		

The product selector is only to be used as a guide. Please visit your local Authorised Husqvarna dealer for more information.

* - Overall width / length with larger cutting width Combi deck. o Not the optimum solution.

NOTE: Overall machine dimensions are approximate and to be used as a guide only. Husqvarna reserve the right to change specification detail without prior notice.

		RECOMMEND	ED LAWN AREA			ALL YEAR ROUND USE			
	*	*	*					PAGE	
SMALL	MEDIUM	MEDIUM / LARGE	LARGE	PROFESSIONAL GROUNDS MAINTENANCE	FRONT MOUNT ACCESSORIES	POWERED FRONT MOUNT ACCESSORIES	TRAILED ACCESSORIES		
•	0						0	194	
•	•						•	194	
•	•				•		•	195	
•	•				•		•	195	
•	•				•		•	195	
•	•	o			•		•	196	
•	•	0			•		•	196	
•	•	0			•		•	197	
•	•	•	o		•	•	•	199	
•	•	•	o		•	•	•	198	
•	•	•	o		•	•	•	198	
•	•	•	0				•	200	
•	•	•	0			•	•	200	
	•	•	•	o	•	•	•	202	
	•	•	•	•	•	•	•	212	
	•	•	•	•	•	•	•	213	
	•	•	•	•	•	•	•	213	
			•	•	•	•	•	215	
			•	•	•	•	•	218	



OCCASIONAL AND DEMANDING OCCASIONAL USE



The 100 series rider is designed for domestic use in small to medium areas. The compact platform with 85cm Combi cutting deck ensures you can cut more grass in less time leaving an excellent finish without the worry of disposing of grass clippings.

The 200 series are designed for more demanding domestic and landowner use. Additional 200 series features include box frame chassis, larger exhaust silencer for lower noise, service position for deck cleaning and maintenance and a comfort seat. With 2 smaller Combi deck options available, the 200 series riders are also just as well suited working in medium size open expanses.

Ideal for applications including:

- Small to medium lawns
- Complex areas with obstacles
- Confined areas
- All year round use

R 112C



Compact rider designed for domestic use on smaller areas. Excellent manoeuvrability allows easy navigation in confined and complex areas. Bioclip® cutting deck provides excellent cutting results.

BioClip® cutting deck

Supplied with cutting deck

EngineEngine size / PowerTransmissionCutting widthHusqvarna 413AE344cm³ / 6.4kWHydrostatic85cmModelOrder PNCRRP ex VATRRP inc VATD 1100 CF cm067 37.0 4000RRP ex VATRRP inc VAT

• 65cm uncut circle



R 112iC

Compact battery powered rider designed for domestic use on smaller areas. Excellent manoeuvrability allows easy navigation in confined and complex areas. Bioclip® cutting deck provides excellent cutting results.

- BioClip® cutting deck
- Dynamic Mowing
- Up to 3000m² per charge
- 65cm uncut circle
 Bluetooth connecti

•	Keypad with sav	/E ^{IM}	Bluetooth connectivity				
	Engine	Engine size / Power	Transmission	Cutting width			
	Li-ion	52V	Electric drive	85cm			
	Model	Order PNC	RRP ex VAT	RRP inc VAT			
	R 112iC 85cm	967 84 82-01					

RIDERS _

R214C

NEW



Multipurpose for the multitaskers, the Rider R 200iX leads the shift towards electric riding lawn mowers. Dynamic mowing mode autonomously adapts to suit any lawn condition for an even cut.

- Front Mounted Electric Cutting Deck Articulated Steering
- BioClip®

R200iX

- savE™
- Dynamic Mowing
- 100% Battery Powered

	J		Jweleu
Engine	Engine size / Power	Transmission	Cutting width
Li-ion	50.4V	Electric drive	94cm / 103cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
R200iX Unit	970 64 99-01		
C94i	970 65 00-01		
C103i	970 65 01-01		



Efficient Rider with 94cm Combi cutting deck, offering first-class BioClip® and rear ejection cutting.

- BioClip® cutting deck
- Hour meter
- Turn key start

 Service position
30cm uncut circle
Supplied with cutting deck

Engine	Engine size / Power	Transmission	Cutting width
Husqvarna HS 413AE	413cm ³ / 8.4kW	Hydrostatic	94cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
R 214C 94cm	970 51 94-01		

R214



Ideal for taking care of larger lawns, this versatile ride-on lawn mower is efficient all year round. It can be fitted with a 94cm or 103cm combi cutting deck with two cutting options - BioClip® mulching for lawn fertilization and rear ejection cutting for higher, tougher grass.

Service position

- BioClip® cutting deck
- Hour meter • Turn key start

R 214 Unit

Combi 94cm Combi 103cm • 30cm uncut circle

970 54 21-01 967 15 22-01

967 15 23-01

	Engine	Engine size / Power	Transmission	Cutting width
Н	usqvarna HS 452AE	452cm ³ / 9.5kW	Hydrostatic	94cm / 103cm
	Model	Order PNC	RRP ex VAT	RRP inc VAT

COMBI CUTTING DECKS - 200 SERIES



Combi cutting decks offering two cutting methods: BioClip® and rear ejection. As the deck is stamped from a single piece of metal, with no seams and sharp bends to trap cuttings, the result is market-leading mulching and super-efficient ejection. Fits to R214, R 214T and R 216T AWD.

Cutting deck	Order PNC
Combi 94cm	967 15 22-01
Combi 103cm	967 15 23-01

REPLACEMENT BLADES

Cutting deck	Combi 94cm	Combi 103cm		
Blade type	Mulch x 3			
PNC	579 65 25-10	504 18 82-10		
BATTERY CHARGERS				
PS300T R 112iC Bat	595 30 86-01			
PS300C R200iX Battery Charger		537 54 80-02		

(f) www.facebook.com/HusqvarnaUK



OCCASIONAL AND DEMANDING OCCASIONAL USE



The 100 series rider is designed for domestic use in small to medium areas. The compact platform with 85cm Combi cutting deck ensures you can cut more grass in less time leaving an excellent finish without the worry of disposing of grass clippings.

The 200 series are designed for more demanding domestic and landowner use. Additional 200 series features include box frame chassis, larger exhaust silencer for lower noise, service position for deck cleaning and maintenance and a comfort seat. With 2 smaller Combi deck options available, the 200 series riders are also just as well suited working in medium size open expanses.

Ideal for applications including:

- Small to medium lawns
- Complex areas with obstacles
- Confined areas
- All year round use

R 214TC



Powerful compact rider designed for demanding domestic and landowner use on small to medium size areas. With a powerful Husqvarna V-twin engine, this rider offers superby efficiency and manoeuvrability

- BioClip® cutting deck
- Hour meter
- Turn key start
- Service position30cm uncut circle
- Supplied with cutting deck

Engine	Engine size / Power	Transmission	Cutting width
Husqvarna V-Twin	586cm ³ / 11.3kW	Hydrostatic	94cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
R 214TC 94cm	970 54 23-01		

R 214T



Powerful compact rider designed for demanding domestic and landowner use on small to medium size areas. With a powerful Husqvarna V-twin engine, this rider offers superby efficiency and manoeuvrability. Choice of cutting widths.

- BioClip® cutting decks
- Hour meter
- Turn key start
- Service position30cm uncut circle
- Engine Engine size / Power Transmission Cutting width Husgvarna 586AE 586cm³ / 11.3kW Hydrostatic 94cm / 103cm Model Order PNC RRP ex VAT RRP inc VAT R 214T Unit 970 54 22-01 Combi 94cm 967 15 22-01 Combi 103cm 967 15 23-01

RIDERS

R 216T AWD



High specification rider designed for demanding domestic and landowner use on smal to medium size areas. Features a powerful Husqvarna V-twin engine and AWD ideal for tackling the most demanding conditions. Choice of cutting width.

- BioClip® cutting decks
- Hour meter Turn key start
- Service position30cm uncut circle
- LED Headlights

Engine	Engine size / Power	Transmission	Cutting width
Husqvarna V-Twin	586cm³ / 11.3kW	Hydrostatic AWD	94cm / 103cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
R 216T AWD Unit	970 54 24-01		
Combi 94cm	967 15 22-01		
Combi 103cm	967 15 23-01		

COMBI CUTTING DECKS - 200 SERIES



Combi cutting decks offering two cutting methods: BioClip® and rear ejection. As the deck is stamped from a single piece of metal, with no seams and sharp bends to trap cuttings, the result is market-leading mulching and super-efficient ejection. Fits to R 214T and 216T AWD.

Cutting deck	Order PNC
Combi 94cm	967 15 22-01
Combi 103cm	967 15 23-01

REPLACEMENT BLADES

Cutting deck	Combi 94cm	Combi 103cm
Blade type	Mulch x 3	
PNC	579 65 25-10	504 18 82-10



FREQUENT USE

RIDERS



Highly specified and versatile riders for demanding domestic and landowner use. Ideal for confined complex areas as well as open expanses. Additional 300 series features include attachment frame for powered front attachments, hour meter, fully floating deck for uneven areas and high back comfort seat. With 2 Combi deck options available the 300 series riders are adaptable to suit different requirements. With the option of AWD and a range of front attachments they are also suited to all year round use. All machines feature Bluetooth Connectivity through the Husqvarna Connect App.

Ideal for applications including:

- Medium to large lawns .
- **Complex areas with obstacles**
- **Confined** areas
- All year round use

R 316TX



Easy to use versatile rider designed for frequent demanding domestic / landowner use. High torque V-Twin engine provides smooth and efficient mowing, even in demanding conditions. Choice of cutting widths.

- BioClip® cutting decks
- Headlights & digital display
- Powered front attachments
- Service position
- 30cm uncut circle

Engine	Engine size / Power	Transmission	Cutting width
Kawasaki FS V-Twin	603cm ³ / 9.6kW	Hydrostatic	103cm / 112cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
R 316TX Unit	970 54 27-01		
Combi 103cm	967 15 24-01		
Combi 112cm	967 18 85-01		

R 316TsX AWD



High specification, versatile rider designed for frequent demanding domestic / landowner use. Easy to use, with high torque V-Twin engine, AWD, power steering and attachment frame allows efficient and effective all year round use in a range of applications.

- BioClip® cutting decks Service position
- 30cm uncut circle
- Power steering & Efficiency pack
 Powered front attachments
- Headlights & digital display

Engine	Engine size / Power	Transmission	Cutting width
Kawasaki FS V-Twin	603cm ³ / 9.8kW	Hydrostatic AWD	103cm / 112cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
R 316TsX AWD Unit	970 54 29-01		
Combi 103cm	967 15 24-01		
Combi 112cm	967 18 85-01		

RIDERS _

R 320X AWD

UPDATED



Versatile rider designed for frequent demanding domestic / landowner use. AWD transmission provides improved traction on more demanding ground conditions. Choice of front attachments for maximum flexibility.

- BioClip® cutting decks
- Headlights & digital display
- Powered front attachments

iy	30cm uncut circle
· c	 Turn kov start

Turn key start

Service position

Engine	Engine size / Power	Transmission	Cutting width
Husqvarna 546AE	546cm ³ / 10.3kW	Hydrostatic AWD	94cm / 103cm / 112cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
R 320X AWD Unit	970 54 26-01		
Combi 94cm	967 15 22-01		
Combi 103cm	967 15 24-01		
Combi 112cm	967 18 85-01		

COMBI CUTTING DECKS - 300 SERIES



Combi cutting decks offer two cutting methods: BioClip® and rear ejection. As the deck is stamped from a single piece of metal, with no seams and sharp bends to trap cuttings, the result is market-leading mulching and super-efficient ejection. Fits to all 300 series models.

Cutting deck	Order PNC
Combi 103cm	967 15 24-01
Combi 112cm	967 18 85-01

REPLACEMENT BLADES

Cutting deck	Combi 103cm Combi 112cm	
Blade type	Mulch x 3	
PNC	504 18 82-10 504 18 81-	

ALL YEAR ROUND USE

Range of attachments. Pages 204 - 205







HUSQVARNA CONNECT APP

Stay connected to your 300 series rider direct from your smartphone. Available from App Store and Google Play.









FREQUENT USE



Highly specified and versatile riders with grass collection for demanding domestic and landowner use. Ideal for confined complex areas as well as open expanses. Standard RC 300 series features include ACTech™ problem-free grass collection, service position. hour meter, fully floating deck for uneven areas and high back comfort seat. With 2 cutting deck options available, the RC 300 series riders are adaptable to suit different requirements. With the option of AWD they are able to tackle more demanding situations.

Ideal for applications including:

- Medium to large lawns
- Complex areas with obstacles
- Confined areas
- All year round use

RC 320Ts AWD



High-specification Rider with ACTech[™] collection system with anti-clog auger and large collection capacity. Powerful twin cylinder engine with Turn Key start, empty bag and select collection mode from seat. Model features AWD which provides improved traction on more demanding ground conditions and power steering. Choice of cutting widths.

Collection cutting decksACTech[™] anti-clog auger

Service positionAll wheel drive

- 50cm uncut circleCompacting 300 litre collector
 - LED Headlights & hour meter

UPDATED

• Power steering

RC 318T



High-specification Rider with ACTech[™] collection system with anti-clog auger and huge collection capacity. Powerful twin cylinder engine with Turn Key start, empty bag and select collection mode from seat. Choice of cutting widths.

- Collection cutting decks
- ACTech[™] anti-clog auger

Service position


- 50cm uncut circleCompacting 300 litre collector
- Headlights & hour meter

Engine	Engine size / Power	Transmission	Cutting width
Husqvarna 635AE	635cm ³ / 12.7kW	Hydrostatic	103cm / 112cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
RC 318T Unit	970 62 11-01		
Combi 103cm	967 97 81-01		
Combi 112cm	967 97 82-01		

200

RIDERS







The specially designed cutting deck has counter-rotating blades that efficiently cuts the grass and feed the auger. The service position allows for easy cleaning and maintenance.



All controls are grouped together maximising user comfort and ensuring safe control. Turn key start allows easy starting, no choke needed, just turn the key and go.

Engine	Engine Size / Power	Transmission	Cutting width
Husqvarna 635AE	636cm ³ / 12.7kW	Hydrostatic AWD	103cm / 112cm
Model	Order PNC	RRP Ex VAT	RRP Inc VAT
RC 320Ts AWD Unit	970621201		
103cm	967 97 81-01		
112cm	967 97 82-01		

CUTTING DECKS - RC 300 SERIES



Cutting decks designed specifically for Rider Collection models. As the deck is stamped from a single piece of metal, with no seams and sharp bends to trap cuttings, the result is excellent cutting performance. Fits to RC 300 series models only.

Cutting deck	Order PNC
103cm	967 97 81-01
112cm	967 97 82-01

REPLACEMENT BLADES

Cutting deck	103cm	112cm	
Blade type	Colle	ction	
PNC (LH)	590 74 94-10	588 82 43-10	
PNC (centre)	588 82 44-10	588 82 44-10	
PNC (RH)	590 74 94-20	588 82 43-20	

Locate your nearest dealer Visit: www.husqvarna.com/uk/dealer-locator

DID YOU KNOW?

The unique ACTech[™] collection system compacts the grass collecting significantly more when compared to conventional collection systems.





PART-TIME USE



High performance, versatile riders designed for demanding landowner and landscaper use on medium to large areas. The machines have an exceptional work rate due to high manoeuvrability and the ability to access tight restricted areas. Additional 400 series features include XChange Drive-in-driveout attachment frame for tool-less attachment change, hydraulic lift and ergonomic fully adjustable cockpit. Built with the capacity to maintain larger areas, together with the optional all year round attachments make them a highly versatile all round machine.

- Ideal for applications including:
- Larger lawns
- Farm and country estates
- Sports facilities
- Grounds maintenance
- All year round use

R 420TsX AWD



Compact high performance AWD rider designed for demanding part time use. Extremely manoeuvrable making it ideal for tight and complex areas. XChange Drive-in-drive-out attachment frame lets you change attachments quickly and without the use of tools. Ideally suited for all year round use. Model features AWD which provides improved traction on more demanding ground conditions and power steering. Choice of cutting widths.

- BioClip® cutting decks
- Drive-in-drive-out attachments
- Power steering
- All wheel drive
- Optional cargo holder
- 70cm uncut circle
- High intensity LED Headlights
- Hydraulic lift
- Digital dashboard
- Husqvarna Connect

Visit: www.husqvarna.com/uk/riders

RIDERS









XChange Drive-in-drive-out attachment frame. Makes it easier than ever to change your rider's attachment. The deck can be flipped into service position and the attachment changed quickly and without the use of tools.

Increased comfort. The seat slides on a 10-degree incline, securing a correct angle of the knees regardless of the driver's height. The steering column height is also adjustable.

All controls are grouped together maximising user comfort and ensuring safe control. Smart display. The new intuitive overview and display will give you real time updates on your rider's status.

Engine	Engine Size / Power	Transmission	Cutting width
Kawasaki FS V-Twin	726cm ³ / 14.0kW	Hydrostatic AWD	103cm / 112cm / 122cm
Model	Order PNC	RRP Ex VAT	RRP Inc VAT
R 420TsX AWD Unit	967 64 84-01		
Combi 112cm (2019 4 series mount)	967 64 90-01		
Combi Turf 122cm (2019 4 series mount)	967 64 91-01		



COMBI CUTTING DECKS - 400 SERIES



XChange Combi cutting decks offer two cutting methods: BioClip® and rear ejection. As the deck is stamped from a single piece of metal, with no seams and sharp bends to trap cuttings, the result is market-leading mulching and super-efficient ejection. Fits to all 400 Series 2019 > * NOTE Combi 122cm fits R 420TsX AWD only

Cutting deck	Order PNC
Combi 103cm	967 64 89-01
Combi 112cm	967 64 90-01
Combi 122cm*	967 64 91-01

REPLACEMENT BLADES

Cutting deck	Combi 103cm Combi 112cm Combi 122		Combi 122cm
Blade type	Mulch x 3		
PNC	504 19 04-10	504 18 78-10	535 42 94-10

Locate your nearest dealer Visit: www.husqvarna.com/uk/dealer-locator

ALL YEAR ROUND USE

Range of XChange Drive-in-drive-out attachments. Pages 204 - 205



HUSQVARNA RECOMMEND

The cargo holder accessory allows additional items such as a handheld blower or personal items to be carried securely on the machine hood.





120

RIDERS

RIDER ACCESSORIES



The perfect lawn requires more than simply cutting. Additional maintenance is needed for optimum health and appearance. Towed accessories are an efficient way of getting excellent results with ease. The comprehensive range of powered and non-powered front mount accessories also enables true year round use, making maximum use of your investment.

FLAIL MOWER



Robust, reliable flail mower for rough areas with overgrown grass and low brushwood. 90cm working width.

Fits to	Order PNC
300 Series	966 41 61-01
RRP ex VAT	RRP inc VAT

FLAIL MOWER R400



Robust, reliable flail mower for rough areas with overgrown grass and low brushwood. 100cm working width.

Fits to	Order PNC
400 Series 2019>	596 28 92-01
RRP ex VAT	RRP inc VAT

BROOM R300



Power broom for sweeping of sand, gravel and leaves. Adjustable working angle from driver's seat. Max working width 95cm.

Fits to	Order PNC
300 Series	587 02 46-01
RRP ex VAT	RRP inc VAT

SNOW BLADE R400



Snow blade for clearing paths and driveways. Can be set to different angles. Requires rubber strip 531 02 12-40. Working width 125cm.

Fits to	Order PNC
400 Series 2019>	596 29 00-0
RRP ex VAT	RRP inc VAT

FLAIL MOWER RC



Robust, reliable flail mower for rough areas with overgrown grass and low brushwood. 90cm working width.

Fits to	Order PNC
RC 320Ts AWD	596 28 98-01
RRP ex VAT	RRP inc VAT



Power broom for sweeping of sand, gravel and leaves. Adjustable working angle from driver's seat. Max working width 95cm.

Fits to	Order PNC
RC 320Ts AWD	593 02 43-01
RRP ex VAT	RRP inc VAT

BROOM R400

Power broom for sweeping of sand, gravel and leaves. Adjustable working angle from driver's seat. Max working width 120cm.

Fits to	Order PNC
400 Series 2019>	596 28 87-01
RRP ex VAT	RRP inc VAT

SNOW THROWER R300



Highly effective, heavy-duty single-stage thrower designed for use on AWD models. Working width 100cm.

Fits to	Order PNC
300 Series AWD	967 27 67-01
RRP ex VAT	RRP inc VAT

SNOW BLADE R200



Snow blade for clearing paths and driveways. Can be set to different angles. Requires rubber strip 531 02 12-40. Working width 120cm.

Fits to	Order PNC
200 Series	965 07 09-01
RRP ex VAT	RRP inc VAT



Snow blade for clearing paths and driveways. Can be set to different angles. Requires rubber strip 531 02 12-40. Working width 120cm.

Fits to	Order PNC
300 Series	966 41 59-01
RRP ex VAT	RRP inc VAT



SNOW THROWER R400



Highly effective, heavy-duty single-stage thrower designed for the most demanding conditions. Working width 100cm.

Fits to	Order PNC
400 Series 2019>	596 28 93-01
RRP ex VAT	RRP inc VAT

ATTACHMENT PLATFORM



Attachment platform for aerator, plug aerator and dethatcher. Attachments are easily changed without tools.

Fits to	Order PNC
200 - 400 series	586 63 72-01
RRP ex VAT	RRP inc VAT

SPREADER 75



Ideal for applying seed, fertiliser or salt. Spreading width of 300 – 360cm. Capacity of 70kg. Adjustable flow.

Fits to	Order PNC
200 - 400 series	967 02 72-01
RRP ex VAT	RRP inc VAT

XS800 CHARGER



Charges all 12 V lead-acid batteries from 1.2–32Ah and is suitable for maintenance charging up to 100Ah.

Fits to	Order PNC
All models	579 45 01-03
RRP ex VAT	RRP inc VAT

TRAILER 275



Folding tailgate for easy loading and unloading. Loading dimensions (L × W × H): 125 × 83 × 31cm. Load capacity 225kg.

Fits to	Order PNC
100 - 400 Series	501 00 82-01
RRP ex VAT	RRP inc VAT

AERATOR



Allows air, water and nutrients to reach the soil. Rustproof blades. Requires platform.

Fits toOrder PNCAttachment platform586 63 69-01RRP ex VATRRP inc VAT



Sturdy harrow with rubber wheels. Has spring tines that fold when you reverse. Working width 110cm.

Fits to	Order PNC
200 - 400 series	953 51 24-01
RRP ex VAT	RRP inc VAT

LOADING RAMPS 20X150



Designed for riders, corrosion resistant aluminium with anti-slip surface. 20cm wide and 150cm long (200cm also available).

Fits to	Order PNC
Up to 450kg	505 69 90-40
RRP ex VAT	RRP inc VAT

SWEEPER



Robust sweeper with extra high capacity collection. Foldable for easy storage. Adjustable height setting. Working width 112cm.

Fits to	Order PNC
200 - 400 Series	586 63 65-01
RRP ex VAT	RRP inc VAT

PLUG AERATOR



Creates ground plugs which allow air, water and nutrients to reach the soil. Knives are rustproof. Requires platform.

Fits to	Order PNC		
Attachment platform	588 21 27-01		
RRP ex VAT	RRP inc VAT		

COUNTERWEIGHT



For increased grip and improved control when using attachments. Recommended on 2WD models. Weight 18kg.

Fits to	Order PNC
200 - 400 Series	953 53 49-01
RRP ex VAT	RRP inc VAT

LOADING RAMPS 26X200



Designed for larger riders, corrosion resistant aluminium with anti-slip surface. 26cm wide and 200cm long (150cm also available).

Fits to	Order PNC		
Up to 1000kg	505 69 90-45		
RRP ex VAT	RRP inc VAT		



ROLLER



Fill with water or sand to add weight. Use for levelling uneven ground or consolidating newly sown seed. Working width 91cm.

Fits to	Order PNC
200 - 400 Series	965 89 94-01
RRP ex VAT	RRP inc VAT

DETHATCHER



Removes moss, for a healthier lawn. The spring tines are heat-treated for extra durability. Requires platform.

Fits to	Order PNC
Attachment platform	586 63 68-01
RRP ex VAT	RRP inc VAT

RIDER COVER



Tailored rider cover made from water resistant nylon with adjustable drawstring and ventilation holes.

Fits to	Order PNC
All models	505 63 08-70
RRP ex VAT	RRP inc VAT



RIDERS

TECHNICAL SPECIFICATIONS

	R 112iC	R 112C	R 200iX	R 214	R 214C	R 214TC
Engine manufacturer	-	Husqvarna	-	Husqvarna	Husqvarna	Husqvarna
Engine name	_	HS 413AE	-	HS 452AE	HS 413AE	HS 586AE
Net power at preset rpm, kW	_	8.4@3000	_	9.5@3100	8.4@3000	11.3@3100
Battery, V/Ah	50.4/38.5	12/21	50.4V	12/24	12/24	12/24
Engine lubrication type	_	Pressure	-	Pressure	Pressure	Pressure
Fuel tank volume, litres	_	4	_	12	12	12
Transmission type	Electric	Hydrostatic	Electric	Hydrostatic	Hydrostatic	Hydrostatic
Transmission manufacturer	_	Hydro-Gear	_	Tuff Torq	Tuff Torq	Tuff Torq
Sound power level, guaranteed (LWA), dB(A)*	96	99	TBC	100	99	98
Sound pressure level at operators ear, dB(A)**	80	85	TBC	86.4	84	83
Vibration level steering wheel, m/s ^{2***}	0.1	1.1	TBC	2.1	_	2.5
Vibration level seat, m/s ^{2***}	0.27	0.5	TBC	0.61		0.7
Cutting methods	BioClip® / Rear ejection					
Cutting width, min-max, cm	85	85	94 / 103	94 / 103	94	94
Cutting height, min-max, mm	25-75	25-70	25-75	25-75	25-75	25-75
Uncut circle, cm	65	65	TBC	30	30	30
Blades	2	2	TBC	3	3	3
Collector volume. litres	_	-	_	_	_	_
Tyre dimensions	155/50-8	155/50-8	170/60-8	170/60-8	170/60-8	170/60-8
Base machine, height, cm	106.9	108	113	113	107	107
Base machine, length, cm	211.9	212	199	194.2	192.2	223
Base machine, width, cm	88.3	88	89	88.3	88.3	100
Weight, kg	161	190	186	192	191	244
FEATURES	101	100	100	102	101	2
ACTech™	_	-	_	-	_	_
Adjustable steering wheel	•	-	•	•	•	•
All-Wheel-Drive	_	-	_	_	_	_
Articulated steering	_	-	•	•	•	•
Attachment frame	•	-	•	•	_	_
XChange attachment frame	_	-	_	_	_	
Automatic blade engagement	•	•	•	•	•	•
Cargo holder	_	_	•	_	_	_
External fuel cap	_	•	_	•	•	•
Front-mounted cutting deck	•	•	•	•	•	•
Headlights	_	_	_	_	_	_
Dual LED headlights	_	_	_	_	_	
HMI Display	•	_	•	_	_	_
Hour meter	•	_	•	•	•	•
Hydraulic equipment lift	_	_	-	_	_	_
Integrated Connectivity - Husqvarna Connect	•	_	_	_	_	
Pivoting rear axle	•	•	•	•	•	•
Proving rear axie Power steering	-	-	-	-	-	_
Service position	_	_	•	•	•	•
Transparent fuel tank	_	•	-	•	•	•
		-				
Turn key start	•	-	•	•	•	•
12 V socket outlet	_	-	•	-	_	_
CUTTING DECKS						
Combi 85	•	•	-	-	-	-
Combi 94	-	-	(•)	(•)	•	•
Combi 103	-	-	(●)	(•)	(●)	(•)
Combi 112	_	-	_	-	_	—
Combi 122	-	-	-	-	-	-

• = Available (•) = Accessory — = Not available *Noise emissions in the environment measured and calculated as guaranteed sound power level according to EC-Directive 2000/14/EC. The guaranteed sound power level includes variation in production as well as variation from the test code with 1–2 dB(A). **Sound pressure level according to ISO 5395 an EN 836. Reported data for sound pressure level has a typical statistical dispersion (standard deviation) of 12 dB(A). Noise emissions and sound pressure level can be influenced by the cutting unit used. Declared figures are for the machine equipped with the most used cutting unit for the specific mower model. For further information, see the operator's manual. ***Vibration level according to ISO 5395 and EN 836. Reported data for vibration has a typical statistical dispersion of 0.2 m/s² (steering wheel) and 0.8 m/s² (seat).



R 214T	R 216T AWD	R 320X AWD	R 316TX	R 316TsX AWD	RC 318T	RC 320Ts AWD	R 420TsX AWD
Husqvarna	Husqvarna	Husqvarna	Kawasaki	Kawasaki	Husqvarna	Briggs & Stratton	Kawasaki
HV 586AE	HV 586AE	HS 546AE	FS Series V-Twin	FS Series V-Twin	HV 635AE	Husqvarna	HV 635AE
9.9@3100	11.3@3100	10.3@2900	9.6@2900	9.8@3100	12.7@2900	12.7@2900	14.0 @ 3000
12/24	12/24	12/24	12/24	12/24	12/5.5	12/5.5	12/24
Pressure	Full pressure	Full pressure	Full pressure	Full pressure	Full pressure	Full pressure	Full pressure
12	12	12	12	12	12	12	17
Hydrostatic	Hydrostatic AWD	Hydrostatic AWD	Hydrostatic	Hydrostatic AWD	Hydrostatic	Hydrostatic AWD	Hydrostatic AWD
Tuff Torq	Tuff Torq	Kanzaki	Tuff Torq	Kanzaki	Tuff Torq	Tuff Torq	Tuff Torq
99	99	99	98	99	100	100	98
83	84	84	83	84	85	85	82
2.5	2.5	2.5	2.5	2.5	2.5	2.4	2.7
0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.2
BioClip® / Rear ejection	BioClip® / Rear ejection	BioClip® / Rear ejection	BioClip® / Rear ejection	BioClip® / Rear ejection	Collect / Non collect	Collect / Non collect	BioClip® / Rear ejection
94-103	94-103	103-112	103-112	103-112	103-112	103-112	112-122
25-75	25-75	25-75	25-75	25-75	25-75	25-75	25-75
30	30	30	30	30	50	50	70
3	3	3	3	3	3	3	3
_	_	_	_	-	300	300	_
170/60-8	170/60-8	170/60-8	170/60-8	170/60-8	16 x 6.5-8	16 x 6.5-8	200/65-8
107	112	115	115	115	128.4	129.5	117.8
190	196	202	202	202	208.9	208.9	207
89	89	89	89	89	103	103.5	96.4
208	226	253	238	248	326	328	325
200	220	200	200	2.10	020	020	020
-	-	-	_	-	•	•	_
•	•	•	•	•	•	•	•
-	•	•	-	•	-	•	•
•	•	•	•	•	•	•	•
-	-	•	•	•	•	•	•
-	-		-	-	-	-	•
•	•	•	•	•	•	•	•
-	-	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	٠	٠	•	•	•	•	٠
-	•	-	-	-	•	•	-
-	-	•	•	•	-	-	•
_	_	•	•	•	_	_	•
•	•	•	•	•	•	•	•
-	_	_	_	_	_	-	•
_	_	•	•	•	_	_	•
•	•	•	•	•	•	•	•
_	_	_	_	•	_	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	_	_	•	•	_
_	_	_	_	•	•	•	•
				*	•	-	•
_	-	-	-	-	-	-	-
	()		_	-	_	-	—
 (•)	(●)	-					
(•) (•)	(•) (•)	(●)	(•)	(•)	(•)	(●)	-
()			 (●) (●) 	 (●) (●) 	(•) (•)	(•) (•)	(●)

NOMINAL POWER A new machinery directive (2006/42/EC) came into force on January 1, 2010, requiring manufacturers to declare the nominal power of engines, in kilowatts (kW). The power rating of the engines indicated is the average net power output during a normal working situations and meets applicable noise regulations (at specified rpm, see owner manual) of a typical production engine for the engine model measured to SAE standard J 1349/ISO 1585. Mass production engines may differ from this value. Actual power output for the engine installed in the final machine will depend on the operating speed, environmental conditions and other variables.



GETTHEJOB DONE QUICKLY WELLAND ANYWHERE

husqvarna.com/professional-ride-on-front-mower

High power and extreme versatility in a compact, durable format. That's the winning formula behind the commercial-grade front mowers from Husqvarna. With their efficient cutting decks and a wide range of useful attachments, these agile machines will help increase your daily turnover all year round, whether you prefer diesel, petrol or hybrid technology.



WHAT YOU GET. HOW WE DO IT.

SUPERIOR MANOEUVRABILITY

The articulated steering system allows the rear pair of wheels to swing in underneath the machine. The result is superior manoeuvrability with a minimum turning radius at full lock. The compact size together with the articulated steering makes it easy to manoeuvre the machine in narrow spaces and tricky areas.



EXCELLENT ACCESSIBILITY AND CONTROL

The front-mounted cutting decks give excellent overview of the working area, enabling precise, close-up trimming. The off-set design of the cutting Combi 155 / X enables easy handling of corners and trimming against walls and fences, while the low profile gives unbeatable accessibility in under fences, bushes, park benches etc.

ALL-TERRAIN DRIVING PERFORMANCE

All-Wheel Drive (AWD) ensures traction on uneven, wet and slippery areas and slopes. The machine's low centre of gravity in combination with the high-performing AWD-system gives excellent slope and hillside stability. AWD automatically adjusts the traction on all wheels depending on situation and ground condition. Equipped with high-specified variable piston pumps with separate gear boxes for the front and rear axle. The Hybrid P 535HX uses individual electric wheel motors with traction control for maximum performance in even the most demanding conditions.





REDUCE FOLLOW-UP TRIMMING - SAVE TIME AND MONEY

Studies* show that large-scale commercial mowers only mow about 65% of the total area of the areas they work on. The remaining 35% has to be taken care of later, using a walk-behind mower or a trimmer. The result is markedly lower productivity and more expensive labour costs. And in the end, reduced profitability. The reason for this is that most commercial Ride-on mowers aren't designed for the complex lawn shapes that professional landscapers have to deal with on a daily basis. The exception is our 500 series of compact front mowers. These machines offer lots of smart solutions that reduce the amount of follow-up trimming to 20%. Which means you finish the job earlier and can be on the way to the next one.



* Studies comparing the mowing productivity of a rear-wheel steered front mower equipped with 155cm cutting deck versus a Husqvarna P 500 equipped with 132cm cutting deck carried out during a full cutting season.

EFFICIENT ERGONOMICS MAXIMISE PRODUCTIVITY

Our commercial front mowers are equipped with ergonomic operator's interface for a comfortable ride during long working hours. Controls are easily accessible and designed for optimum user comfort. The heavy-duty hydraulic-cylinder power steering makes driving less strenuous. Large wheels both front and back provide optimal riding comfort, great accessibility and less risk of damaging delicate surfaces.





BUILT FOR YEARS OF COMMERCIAL USE

The rigid, reinforced heavy-duty steel ladder frame has an open design for excellent serviceability. For improved durability the complete rear wagon is in one piece ductile cast iron. The high-performance Combi cutting decks are stamped from a single piece of steel plate and has durable, flat-free support wheels with air-filled core to provide good dampening and smooth operation with maximum uptime.



VERSATILE ALL-SEASON USAGE

A wide range of cutting decks and attachments will make your front mower exceptionally versatile, all year round. The smart quick coupling allows attachments to be changed quickly and efficiently with a minimum of standard tools. Equipped with solid and hardened PTO shaft for maximum efficiency and durability. Husqvarna P 525DX is also available in a cabin-equipped version.





ACCESSIBLE SERVICE POINTS FOR EASY MAINTENANCE

The tilting hood and easy-access servicing points make the daily maintenance checks and servicing easy. The cutting deck features greasable mandrels that are easy to reach from above, while the service position facilitates cleaning and service under the cutting deck.

CUTTING DECKS COMBINING EFFICIENCY AND EXCELLENT CUTTING RESULT

The R180 rear discharge cutting deck utilises the hybrid power of the P 535HX to maximise the mowing capacity. The Combi 132 and 155 cutting decks (available for Husqvarna P 535HX and P 525DX) can be used for both BioClip® (mulching) and rear discharge. The deck shell has been stamped out of one solid piece of steel, allowing for an optimised airflow, which is the main reason for the high efficiency. The Combi decks are made from 4.5mm steel and are equipped with replaceable side skid wears, for a long and reliable product life.





ELECTRONIC FUEL INJECTION MORE POWER – LESS FUEL AND EMISSIONS

The P 524XEFI is equipped with electronic fuel injection (EFI). Thanks to the efficient combustion, it delivers the additional power and torque you need to maintain a higher speed in uneven terrain. It also contributes to lower fuel consumption and less emissions. Starting is easy too, since there's no need for a manual choke. Just turn the key and go.



FULL-TIME USE



The P 500 series high capacity commercial front mowers are designed for professional grounds maintenance over large expanses and areas with high complexity. Powerful and extremely versatile in a compact yet durable package with highly efficient cutting decks and a wide range of all year use attachments. The P 500 machines will help increase your daily turnover all year round, whether you prefer diesel, petrol or hybrid power.

Ideal for applications including:

- Professional grounds maintenance
- Large areas with complexity
- Parks and sports facilities
- Large residential
- Holiday parks
- All year round use



Front-mounted petrol ride-on lawn mower, built for commercial use. Compact and versatile with articulated steering, All-Wheel Drive and a powerful engine from Kawasaki. An electric attachment lift enables efficient and comfortable work. Intended for facility management companies, sports clubs and for contractors who want a maneuverable ride-on solution for year-round duties in complex areas. Can be equipped with 112cm and 122cm combi cutting decks.

- Unique articulated steering system allows the rear pair of wheels to swing in underneath the machine, for superior maneuverability with a minimum turning radius at full lock.
- Low center of gravity in combination with the high-performing AWD-system gives excellent slope and hillside stability.
- Heavy-duty steel ladder frame with reinforcements combined with an open design for excellent serviceability.
- Heavy-duty hydraulic-cylinder power steering makes driving less strenuous.
- Equipped with a Kawasaki EFI-engine with overhead 90° valves. Controls the fuel injection and adjusts the ignition timing to assure maximum engine power with the lowest amount of exhaust emissions and the lowest fuel consumption.
- Raised control panel with all controls ergonomically positioned for easy access.
- The combi deck makes it easy to switch between mulching and rear discharge.

Engine	Engine size / Power	Transmission	Cutting width
Kawasaki FX Series V-Twin	726 cm³ / 13.9kW	Hydrostatic AWD	112 / 122cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
P 524X Unit	970 60 15-01		
Combi 112	970 62 62-01		
Combi 122	970 62 63-01		



P 524X EFi

NEW



Front-mounted petrol ride-on lawn mower, built for commercial use. Compact and versatile with articulated steering, All-Wheel Drive and a Kawasaki engine with Electronic Fuel Injection for enhanced power and torque. Intended for facility management companies, sports clubs and for contractors who want a manoeuverable ride-on solution for year-round duties in complex areas. Adapted for high capacity cutting decks up to 137cm.

- Unique articulated steering system allows the rear pair of wheels to swing in underneath the machine, for superior maneuverability with a minimum turning radius at full lock.
- Low center of gravity in combination with the high-performing AWD-system gives excellent slope and hillside stability.
- Heavy-duty steel ladder frame with reinforcements combined with an open design for excellent serviceability.
- Heavy-duty hydraulic-cylinder power steering makes driving less strenuous.
- Equipped with a Kawasaki EFI-engine with overhead 90° valves. Controls
 the fuel injection and adjusts the ignition timing to assure maximum
 engine power with the lowest amount of exhaust emissions and the
 lowest fuel consumption.
- Raised control panel with all controls ergonomically positioned for easy access.
- The combi deck makes it easy to switch between mulching and rear discharge.

Engine	Engine size / Power	Transmission	Cutting width	
Kawasaki EFi V-Twin	726 cm³ / 15.6kW	Hydrostatic AWD	112 / 122 / 137cm	
Model	Order PNC	RRP ex VAT	RRP inc VAT	
P 524X EFi Unit	970 60 16-01			
Combi 112	970 62 62-01			
Combi 122	970 62 63-01			
R137	970 61 20-01			





137 cm (54") cutting deck with rear discharge. High-performing deck for productive mowing of areas with heavier grass. Manual height adjustment.

Fitment	Order PNC	RRP inc vat	RRP ex vat
R137	970 61 20-01		



Front-mounted petrol ride-on lawn mower, built for commercial year-round use. Equipped with All-Wheel Drive and the possibility to manage through FlexiDrive - a seamless transition between operator seated mode and remote-control mode on areas not appropriate for ride-on mowing. Provided with a Kawasaki engine with Electronic Fuel Injection for enhanced power and torque. Adapted for high capacity cutting decks up to 137cm.

- Through the included remote-control unit, the XR-model can manage mowing on difficult and sloped areas where seated operation is excluded.
- Unique articulated steering system allows the rear pair of wheels to swing in underneath the machine, for superior maneuverability with a minimum turning radius at full lock.
- Low center of gravity in combination with the high-performing AWD-system gives excellent slope and hillside stability.
- Heavy-duty steel ladder frame with reinforcements combined with an open design for excellent serviceability.
- Heavy-duty hydraulic-cylinder power steering makes driving less strenuous.
- Equipped with a Kawasaki V-twin engine with overhead 90° valves, high performance lubrication system, cast iron cylinder liners and dual stage canister air filter. Combines exceptional power and torque with fuel efficiency and reduced emissions.
- Raised control panel with all controls ergonomically positioned for easy access.
- The combi deck makes it easy to switch between mulching and rear discharge.

Engine	Engine size / Power	Transmission	Cutting width
Kawasaki EFi V-Twin	726 cm³ / 15.6kW	Hydrostatic AWD	112 / 122 / 137cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
P 524XR Unit	970 60 17-01		
Combi 112	970 62 62-01		
Combi 122	970 62 63-01		
R137	970 61 20-01		

COMBI 112 / 122



High performance compact Combi cutting decks offering two cutting methods: BioClip® and rear ejection. Market-leading mulching performance and super-efficient ejection. 112cm & 122cm cutting widths.

Fitment	Order PNC	RRP inc vat	RRP ex vat
Combi 112	970 62 62-01		
Combi 122	970 62 63-01		

NEW

213



FLAIL MOWER

NEW

NEW

Highly efficient flail mower for rugged areas with overgrown grass and low bushes. Equipped with a durable miter gear, reinforced support wheels and height adjustment for maximum product life.

Fitment	Order PNC	RRP inc vat	RRP ex vat
P 524X Series	536 90 00-01		



Powerful rotating broom for sweeping leaves, gravel, snow, etc. Easily angled in both directions from the control panel at the driver's seat. Two rear solid support wheels follows the contour of the ground.

Requires Front Power Outlet Kit.

Fitment	Order PNC	RRP inc vat	RRP ex vat
P 524X Series	536 90 26-01		

FOLDING PLOUGH



Compact and flexible folding plough in hardened steel. Electrical adjustment from the operator's seat makes it easy to maneuver. Can be used as V-plough, point plough or diagonal plough. Possibility to adjust the attack angle to the ground. Equipped with replaceable rubber blade.

Requires Front Power Outlet Kit.

Fitment	Order PNC	RRP inc vat	RRP ex vat
P 524X Series	536 90 27-01		
TRAILER			NEW
		1	



Tippable dump trailer with folding tailgate for easy loading and unloading. Requires Trailer Coupling.



NEW

NEW

Rugged steel blade with steel blade edge. Rubber blade available as an attachment. Can be angled to either side.

Fitment	Order PNC	RRP inc vat	RRP ex vat	
P 524X Series	536 90 02-01			



Efficient and powerful two-stage snow thrower with large capacity. Easy control, by electrical maneuvering from the operator's seat, of the rotation of the tower and the angulation of the chute.

Requires Front Power Outlet Kit.

Fitment	Order PNC	RRP inc vat	RRP ex vat
P 524X Series	536 90 30-01		



Powerful steel spring rake, used together with gravel harrow for leveling gravel and collecting weeds. The control for the electric lifting and lowering of the rake is located on the control panel at the operator's seat. Requires Rear Power Outlet Kit and Bracket.

Fitment	Order PNC	RRP inc vat	RRP ex vat
P 524X Series	536 90 31-01		



Robust, towed spreader for various tasks. An electrically operated spreading roller, with easily adjustable flow, ensures even and reliable spreading. The top-placed protective grid also serves as a sieve when filling with road salt, sand, gravel and fertilizer with a particle size of up to 30mm. Requires Rear Power Outlet Kit and Trailer Coupling.

Fitment	Order PNC	RRP inc vat	RRP ex vat	Fitment	Order PNC	RRP inc vat	RRP ex vat
P 524X Series	953 51 17-03			P 524X Series	536 90 33-01		

Visit: www.husqvarna.com/uk/prorideonfrontmowers/



P 525DX WITH CABIN



Highly productive large capacity diesel machine for long shifts in very large areas.

- Powerful 1123cm³ Kubota 3-cylinder diesel engine.
- Unique articulated steering concept creates a dynamic weight transfer on the front wheels, which maximises traction in all conditions.
- The steering concept in combination with AWD and a low centre of gravity provides excellent handling on slopes.
- Commercial-grade components means uncompromised durability and maximum uptime.
- Ergonomic driver interface with modern graphic display and easyaccess to all controls.
- Built-in connectivity module allows connection to Husqvarna Fleet Services™.
- Heavy-duty square tube ladder frame (4 10mm) with an open design for easy service access.
- PTO Shaft for maximum efficiency and versatility.
- The Combi deck makes it easy to switch between mulching and rear discharge.
- Extra wide tyres and high transport speed (18.5km/h).
- Supplied with hydraulic kit.
- LED headlights

Highly productive large capacity diesel machine fitted with cabin for long shifts and all year use in very large areas.

- Powerful 1123cm³ Kubota 3-cylinder diesel engine.
- Unique articulated steering concept creates a dynamic weight transfer on the front wheels, which maximises traction in all conditions.
- The steering concept in combination with AWD and a low centre of gravity provides excellent handling on slopes.
- Commercial-grade components means uncompromised durability and maximum uptime.
- Ergonomic driver interface with modern graphic display and easyaccess to all controls.
- Built-in connectivity module allows connection to Husqvarna Fleet Services[™]
- Heavy-duty square tube ladder frame (4 10mm) with an open design for easy service access.
- PTO shaft for maximum efficiency and versatility.
- The Combi deck makes it easy to switch between mulching and rear discharge.
- Extra wide tyres and high transport speed (18.5km/h)
- Spacious cabin with large glass front window with wiper, glass doors and Grammer seat.
- Vibration-isolated from the chassis, resulting in significantly lower noise and vibrations.
- Supplied factory fitted and equipped with hydraulic kit, LED light kits and counter weight. Cabin can be removed for summer use.

Engine	Engine size / Power	Transmission	Cutting width
Kubota D 1105 diesel	1123cm ³ / 18.7kW	Fast Hydrostatic AWD	132 / 155cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
P 525DX Unit	967 98 53-01		
Combi 132	967 97 83-01		
Combi 132X	967 97 85-01		
Combi 155	967 97 84-01		
Combi 155X	967 97 86-01		

Engine	Engine size / Power	Transmission	Cutting width
Kubota D 1105 diesel	1123cm ³ / 18.7kW	Fast Hydrostatic AWD	132cm / 155cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
P 525DX with Cabin - Unit	967 98 54-01		
Combi 132	967 97 83-01		
Combi 132X	967 97 85-01		
Combi 155	967 97 84-01		
Combi 155X	967 97 86-01		





COMBI 132 / 155



Commercial Combi decks offering both BioClip® (mulching) and rear ejection. The decks have a low profile heavy duty box frame and replaceable side skid wears. The shell has been stamped from a single piece of 4.5mm thick piece of metal to optimise airflow, resulting in cutting high efficiency. Both deck sizes feature manual height adjustment.

COMBI 132X / 155X



Commercial Combi decks offering both BioClip® (mulching) and rear ejection. The decks have a low profile heavy duty box frame and replaceable side skid wears. The shell has been stamped from a single piece of 4.5mm thick piece of metal to optimise airflow, resulting in cutting high efficiency. Both deck sizes feature hydraulic height adjustment, adjustable from the seat. Hydraulic kit required when used with P 520D.

Cutting width	Cutting heights	Height adjustment	Offset position
132cm / 155cm	25 - 127mm	Manual	Combi 155 only
Model	Order PNC	RRP ex VAT	RRP inc VAT
Combi 132	967 97 83-01		
Blade Kit (3 blades)	586 19 88-10		
Combi 155	967 97 84-01		
Blade Kit (3 blades)	586 19 89-10		

Cutting width	Cutting heights	Height adjustment	Offset position
132cm / 155cm	25 - 127mm	Hydraulic	Combi 155X only
Model	Order PNC	RRP ex VAT	RRP inc VAT
Combi 132X	967 97 85-01		
Blade Kit (3 blades)	586 19 88-10		
Combi 155X	967 97 86-01		
Blade Kit (3 blades)	586 19 89-10		



P 535HX WITH HYBRID TECHNOLOGY. A NEW SMARTER WAY.

SMART GREEN SPACE MANAGEMENT

The most powerful front mower in the Husqvarna commercial range. Two electric motors power the wheel drive axles, while the PTO and electric generator are powered by a 1123cm³ Kubota diesel engine. The 20" wheels, all-wheel drive and articulated steering make it easy to manoeuvre even in rough terrain and complex areas. Prepared for high capacity cutting decks up to 180cm, providing an excellent result in any terrain. Commercial-grade components and ease of service make for uncompromised durability and maximum uptime.



LOWER EMISSIONS AND INCREASED OUTPUT

The incorporation of dual-energy sources combined with high efficiency in the Hybrid system enables high power output yet maintained in a compact and agile format. The power train reduces the vehicle's overall fuel consumption, CO_2 footprint and operational cost. Through an energy efficient electric drive vs normal hydrostatic drive, the energy efficiency in the machines propulsion system is improved by up to 50%. Hence depending on drive cycle, the fuel consumption is lowered by up to 30% when compared to a 19kW conventional diesel front mower working under the same conditions.

OPTIMISED PERFORMANCE WITH HYBRID POWER TRAIN

The P 535HX can be operated in two different drive modes. Electric mode is used during transportation vastly reducing emissions. Hybrid mode combines the diesel engine and battery buffer for maximum performance. Modes continuously adjust depending on cutting conditions. In normal conditions the power from the diesel engine is used to both operate the front attachment through the PTO, the propulsion and recharging of the batteries if needed. In demanding conditions, the power from the diesel engine is used to just operate the front attachment through the PTO. Power for propulsion is taken from the battery.



P 535HX

COMBI 132X / 155X



Powerful Hybrid commercial front mower. Two electric motors power the wheel drive axles, while the PTO and electric generator are powered by a 1123cm³ Kubota diesel engine.

- Hybrid technology using a combination of powerful 1123cc Kubota 3- cylinder diesel engine, electric generator and electric drive motors.
- Hybrid energy storage system using 4.2kWh Li-lon 52 V batteries. Batteries are recharged when the PTO is engaged.
- Unique articulated steering concept creates a dynamic weight transfer on the front wheels, which maximises traction in all conditions.
- Electric All-Wheel Drive (AWD) with battery only quiet transport mode.
- The electric AWD propulsion system is electronically controlled via integrated sensors which ensures optimised traction.
 The drive wheels individually and automatically set the correct speed in all situations.
- The steering concept in combination with AWD and a low centre of gravity provides excellent handling on slopes.
- Commercial-grade components means uncompromised durability and maximum uptime.
- Ergonomic driver interface with intuitive hi-resolution touch colour screen and easy access to all controls.
- Built-in connectivity module allows connection to Husqvarna Fleet Services™.
- Heavy-duty square tube ladder frame (4 10mm) with an open design for easy service access.
- · Engine powered PTO shaft.
- Choice of cutting decks from 132 180cm. X variant Combi decks feature hydraulic height adjustment.
- Extra wide tyres and high transport speed (19.5km/h)
- HVO100 ready, Hydrogenated Vegetable Oils (HVO) is a 100% synthetic diesel made from renewable materials.
- · Supplied equipped with hydraulic kit.

Engine	Engine size / Power	Transmission	Cutting width
Kubota D 1105 diesel	1123cm ³ / 17.8kW	Electric AWD	132 - 180cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
P 535HX Unit	967 98 55-03		
Combi 132X	967 97 85-01		
Combi 155X	967 97 86-01		
R180	967 98 56-01		

Commercial Combi decks offering both BioClip® (mulching) and rear ejection. The decks have a low profile heavy duty box frame and replaceable side skid wears. The shell has been stamped from a single piece of 4.5mm thick piece of metal to optimise airflow, resulting in cutting high efficiency. Both deck sizes feature hydraulic height adjustment, adjustable from the seat.

Cutting width	Cutting heights	Height adjustment	Offset position
132cm / 155cm	25 - 127mm	Hydraulic	Combi 155X only
Model	Order PNC	RRP ex VAT	RRP inc VAT
Combi 132X	967 97 85-01		
Blade Kit (3 blades)	586 19 88-10		
Combi 155X	967 97 86-01		
Blade Kit (3 blades)	586 19 89-10		

R180



Professional, high-capacity rear discharge cutting deck. The R180 is a heavy-duty 180cm cutting deck with rear discharge, for use with Husqvarna P 535HX. Designed for the professional user seeking a wide, high-performance cutting deck for efficient mowing of large areas and long dense grass. Shaft driven with bevel gear. Requires counterweight.

Cutting width	Cutting heights	Height adjustment	Offset position
180cm	30 - 90mm	Manual	N/A
Model	Order PNC	RRP ex VAT	RRP inc VAT
R180	967 98 56-01		
Blade (single)	599 42 15-01		



P 525DX / P 535HX ACCESSORIES



A full range of attachments designed to increase the flexibility of your investment whilst allowing true all year round use. The range consists of PTO and hydraulic controlled front mount attachments all designed for full time commercial use and optimised for use with the P 500 Series.

FLAIL MOWER



PTO driven flail mower with reinforced bevel gear. Excellent mulch performance in dense vegetation. Supplied with solid tyres. Working width 120 cm.

Requires counterweight kit.

Fitment	Order PNC	RRP inc vat	RRP ex vat
P 525DX / 535HX	596 86 75-01		

BROOM



PTO driven large diameter broom with adjustable working angle. Max/min working width 130/120 cm.

Requires counterweight kit.

Fitment	Order PNC	RRP inc vat	RRP ex vat
P 525DX / 535HX	590 45 00-01		

UTILITY BUCKET



Hydraulic adjustment of angling and emptying. Working width 120 cm. Loading capacity $65~\mbox{kg}.$

Requires counterweight kit.

Fitment	Order PNC	RRP inc vat	RRP ex vat
P 525DX / 535HX	965 99 74-01		

WEED BRUSH



PTO driven rotating steel brush for removal of weeds and dirt on paths and curbstones. Angle adjustable from seat. Diameter 50 cm.

Requires counterweight kit.

Fitment	Order PNC	RRP inc vat	RRP ex vat
P 525DX / 535HX	597 75 08-01		

BLOWER



PTO driven blower with powerful low noise fan capable of 80 m³/min air flow. 360 degree rotating air outlet adjustable from seat.

Fitment	Order PNC	RRP inc vat	RRP ex vat
P 525DX / 535HX	587 93 29-01		



SPREADER

NEW



A rugged, rear-mounted drop spreader for spreading of sand and road salt. The electrically operated spreading roller ensures even and reliable spreading.

Requires Rear Power Outlet Kit and Bracket.

Fitment	Order PNC	RRP inc vat	RRP ex vat	
P 525DX / 535HX	536 90 35-01			

FOLDING PLOUGH



Hydraulic adjustable blades. Reversible hardox steel wears with adjustable skid plates. Working width 140 cm to 119 cm.

Requires counterweight kit.

Fitment	Order PNC	RRP inc vat	RRP ex vat	
P 525DX / 535HX	965 99 72-01			

RAKE



A powerful steel spring rake, used together with gravel harrow for leveling gravel and collecting weeds. The control for the electric lifting and lowering of the rake is located on the control panel at the operator's seat.

Requires Rear Power Outlet Kit and Bracket.

GRAVEL HARROW

adjusted by machine hydraulics.

Fitment	Order PNC	RRP inc vat	RRP ex vat
P 525DX / 535HX	536 90 31-01		

Loosen compacted gravel and remove weed on paths. Ground pressure

SNOW THROWER



Highly efficient and heavy-duty two-stage snow thrower. 120 cm working width, $68\ \text{cm}$ intake height.

Requires counterweight kit.

Fitment	Order PNC	RRP inc vat	RRP ex vat	
P 525DX / 535HX	590 45 19-01			

SNOW BLADE



Rugged steel snow blade. Hydraulic adjustment and 140 cm working width. Requires counterweight kit.

Requires support wheels and rubber scraper.

Fitment	Order PNC	RRP inc vat	RRP ex vat	
P 525DX / 535HX	592 75 51-01			

GRAMMER SEAT

NEW



Deluxe seat with options for personal settings for optimum ergonomics. Available with or without heated seat. Armrests available as accessories.

Fitment	Order PNC	RRP inc vat	RRP ex vat
Standard	967 00 84-01		
Heated	967 00 84-02		

COUNTERWEIGHT



Rear counterweight for improved grip and stability. Must be used when operating front-mounted attachments. Total weight 62 kg.

Fitment	Order PNC	RRP inc vat	RRP ex vat	Fitment	Order PNC	RRP inc vat	RRP ex vat
P 525DX / 535HX	529 76 83-01			P 525DX / 535HX	529 95 79-01		

Visit: www.husqvarna.com/uk/prorideonfrontmowers/



MAKE THE WORK DAY BETTER





ATTACHMENT GUIDE

ATTACHMENT ORDER PNC P 524X P 524X EFI P 524X EFI P 524X EFI CUTTING DECK COMB I12 - - - 967 69 35-01 • • • CUTTING DECK COMB I12 - - - 967 29 32-01 • • • • CUTTING DECK COMB I132 967 97 83-01 • • - <td< th=""><th>MODEL</th><th>F</th><th>P 525DX / P 535H</th><th>X</th><th colspan="3">P 524X SERIES</th><th colspan="3"></th></td<>	MODEL	F	P 525DX / P 535H	X	P 524X SERIES					
CUTTWA CHECK COMB 122 967 97 83-01 - - 967 97 83-01 -	ATTACHMENT			1	ORDER PNC	1	1	P 524XR EFI		
DUTINGDECX COMB 132 967 97 83-01 ■ <	CUTTING DECK COMBI 112		_	-	967 69 35-01	•	•	•		
CUTTING ECX COMB ISS 967 97 84-01 • • I <thi< th=""> <thi< th=""> <thi< th=""> <thi< td=""><td>CUTTING DECK COMBI 122</td><td></td><td>_</td><td>-</td><td>967 29 37-01</td><td>•</td><td>•</td><td>•</td></thi<></thi<></thi<></thi<>	CUTTING DECK COMBI 122		_	-	967 29 37-01	•	•	•		
CUTINGGECK COMBINEX 967 97 86-01 • • - - - -	CUTTING DECK COMBI 132	967 97 83-01	•	•	-	-	-			
CUTING ECC KOMSI ISSX 967 97 86-01 - A -	CUTTING DECK COMBI 155	967 97 84-01	•	•	-	-	-			
CLTINGGECC RIB0 66798 56-01 - A -<	CUTTING DECK COMBI 132X	967 97 85-01	•	•	-	-	-			
CUTTING DECK R137 970 6120-01 - - - - <td>CUTTING DECK COMBI 155X</td> <td>967 97 86-01</td> <td>•</td> <td>•</td> <td>_</td> <td>_</td> <td>_</td> <td></td>	CUTTING DECK COMBI 155X	967 97 86-01	•	•	_	_	_			
GRAMMER Primo M SEAT 967 00 84-01 • S 538 94 18-01 •	CUTTING DECK R180	967 98 56-01	_	Α	-	_	_	-		
GRAMMER PRIMO M SEAT, HEATED 967 00 84 02 • 538 94 18-02 • <t< td=""><td>CUTTING DECK R137</td><td>970 61 20-01</td><td>-</td><td>-</td><td>-</td><td>•</td><td>•</td><td>•</td></t<>	CUTTING DECK R137	970 61 20-01	-	-	-	•	•	•		
GRAWMER ARM REST NT. RIGHT 965 89 68-01 • S 965 89 68-01 • • • GRAMMER ARM REST NT. IFFT 965 89 70-01 • S 965 89 70-01 • -	GRAMMER PRIMO M SEAT	967 00 84-01	•	S	538 94 18-01	•	•	•		
GRAMMER ARM REST NT, LEFT 965 89 70-01 • S 965 89 70-01 • • • · RE TRACARDELS ANETY RELT FOR RETARCARDE SAFETY RELT FOR SYNDAM DESANT 576 78 34-01 • - <t< td=""><td>GRAMMER PRIMO M SEAT, HEATED</td><td>967 00 84-02</td><td>•</td><td>•</td><td>538 94 18-02</td><td>•</td><td>•</td><td>•</td></t<>	GRAMMER PRIMO M SEAT, HEATED	967 00 84-02	•	•	538 94 18-02	•	•	•		
RETRACTABLE SAFETY BELT FOR SYNAMAGE SAT 576 78 34 01 • - <	GRAMMER ARM REST KIT, RIGHT	965 89 68-01	•	S	965 89 68-01	•	•	•		
STANDARD SEAT 50/8 34-01 Image: standard sector se	GRAMMER ARM REST KIT, LEFT	965 89 70-01	•	S	965 89 70-01	•	•	•		
NOW PILADE SD2 NO 01 A A SD3 60 00 2.01 Image: Control of the c	STANDARD SEAT	576 78 34-01	•	•	_	_	_	_		
RUBBER BLADE (Fits snow bade 966 B 3 30-01) I I I S100 71-34 I I S100 71-34 I <thi< th=""> I <thi< th=""> <thi< th=""></thi<></thi<></thi<>	CENTRAL GREASE KIT	529 95 78-01	•	-	-	-	-			
If is show blade 966 83 30-01 Image: Control of the show blade 966 91 30-01 Image: Control of the show blade 966 91 30-01 Image: Control of the show blade 966 91 30-01 Image: Control of the show blade 966 91 30-01 Image: Control of the show blade 966 91 30-01 Image: Contro the show	SNOW BLADE	592 75 51-01	A	Α	536 90 02-01	•	•	•		
Initiation of the line		_	_	_	531 00 71-34	•	•	•		
FLAL MOWER 596 86 75-01 A A 536 90 00-01 Image: Constraint of the co	SNOW THROWER	590 45 19-01	A	Α	536 90 30-01	С	C	С		
FOLDABLE PLOUGH 965 99 72-01 A A 536 90 27-01 C C BROOM 590 45 00-01 A A 536 90 26-01 C C C GRAVEL HARROW 529 76 83-01 I I A 587 93 20-01 I	UTILITY BUCKET	965 99 74-01	Α	Α	_	_	_	_		
BROOM 590 45 00-01 A A 536 90 26-01 C C C GRAVEL HARROW 529 76 83-01 • • 587 93 20-01 • <t< td=""><td>FLAIL MOWER</td><td>596 86 75-01</td><td>Α</td><td>Α</td><td>536 90 00-01</td><td>•</td><td>•</td><td>•</td></t<>	FLAIL MOWER	596 86 75-01	Α	Α	536 90 00-01	•	•	•		
GRAVEL HARROW 529 76 83-01 • 587 93 20-01 •	FOLDABLE PLOUGH	965 99 72-01	A	A	536 90 27-01	С	С	С		
RAKE 536 90 31-01 F G E G 587 93 25-01 F G G F G G F G G F G G F G G F G G G G G G G </td <td>BROOM</td> <td>590 45 00-01</td> <td>A</td> <td>Α</td> <td>536 90 26-01</td> <td>С</td> <td>С</td> <td>С</td>	BROOM	590 45 00-01	A	Α	536 90 26-01	С	С	С		
BLOWER 587 93 29-01 • • - - - - - WEED BRUSH 597 75 08-01 A A - - - - - DROP SPREADER 536 90 35-01 F G F G - - - - - TRALER HOCK KIT 538 82 87-01 G G 536 90 31-01 G	GRAVEL HARROW	529 76 83-01	•	•	587 93 20-01	•	•	•		
WEED BRUSH 597 75 08-01 A A DROP SPREADER 536 90 35-01 F G TRAILER HOOK KIT 538 82 87-01 G 6 536 90 31-01 G G	RAKE	536 90 31-01	FG	FG	587 93 25-01	FG	FG	FG		
DROP SPREADER 536 90 35-01 F G F G - <td>BLOWER</td> <td>587 93 29-01</td> <td>•</td> <td>•</td> <td>-</td> <td>-</td> <td>-</td> <td>_</td>	BLOWER	587 93 29-01	•	•	-	-	-	_		
TRAILER HOOK KIT 538 82 87-01 G G 536 90 31-01 G G G ROTATING BEACON LIGHT (ROPS) 966 79 15-01 • • - - - - - POSITION & TURNING LIGHTS REAR KIT (GLOW) 966 79 09-01 B - <t< td=""><td>WEED BRUSH</td><td>597 75 08-01</td><td>Α</td><td>Α</td><td>-</td><td>-</td><td>-</td><td>-</td></t<>	WEED BRUSH	597 75 08-01	Α	Α	-	-	-	-		
ROTATING BEACON LIGHT (ROPS) 966 79 15-01 • • • - <td>DROP SPREADER</td> <td>536 90 35-01</td> <td>FG</td> <td>FG</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td>	DROP SPREADER	536 90 35-01	FG	FG	-	-	-	-		
POSITION & TURNING LIGHTS REAR 966 79 09-01 B -	TRAILER HOOK KIT	538 82 87-01	G	G	536 90 31-01	G	G	G		
KIT (GLOW) 966 79 09-01 B C <thc< th=""> <thc< th=""> C C</thc<></thc<>	ROTATING BEACON LIGHT (ROPS)	966 79 15-01	•	•	-	-	-	-		
POSITION AND TURNING LIGHTS FRONT 966 79 10-01 B D - - - - - - - NUMBER PLATE KIT, ROPS 529 95 67-01 B D B E - - - - - - ATTACHMENT 529 95 79-01 • • -	POSITION & TURNING LIGHTS REAR KIT (GLOW)	966 79 09-01	В	_	_	_	_	_		
NUMBER PLATE KIT, ROPS 529 95 67-01 B D B E ATTACHMENT 529 95 79-01 • • · A COUNTERWEIGHT 529 95 79-01 • • · B CONTROL BOX 966 79 08-01 • • · B CONTROL BOX 966 79 08-01 • • • · ·	LOW SPEED VEHICLE TRIANGLE	966 79 11-01	D	E	-	-	_	-		
ATTACHMENT A COUNTERWEIGHT 529 95 79-01 • • - - - - - B CONTROL BOX 966 79 08-01 • • - - - - - - C FRONT POWER OUTLET KIT - • • 537 63 59-01 • • • -<	POSITION AND TURNING LIGHTS FRONT	966 79 10-01	B D	-	_	_	_	_		
A COUNTERWEIGHT 529 95 79-01 • -	NUMBER PLATE KIT, ROPS	529 95 67-01	B D	BE	-	-	-	-		
B CONTROL BOX 966 79 08-01 • • - - - - C FRONT POWER OUTLET KIT - • • 537 63 59-01 • • • D POSITION & TURNING LIGHTS 966 79 09-01 • - - - - - D POSITION & TURNING LIGHTS 966 79 09-01 • - - - - - - D POSITION & TURNING LIGHTS 966 79 09-01 • -	ATTACHMENT									
C FRONT POWER OUTLET KIT - • • 537 63 59-01 •	A COUNTERWEIGHT	529 95 79-01	•	•	-	-	-	_		
D POSITION & TURNING LIGHTS 966 79 09-01 • -	B CONTROL BOX	966 79 08-01	•	•	-	-	-	-		
D REAR KIT. GLOW 966 79 09-01 • -<	C FRONT POWER OUTLET KIT	_	•	•	537 63 59-01	•	•	•		
E REAR KIT, LED 529 60 78-61 • </td <td></td> <td>966 79 09-01</td> <td>•</td> <td>-</td> <td>_</td> <td>-</td> <td>_</td> <td>_</td>		966 79 09-01	•	-	_	-	_	_		
		529 80 78-01	_	•	_			_		
G BRACKET 538 82 86-01 • 538 82 86-01 •	F REAR POWER OUTLET KIT	537 63 60-01	•	•	537 63 60-01	•	•	•		
	G BRACKET	538 82 86-01	•	•	538 82 86-01	•	•	•		

= Requires additional attachments and/or parts.

• Suitable O Not recommended — Not applicable S - Comes as standard

Visit: www.husqvarna.com/uk/prorideonfrontmowers/



TECHNICAL SPECIFICATIONS

FRONT MOWERS	P 524X EFi / P 524XR EFi	P 525DX / P 525DX WITH CABIN	P 535HX		
TECHNICAL SPECIFICATIONS					
Engine manufacturer	Kawasaki	Kubota™	Kubota™		
Engine name	FX730V EFI	D1105	D1105		
Net power at preset rpm, kW	15.6 @ 3000	18.7 @ 3000	17.8@ 3000		
Transmission type	Hydrostatic AWD	Hydrostatic AWD	Electric AWD		
Cylinder displacement, cm ³	726	1123	1123		
Cylinders	2	3	3		
Sound power level, guaranteed (LWA), dB(A) *	ТВС	105	105		
Sound pressure level at operator's ear, dB(A) **	ТВС	92	88		
Vibration level steering wheel, m/s ² ***	2	1.7	1.2		
Vibration level seat, m/s ² ***	0.3	0.7	0.1		
Engine cooling	Air	Liquid	Liquid		
Generator, A	20	40	40 (12 V) and 80 (48 V)		
Battery, V/Ah	12/24	12/62	12/62 (12V) and 52/40 (48V)		
Air filter type	Heavy-duty canister style	Heavy-duty canister style	Heavy-duty canister style		
Fuel tank volume, litre	22	25	23		
Oil tank volume (incl. oil filter), litre	2.1	3.3	3.3		
Transmission manufacturer	Kanzaki	Kanzaki	Benevelli		
Transmission model	KTM 23	KTM 23	TX2		
Speed forward, min – max, km/h	0-13	0-18	0-19.5		
Speed reverse, min – max, km/h	0-9	0-11	0-11		
Uncut circle, cm	50	58	58		
Optional cutting decks	Combi 112 / 122 / R137	Combi 132 / 132X / 155 / 155X	Combi 132 / 132X / 155 / 155X / R 180		
Blade engagement	Electric clutch	Electric clutch	Electric clutch		
Frame construction type	Ladder frame	Ladder frame	Ladder frame		
Seat type	Premium	Full suspension	Full suspension		
Tyre size front, inch	18×8.5-8	20×10-10	20×10-10		
Tyre size rear, inch	18×8.5-8	20×10-10	20×10-10		
Wheelbase. cm	100	106	106		
Ground clearance, mm	105	140	134		
Base machine length, cm	205	211/227	209		
Base machine width, cm	98	114/125.5	116		
Base machine height, cm	ROPS up 185, ROPS down 123	ROPS up 203, ROPS down 133, Cabin 201	ROPS up 204, ROPS down 134		
Weight (excluding cutting deck), kg	TBC	665/907	790		
FEATURES					
Power steering	•	•	•		
All-Wheel Drive (AWD)	•	•	•		
Oil cooler	•	•	•		
Hydraulic equipment lift	_	•	•		
Service position	•	•	•		
Hinged armrests	•	•	•		
Digital hour meter	•	•	•		
12V outlet	•	•	•		
ROPS	•	•/-	•		
Integrated connectivity	•	•	•		
High contrast segment display	•	•	_		
Hydraulic attachment kit	_	•	•		
Cup holder	•	-	_		
Dynamic graphic display	_	_	•		
Hybrid driveline	_	_	•		
			-		

•= Available -= Not available **Noise emissions in the environment measured and calculated as guaranteed sound power level according to EC-Directive 2000/14/EC. The guaranteed sound power level includes variation in production as well as variation from the test code with 1–2 dB(A). Noise emissions and sound pressure level can be influenced by the cutting deck used. Declared figures are for the machine equipped with the most used cutting unit for the specific mower model. For further information, see the Operator's manual. **Sound pressure level according to EN ISO 5395-1. Reported data for sound pressure level has a typical statistical dispersion (standard deviation) of 12 dB(A). ***Vibration level according to EN ISO 5395-1. Reported data for sound pressure level has a typical statistical dispersion of 0.2 m/s² (seering wheel) and 0.8 m/s² (seat).



MASTERDASTERDASTERDASTERDASTERDASTERDASTERDASTER

A wide range of attachments and choice of several cutting methods give our garden tractors excellent versatility. Ideal for efficient lawn care and various tasks around your land. Choose between three different cutting systems for lawn care then fit a trailer, spreader, snow thrower and more for greater versatility.





WHAT YOU GET **AND HOW WE DO IT**

You can expect excellent results from our top-segment tractors, featuring top-class steering technology. Less vibration, minimised uncut areas and improved manoeuvrability.

The pedal-operated hydrostatic transmission ensures easy speed and direction control. Separate pedals for forward and





FIRST CLASS CUTTING

FEWER UNCUT AREAS

EASY PEDAL OPERATION

reverse.

The reinforced and powder-coated cutting decks give improved durability and corrosion resistance.

COMFORTABLE OPERATION

Change from collecting to mulching mode with a lever on the dashboard, without leaving the seat. The blade rotation is engaged and disengaged by an electric switch.





ALL YEAR ROUND USE

A wide range of attachments and a built-in choice of several cutting methods make our tractors truly versatile and useful all-year-round.









Electric blade engagement simply pull the switch on the control panel

Powerful and durable



Premium seat with armrests for maximum comfort

Cruise control allows the tractor to maintain consistent speed, even in rough terrain



The seat platform automatically changes height as seat is moved to optimise operator's position

The large and low vibration, 108cm collection deck offers improved cut quality



Pivoting, heavy-duty cast front axle ensures excellent balance and driving comfort

Not all features shown are available on all models.

H



GARDEN TRACTORS





MULCHING OPTIONS

Frequently mowed lawns can be fertilised the natural way with the BioClip® function, which is available as standard on the larger TC models. It's also available as an accessory for the 100 series TC models and all TS models. In addition, collectors are available as an accessory for the TS models, while the TC models can be converted to rear ejection by an accessory kit. So you really can't go wrong as long as you choose Husqvarna!



SIZE AND SPECIFICATION

If you're buying your first tractor and have a smaller or mid-sized garden, our user-friendly 100 series is a good choice. Equipped with chokeless start for easy starting and pedal-operated automatic transmission, these compact tractors offer easy and safe operation, making them ideal for beginners.

For a mid-sized or larger garden, you'll need more capacity and comfort. Our 200 series are well-equipped tractors with tight turning radius,



EJECTION OR COLLECTOR

If you mostly cut large areas with long-grown grass, a tractor with side ejection (TS models) is the most suitable choice. If you prefer a tidy cutting result and want to collect grass clippings, leaves and other debris, we recommend a tractor with integrated collector (TC models).



reinforced cutting decks and electric blade engagement to enable excellent manoeuvrability, easier and more efficient mowing with less uncut areas.

If you use your tractor more frequently – even all-year-round – or will be mowing larger areas, you'll appreciate our TS 146TXD. A powerful and well equipped tractor with convenient features to guarantee a superb result. A wide range of attachments and a built-in choice of several cutting methods, give this large capacity excellent usability all-year-round.



PRODUCT USE GUIDE

Use this guide to help you select the best product for your needs.

							CUTT	ING SYSTER	N	
TYPE OF USE	MODEL	ENGINE TYPE (NO. OF CYLINDERS)	CUTTING WIDTH	OVERALL MACHINE WIDTH	OVERALL MACHINE LENGTH	DRIVE SYSTEM	COLLECTION	EJECT	MULCH	
	TS 112	Single	95cm	TBC	TBC	Hydrostatic	0	•	ο	
	TS 114	Single	95cm	TBC	ТВС	Hydrostatic	o	٠	ο	
	TC 112	Single	95cm	TBC	TBC	Hydrostatic	•	ο	ο	
OCCASIONAL USE (DOMESTIC / LANDOWNER)	TC 114	Single	95cm	TBC	TBC	Hydrostatic	•	0	ο	
	TS 138	Single	97cm	102cm / 127cm*	176cm	Hydrostatic	0	٠	ο	
	TC 138	Single	97cm	102cm	240cm	Hydrostatic	•	ο	ο	
	TS 142T	V-Twin	107cm	112cm / 124cm*	175cm	Hydrostatic	0	•	ο	
	TS 146TXD	V-Twin	117cm	122cm / 145cm*	175cm	Hydrostatic	0	•	ο	
DEMANDING OCCASIONAL USE (DOMESTIC / LANDOWNER)	TC 238TX	V-Twin	97cm	102cm	252cm	Hydrostatic	•	ο	•	
	TC 242T	V-Twin	107cm	112cm	252cm	Hydrostatic	•	ο	ο	
	TC 242TX	V-Twin	107cm	112cm	252cm	Hydrostatic	•	0	•	

The product selector is only to be used as a guide. Please visit your local Authorised Husqvarna dealer for more information.

• Requires additional accessory to be able to perform the function. Please see indicated page for more information.

* - With the ejection chute down

NOTE: Overall machine dimensions are approximate and to be used as a guide only. Husqvarna reserve the right to change specification detail without prior notice.

	RECOMMENDE	D LAWN AREA	ALL YEAR F				
SMALL	MEDIUM	MEDIUM / LARGE	LARGE	FRONT MOUNT	TRAILED	PAGE	
				ACCESSORIES	ACCESSORIES		
•	•			•	•	230	
•	•			•	•	230	
•	•			•	•	231	
•	•			•	•	231	
•	•			•	•	232	
•	•			•	•	232	
	•	•		•	•	233	
		•	•	•	•	234	
•	•	•		•	•	234	
	•	•		•	•	235	
	•	•	•	•	•	235	



OCCASIONAL USE



語、テート語

5

Easy to use side eject and rear collect tractors designed for demanding domestic all-year use in smaller to medium-sized areas. Features include Air Induction™ cutting decks for excellent cutting and collection performance and pedal operated transmissions for maximum control.

Ideal for applications including:

- Demanding domestic use
- Smaller to medium sized areas
- All year round use



Garden tractor with intuitive operation and exceptional cutting results for large open lawns.

- Side Eject (BioClip® optional)
- Dual Pedal Drive
- Dual Headlights
 - Juai neadiiginta
- Ergonomic Driving Position
 Manual Blade Enagagement
- Side Discharge Cutting Deck
- Engine
 Engine size / Power

 Husqvarna HS 413AE
 413cm³ / 8.4kW

 Model
 Order PNC

 TS 112
 970 62 24-01

 Grass collector
 538 89 92-01

 BioClip® plate
 538 89 88-01
- r Transmission Cutting width Hydrostatic 95cm RRP ex VAT RRP inc VAT

NEW

TS 114



Garden tractor with intuitive operation and exceptional cutting results for large open lawns.

- Side Eject (BioClip® optional)
- Dual Pedal Drive
- Dual Headlights
- Ergonomic Driving Position
- Manual Blade Enagagement
 - Side Discharge Cutting Deck

Engine	Engine size / Power	Transmission	Cutting width
Husqvarna HS 452AE	452cm ³ / 8.4kW	Hydrostatic	95cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
TS 114	970 62 25-01		
Grass collector	538 89 92-01		
BioClip [®] plate	538 89 88-01		



NEW



Garden tractor with collection bag with an optimised bagging capacity, store in less space thanks to a compact design and enjoy the possibilities with its tow hook and range of compatible attachments.

- Rear collect (BioClip® optional)
- Dual Pedal Drive

TC 112

- 200 litre collector Manual Blade Enagagement
- Dual Headlights
- Collection Bag

Engine	Engine size / Power	Transmission	Cutting width
Husqvarna HS 413AE	413cm ³ / 8.4kW	Hydrostatic	95cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
TC 112	970 62 22-01		
BioClip® plug	538 89 89-01		
Discharge deflector	538 89 93-01		

GRASS COLLECTORS



95cm and 97cm cutting width 2 bin collector with removable bins for easy emptying of grass clippings. 210 litre capacity. 107cm cutting width 3 bin collector with removable bins for easy emptying of grass clippings. 315 litre capacity.

Fits to	Order PNC
95cm TS models	538 89 92-01
97cm TS models	960 73 00-22
107cm TS models	960 73 00-38

REPLACEMENT BLADES

Model	TS 112 / TS 114	TC 112 / TC 114
Blade type	Combi x 2	Collection x 2
PNC	537 67 44-10	537 67 40-10 (LH)
PNC		537 67 41-10 (RH)





Garden tractor with collection bag with an optimised bagging capacity, store in less space thanks to a compact design and enjoy the possibilities with its tow hook and range of compatible attachments.

- Rear collect (BioClip® optional)
- Dual Pedal Drive
- 250 litre collector Manual Blade Enagagement
- Dual Headlights
- Manual Blade Enagage
 Collection Bag

Engine	Engine size / Power	Transmission	Cutting width
Husqvarna HS 452AE	452cm ³ / 8.4kW	Hydrostatic	95cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
TC 114	970 62 23-01		
BioClip® plug	538 89 89-01		
Discharge deflector	538 89 93-01		

Locate your nearest dealer

Visit: www.husqvarna.com/uk/dealer-locator

LOOKING FOR MORE FREE TIME?

Husqvarna Automower[®]. Find out more on page 156



SHARE your stories and photos on your Facebook, Instagram and Twitter by tagging us.

HusqvarnaUK
 UK_Husqvarna
 HusqvarnaUK



OCCASIONAL USE



Easy to use side eject and rear collect tractors designed for demanding domestic all-year use in smaller to medium-sized areas. Features include Air Induction[™] cutting decks for excellent cutting and collection performance and pedal operated transmissions for maximum control.

Ideal for applications including:

- Demanding domestic use
- Smaller to medium sized areas
- All year round use





User-friendly tractor with side ejection and powerful Husqvarna Series engine. Converts easily to BioClip® or collection with optional accessories.

- Side Eject (BioClip® optional)
- Air Induction deck[™]
 - deck....

960 71 00-03

- Optional collector Chokeless start
- Medium back seat
- Transmission Cutting width Engine Engine size / Power Husqvarna Series 500cm³ / 8.6kW Hydrostatic 97cm Order PNC RRP ex VAT RRP inc VAT Model TS 138 960 41 04-54 Grass collector 960 73 00-22

TC 138

BioClip® plate

UPDATED



User-friendly tractor with integrated rear collection and powerful Husqvarna Series engine. Converts easily to BioClip® or rear discharge with optional accessories.

- Rear collect (BioClip[®] optional)
 Air Induction deck[™]
- 220 litre collector
- Medium back seat

Engine	Engine size / Power	Transmission	Cutting width
Husqvarna Series	500cm ³ / 8.6kW	Hydrostatic	97cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
TC 138	960 51 02-00		
BioClip® plug	960 71 00-38		
Discharge deflector	960 71 00-41		



TS 142T



High capacity tractor with side ejection and powerful Husgvarna Series V-Twin engine. Converts easily to BioClip® or collection with optional accessories.

- Side Eject (BioClip® optional)
- Optional collector
- Air Induction deck[™]
- Chokeless start
- Medium back seat

Engine	Engine size / Power	Transmission	Cutting width
Endurance V-Twin	656cm ³ / 11.1kW	Hydrostatic	107cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
TS 142T	960 41 04-32		
Grass collector	960 73 00-38		
BioClip® Kit	960 71 00-06		

GRASS COLLECTORS



97cm cutting width 2 bin collector with removable bins for easy emptying of grass clippings. 210 litre capacity. 107cm cutting width 3 bin collector with removable bins for easy emptying of grass clippings. 315 litre capacity.

Fits to	Order PNC
97cm TS models	960 73 00-22
107cm TS models	960 73 00-38

REPLACEMENT BLADES

Model	TS 138	TS 142T / TX	TC 138
Blade type	Combi x 2	Combi x 2	Collection x 2
PNC	581 11 63-02	532 13 89-71	532 42 79-84 (LH)
PNC			532 42 79-85 (RH)

TS 142TX



Premium mid-range tractor with side ejection. Features powerful V-twin engine for maximum capacity on less frequently cut areas.

- Side Eject (BioClip® optional)
- Optional collector
- Air Induction deck[™] • High back seat
- Turn key start

Engine	Engine size / Power	Transmission	Cutting width
Endurance V-Twin	656cm ³ / 11.1kW	Hydrostatic	107cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
TS 142TX	960 41 04-34		
Grass collector	960 73 00-38		
BioClip® Kit	960 71 00-06		

Locate your nearest dealer \bigcirc Visit: www.husqvarna.com/uk/dealer-locator

LOOKING FOR MORE FREE TIME?

Husqvarna Automower[®]. Find out more on page 156



SHARE your stories and photos on your Facebook, Instagram and Twitter by tagging us.

(f **HusqvarnaUK UK_Husqvarna HusqvarnaUK**

<u>.</u>



DEMANDING / FREQUENT USE



Powerful V-twin side eject and rear collect tractors for efficient all-year use in medium to large-sized areas. The tractors are ideally suited to demanding domestic and landowner use. Features include Air Induction[™] cutting decks for excellent cutting and collection performance, pedal operated transmissions for maximum control and reinforced cutting decks for improved durability. All models feature electric blade engagement.

Ideal for applications including:

- Demanding domestic use
- Landowner use
- Medium to large areas
- All year round use

TS 146TXD



High-capacity tractor with side ejection. Powerful V-Twin engine for efficient all year round use. Converts easily to BioClip® or collection with optional accessories.

- Side Eject (BioClip® optional)
- Air Induction deck[™]
- · High back seat
- · Optional collector • Turn key start
- Automatic differential lock

Cutting width

117cm

RRP inc VAT

- Engine Endurance V-Twin Model TS 146TXD Grass collector 960 71 00-19 BioClip® Kit
- Engine size / Power Transmission 656cm³ / 11.1kW Hydrostatic RRP ex VAT Order PNC 960 41 04-36 960 73 00-37

TC 238TX



Premium mid range tractor with integrated rear collection, powerful V-Twin engine and excellent manoeuvrability. Features BioClip from seat and large capacity collector.

- Rear collect / BioClip®
- Air Induction deck[™] • Tube bumper
- Turn key start
 - · High back seat

• 320 litre collector

Engine	Engine size / Power	Transmission	Cutting width
Endurance V-Twin	656cm ³ / 11.1kW	Hydrostatic	97cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
TC 238TX	960 51 01-92		
BioClip® plug	960 71 00-38		
Discharge deflector	960 71 00-41		



TC 242T



High capacity tractor with integrated rear collection and powerful Husqvarna Series V-twin engine. Converts easily to BioClip® or rear discharge with optional accessories.

- Rear collect (BioClip® optional)
 320 litre collector Air Induction deck[™]
- Chokeless start
- High back seat

Engine	Engine size / Power	Transmission	Cutting width
Intek V-Twin	656cm ³ / 11.1kW	Hydrostatic	108cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
TC 242T	960 51 01-91		
BioClip® plug	960 71 00-38		
Discharge deflector	960 71 00-41		

GRASS COLLECTORS



3 bin collector with removable bins for easy emptying of grass clippings. 315 litre capacity.

Fits to	Order PNC
TS 146TXD	960 73 00-37

REPLACEMENT BLADES

Model	TC 238TX	TC 242T / TX
Blade type	Collection x 2	Collection x 2
PNC	532 42 79-85 (RH)	594 02 48-02 (RH)
PNC	532 42 79-84 (LH)	594 02 47-02 (LH)

REPLACEMENT BLADES

Model	TS 146XD
Blade type	Combi x 2
PNC	532 40 53-80

TC 242TX





Husqvarna Automower[®]. Find out more on page 156



SHARE your stories and photos on your Facebook, Instagram and Twitter by tagging us.

(**f HusqvarnaUK UK_Husqvarna HusqvarnaUK O**

20

Powerful premium tractor with integrated rear collection. Features new 108cm high performance deck, BioClip adjustable from seat and excellent manoeuvrability.

• Rear collect / BioClip®

- Air Induction deck[™]
- Tube bumper
- LED Headlights · High back seat

• 320 litre collector

Engine	Engine size / Power	Transmission	Cutting width
Kawasaki FR V-Twin	726cm³ / 16.0kW	Hydrostatic	108cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
TC 242TX	960 51 01-93		
BioClip® plug	960 71 00-38		
Discharge deflector	960 71 00-41		

(Instagram: HusqvarnaUK



GARDEN TRACTOR ACCESSORIES



The perfect lawn requires more than simply cutting. Additional maintenance is needed for optimum health and appearance. Towed accessories are an efficient way of getting excellent results with ease. The comprehensive range of accessories also enables true year round use, making maximum use of your investment.

95 cm COLLECTOR



2 bin collector with removeable bins for easy emptying of grass clippings. 210 litre capacity.

Fits to	Order PNC
95cm TS models	538 89 92-01
RRP ex VAT	RRP inc VAT

107 cm COLLECTOR



3 bin collector with removeable bins for easy emptying of grass clippings. 315 litre capacity.

Fits to	Order PNC
107cm TS models	960 73 00-38
RRP ex VAT	RRP inc VAT

TRACTOR COVER



Tailored tractor cover made from water resistant nylon with adjustable drawstring and ventilation holes.

Fits to	Order PNC
All other models	505 63 08-82
RRP ex VAT	RRP inc VAT

XS800 CHARGER



Charges all 12 V lead-acid batteries from 1.2–32Ah and is suitable for maintenance charging up to 100Ah.

Fits to	Order PNC
All models	579 45 01-03
RRP ex VAT	RRP inc VAT

97 cm COLLECTOR



2 bin collector with removeable bins for easy emptying of grass clippings. 210 litre capacity.

Fits to	Order PNC
97cm TS models	960 73 00-22
RRP ex VAT	RRP inc VAT

117 cm COLLECTOR



3 bin collector with removeable bins for easy emptying of grass clippings. 315 litre capacity.

Fits to	Order PNC
117cm TS models	960 73 00-37
RRP ex VAT	RRP inc VAT

TRACTOR COVER FOR TS 138



Tailored tractor cover made from water resistant nylon with adjustable drawstring and ventilation holes.

Fits to	Order PNC
TS 138	505 63 08-80
RRP ex VAT	RRP inc VAT

GRAVEL HARROW

Sturdy harrow with rubber wheels.

Fits to

All models RRP ex VAT

DETHATCHER

Has spring tines that fold when you reverse. Working width 110 cm.

Order PNC 953 51 24-01

RRP inc VAT



TRAILER 275



Folding tailgate for easy loading and unloading. Loading dimensions (L \times W \times H): 125 \times 83 \times 31cm. Load capacity 225kg

Fits to	Order PNC
All models	501 00 82-01
RRP ex VAT	RRP inc VAT

ATTACHMENT PLATFORM



Attachment platform for aerator, plug aerator and dethatcher. Attachments are easily changed without tools.

Fits to	Order PNC
All models	586 63 72-01
RRP ex VAT	RRP inc VAT

SNOW BLADE



Blade with protective spring. Use with counterweight. Requires rubber strip 966 00 19-01. Working width 122 cm.

Fits to	Order PNC
All models	544 92 17-01
RRP ex VAT	RRP inc VAT

LOADING RAMPS - 150CM



Curved ramps designed for loading of tractors, corrosion resistant aluminium with anti-slip surface. 20cm wide and 150cm long.

Fits to	Order PNC
Up to 450kg	505 69 90-41
RRP ex VAT	RRP inc VAT



ROLLER

Fill with water or sand to add weight. For levelling ground or consolidating newly sown seed. Working width 91cm

Fits to	Order PNC
All models	965 89 94-01
RRP ex VAT	RRP inc VAT

Allows air, water and nutrients to

reach the soil. Rustproof blades.

COUNTERWEIGHT

Rear counterweight for increased grip, to

be used with snow blower and snow blade.

LOADING RAMPS - 200CM

Curved ramps designed for loading of

Fits to Up to 450kg

RRP ex VAT

tractors, corrosion resistant aluminium with

anti-slip surface. 20cm wide and 200cm long.

Order PNC

505 69 90-43

RRP inc VAT

Weight 25kg. TS version 505 54 92-01

Fits to

TC Models

RRP ex VAT

Order PNC

586 63 69-01

RRP inc VAT

Order PNC

580 38 97-01

RRP inc VAT

Requires platform. Fits to

Attachment platform

RRP ex VAT

AERATOR

SPREADER 75



Ideal for applying seed, fertiliser or salt. Spreading width of 300 – 360 cm. Capacity of 70kg. Adjustable flow.


Fits to	Order PNC
All models	967 02 72-01
RRP ex VAT	RRP inc VAT

PLUG AERATOR



Creates ground plugs which allow air, water and nutrients to reach the soil. Knives are rustproof. Requires platform.

Fits to	Order PNC	
Attachment platform	588 21 27-01	Attach
RRP ex VAT	RRP inc VAT	R



The spring tines are heat-treated for extra durability. Requires platform.

der PNC	Fits to	Order PNC
3 21 27-01	Attachment platform	586 63 68-01
P inc VAT	RRP ex VAT	RRP inc VAT



Visit: www.husqvarna.com/uk/dealer-locator

HUSQVARNA RECOMMEND

Power 4 Fuel. Pages 312 - 313







TECHNICAL SPECIFICATIONS

OOO OOO ●●● Husqvarna HS 413AE TBC Pressure with oil filter	OOO ●OO ●●O Husqvarna HS 452AE	OOO OOO ●●● Briggs & Stratton	000 ●00 ●●●	000 000	••• •••
OOO ●●● Husqvarna HS 413AE TBC Pressure with oil	●OO ●●● Husqvarna HS 452AE	000 ●●● ●●0	•00 •••	00	•••
●●● ●●O Husqvarna HS 413AE TBC Pressure with oil	●●● ●●O Husqvarna HS 452AE		•••		
●●O Husqvarna HS 413AE TBC Pressure with oil	●●O Husqvarna HS 452AE	••0		•••	
Husqvarna HS 413AE TBC Pressure with oil	Husqvarna HS 452AE		●●0		
HS 413AE TBC Pressure with oil	HS 452AE	Briggs & Stratton		••0	•00
HS 413AE TBC Pressure with oil	HS 452AE	Briggs & Stratton			
TBC Pressure with oil	· · ·		Briggs & Stratton	Briggs & Stratton	Briggs & Strattor
Pressure with oil	TDC	Intek	Endurance Series V-Twin	Endurance Series V-Twin	Endurance Series V-Twin
	TBC	8.6@2600	11.1@2600	11.1@2600	11.1@2600
nitor	Pressure with oil filter	Pressure with oil filter	Full pressure with oil filter	Full pressure with oil filter	Full pressure with oil filter
6	6	5.7	5.7	11.4	15.0
Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic with automatic differential lock
TBC	TBC	100	100	100	100
TBC	TBC	85	84	85	84
Pedal-operated	Pedal-operated	Pedal-operated	Pedal-operated	Pedal-operated	Pedal-operated
Collection / Mulching / Side discharge	Collection / Mulching / Side discharge	Collection/ Mulching/ Side discharge	Collection/ Mulching/ Side discharge	Collection / Mulching / Side discharge	Collection / Mulching / Side discharge
95/37	95 / 37	97/38	107/42	107/42	117/46
TBC	TBC	40	40	40	40
30 - 100	30 - 100	38-102	38-102	38-102	38-102
Stamped	Stamped	Stamped	Stamped	Stamped, reinforced	Stamped, reinforced
2	2	—	2	4	4
Manual, Lever	Electric	Manual	Manual	Electric clutch	Electric clutch
	Medium	Medium	Medium	High	High
					15×6-6
					20×10-8
-					108
					175
-					145
TBC	TBC	165	200	180	200
•	•	•	•	-	•
•	•	•	•	•	•
_	-	-	•	•	•
•	•	•	•	•	•
_	-	-	_	-	_
_	-	-	_	•	•
_	_	-	_	-	•
•	•	•	•	•	•
-	-	-	_	_	_
•	•	•	•	•	•
_	-	-	_	_	_
•	•	•	•	•	•
•	•	•	•	•	•
-	-	_	_	•	•
_	-	_	_	•	•
_	-	_	_	•	•
					(•)
		. ,		· · /	(•) _
	_	_			
					(•)
	TBC Pedal-operated Collection / Mulching / Side discharge 95 / 37 TBC 30 - 100 Stamped 2 Manual, Lever Medium 15 × 6 -6 18 × 8.5-8 TBC TBC TBC TBC TBC - <tr td=""></tr>	TBC TBC Pedal-operated Pedal-operated Collection / Mulching / Side discharge 95 / 37 95 / 37 95 / 37 TBC TBC 30 - 100 30 - 100 Stamped Stamped 2 2 Manual, Lever Electric Medium Medium 15 × 6 -6 15 × 6 -6 18 × 8.5-8 18 × 8.5-8 TBC TBC TBC	TBC TBC Refal-operated Pedal-operated Pedal-operated Pedal-operated Collection / Mulching / Side discharge Collection / Mulching / Side discharge Collection / Mulching / Side discharge 95 / 37 95 / 37 97 / 38 TBC TBC 40 30 - 100 30 - 100 38 - 102 Stamped Stamped Stamped 2 2 - Manual, Lever Electric Manual Medium Medium Medium 15 × 6 -6 15 × 6 -6 15 × 6 -6 18 × 8.5 - 8 18 × 8.5 - 8 18 × 8.5 - 8 TBC TBC 101.6 TBC TBC 175.3 TBC TBC 127 TBC TBC 165 - - - - 0 0 - - - - - - 0 0 - - - - - - <t< td=""><td>TBC TBC 85 84 Pedal-operated Pedal-operated Pedal-operated Pedal-operated Collection / Mulching / Side discharge Collection / Mulching / Side discharge Collection / Mulching / Side discharge Collection / Mulching / Side discharge 95 / 37 95 / 37 97/38 107/42 TBC TBC 40 40 30 - 100 30 - 100 38 - 102 38 - 102 Stamped Stamped Stamped Stamped 2 2 - 2 Manual Lever Electric Manual Manual Medium Medium Medium Medium 15 × 6 - 6 15 × 6 - 6 15 × 6 - 6 15 × 6 - 6 18 × 85-8 18 × 85-8 18 × 85-8 20 × 8 - 8 TBC TBC 101.6 108 TBC TBC 124 TBC TBC TBC 124 TBC - - - - - - - - <td< td=""><td>TBC TBC 85 84 85 Pedal-operated Pedal-operated Pedal-operated Pedal-operated Pedal-operated Collection / Mulching / Side discharge Collection / Side discharge Collection / Mulching / Side discharge 95 / 37 97/38 107/42 107/42 107/42 BC TBC 40 40 40 30 - 100 30 - 100 38 - 102 38 - 102 38 - 102 Stamped Stamped Stamped Stamped Stamped Stamped Stamped Stamped Stamped Stamped 15 × 6 - 6 15 × 6 - 6 15 × 6 - 6 15 × 6 - 6 15 × 6 - 6 18 × 85 - 8 18 × 85 - 8 18 × 85 - 8 108 108 108 TBC TBC 175.3 175 175 175 TBC TBC 16 0 0</td></td<></td></t<>	TBC TBC 85 84 Pedal-operated Pedal-operated Pedal-operated Pedal-operated Collection / Mulching / Side discharge Collection / Mulching / Side discharge Collection / Mulching / Side discharge Collection / Mulching / Side discharge 95 / 37 95 / 37 97/38 107/42 TBC TBC 40 40 30 - 100 30 - 100 38 - 102 38 - 102 Stamped Stamped Stamped Stamped 2 2 - 2 Manual Lever Electric Manual Manual Medium Medium Medium Medium 15 × 6 - 6 15 × 6 - 6 15 × 6 - 6 15 × 6 - 6 18 × 85-8 18 × 85-8 18 × 85-8 20 × 8 - 8 TBC TBC 101.6 108 TBC TBC 124 TBC TBC TBC 124 TBC - - - - - - - - <td< td=""><td>TBC TBC 85 84 85 Pedal-operated Pedal-operated Pedal-operated Pedal-operated Pedal-operated Collection / Mulching / Side discharge Collection / Side discharge Collection / Mulching / Side discharge 95 / 37 97/38 107/42 107/42 107/42 BC TBC 40 40 40 30 - 100 30 - 100 38 - 102 38 - 102 38 - 102 Stamped Stamped Stamped Stamped Stamped Stamped Stamped Stamped Stamped Stamped 15 × 6 - 6 15 × 6 - 6 15 × 6 - 6 15 × 6 - 6 15 × 6 - 6 18 × 85 - 8 18 × 85 - 8 18 × 85 - 8 108 108 108 TBC TBC 175.3 175 175 175 TBC TBC 16 0 0</td></td<>	TBC TBC 85 84 85 Pedal-operated Pedal-operated Pedal-operated Pedal-operated Pedal-operated Collection / Mulching / Side discharge Collection / Side discharge Collection / Mulching / Side discharge 95 / 37 97/38 107/42 107/42 107/42 BC TBC 40 40 40 30 - 100 30 - 100 38 - 102 38 - 102 38 - 102 Stamped Stamped Stamped Stamped Stamped Stamped Stamped Stamped Stamped Stamped 15 × 6 - 6 15 × 6 - 6 15 × 6 - 6 15 × 6 - 6 15 × 6 - 6 18 × 85 - 8 18 × 85 - 8 18 × 85 - 8 108 108 108 TBC TBC 175.3 175 175 175 TBC TBC 16 0 0

● = Available (●) = Accessory - = Not available

*Noise emissions in the environment measured and calculated as guaranteed sound power level according to EC-Directive 2000/14/EC. The guaranteed sound power level includes variation in production as well as variation from the test code with 1–2 dB(A). **Sound pressure level according to ISO 5395 an EN 836. Reported data for sound pressure level has a typical statistical dispersion (standard deviation) of 1.2 dB(A). Noise emissions and sound pressure level can be influenced by the cutting unit used. Declared figures are for the machine equipped with the most used cutting unit for the specific mower model. ***Vibration level according to ISO 5395 and EN 836. Reported data for vibration has a typical statistical dispersion of 0.2 m/s² (steering wheel) and 0.8 m/s² (seat). ****Measured on trim side turn.



Garden tractors with integrated collection	TC 112	TC 114	TC 138	TC 238TX	TC 242T	TC 242TX
RECOMMENDATION CHART						
Large-sized residential gardens / landowner areas	000	000	000	000	000	•••
Medium / large-sized residential gardens	● 00	00	●00	● 00	•••	•••
Small / medium-sized residential gardens	•••	•••	•••	•••	••0	••0
Small-sized residential gardens	••0	••0	••0	••0	•00	00
TECHNICAL SPECIFICATIONS						
Engine manufacturer	Husqvarna	Husqvarna	Briggs & Stratton	Briggs & Stratton	Briggs & Stratton	Kawasaki
Engine name	HS 413AE	HS 452AE	Intek	Endurance Series V-Twin	Intek	FR Series
Net power at preset rpm, kW	ТВС	ТВС	8.6 @ 2600	11.1@2600	11.1@2600	16.0@2600
Engine lubrication type	Pressure with oil filter	Pressure with oil filter	Pressure with oil filter	Full pressure with oil filter	Full pressure with oil filter	Full pressure with oil filter
Fuel tank volume, litres	6	6	5.7	13.3	9.5	13.3
Transmission type	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Sound power level, guaranteed (LWA), dB(A)*	TBC	TBC	100	100	100	100
Sound pressure level at operators ear, dB(A)**	TBC	ТВС	85	84	84	85
Drive method	Pedal-operated	Pedal-operated	Lever-operated	Pedal-operated	Pedal-operated	Pedal-operated
Cutting methods	Collection / Mulching	Collection / Mulching	Collection/ Mulching	Collection/ Mulching	Collection/ Mulching	Collection/ Mulching
Cutting width, cm/inch	95 / 37	95 / 37	97/38	97/38	108/42	108/42
Turning radius, cm****	TBC	TBC	40	40	40	40
Cutting height, min-max, mm	30 - 100	30 - 100	38-102	38-102	38-102	38-102
Cutting deck type	Stamped	Stamped	Stamped	Stamped, Reinforced	Stamped, Reinforced	Stamped, Reinforced
Anti-scalp wheels	2	2	2	2	2	4
Blade engagement	Manual, Lever	Electric	Manual	Electric clutch	Manual	Electric clutch
Collector volume. litres	200	250	220	320	320	320
Seat back height	Medium	Medium	Medium	High	High	High
Tyre size, front, inch	15 × 6 -6	15 × 6 -6	15×6-6	15×6-6	15×6-6	15×6-6
Tyre size, rear, inch	18 × 8.5-8	18 × 8.5-8	18×8.5-8	18×9.5-8	18×8.5-8	18×9.5-8
Base machine, height, cm	TBC	TBC	102	102	TBC	107
Base machine, length, cm	TBC	TBC	240	252	252	252
Base machine, width, cm	TBC	TBC	102	102	110	110
Weight, kg	211	200	211	200	200	200
FEATURES	211	200	~ 1 1	200	200	200
Adjustable sliding seat	•	•	•	•	•	•
Augustable sliding seat	•	•	•	•	•	•
Cast front axle	-	-	•	•	•	•
Chokeless start	•	•	-	•	•	•
Cruise control	-	-	_	• _	_	•
Fender-mounted cutting height adjustment	•	•	•	•	•	•
Full collector indicator	•	•	•	•	•	•
Headlights	•	•	•	-	•	-
Headlights, LED	-	-	-	•	-	•
Hour meter with service minder	-	-	-		-	
	•	•	•	•	•	•
Pedal-operated hydrostatic transmission	•	•	•	•	•	•
Visible fuel level		-				_
CUTTING SYSTEMS						_
Collector	•	•	•	•	•	•
Deflector BioClip® from seat	(•)	(•)	(●)	(•)	(•)	(•)
				•		•

NOMINAL POWER A new machinery directive (2006/42/EC) came into force on January 1. 2010, requiring manufacturers to declare the nominal power of engines, in kilowatts (kW). The power rating of the engines indicated is the average net power output during a normal working situations and meets applicable noise regulations (at specified rpm, see owner manual) of a typical production engine for the engine model measured to SAE standard J 1349/ISO 1585. Mass production engines may differ from this value. Actual power output for the engine installed in the final machine will depend on the operating speed, environmental conditions and other variables.







Whether you're using them at work or at home, Husqvarna zero turn mowers get your work done quickly and efficiently. A zero turning radius means no grass is left uncut when you reach the end of a mowing row and make a 180° turn to start the next row. Designed specifically to endure tough working conditions, we've included top ergonomic features and comfortable operator functions to focus on meticulous cutting results.

ð≟





WHAT YOU GET AND HOW WE DO IT





COMFORTABLE OPERATION

PRECISE MANOEUVRING

systems provide precise manoeuvring.

Large wheels, comfortable seat, excellent overview and conveniently located controls provide a smooth, efficient ride.

Zero-turn steering with the individual, hydraulic wheel-drive

SUPERB CUTTING RESULT

The ClearCut[™] cutting deck provides a unique combination of durability, performance and cutting results. This design enables superb results for discharge and collection as well as for mulching.

DURABLE DESIGN

The rugged frame and casters are designed to ensure high durability and reduce chassis flex. The maintenance-free zero turn transmission provides trouble-free performance.



INTEGRATED PARKING BRAKE

The automatic parking brake system automatically activates or deactivates as the steering levers are moved outward or inward, which means the user doesn't have to do it.







Automatic parking brake integrated in the control levers

ClearCut[™] fabricated deck made from welded 3.6mm steel

Not all features shown are available on all models.

CARE



HUSQVARNA CLEARCUT™ SOLID DURABILITY WITH PERFECT CUTTING RESULTS

The ClearCut[™] cutting deck boasts a unique combination of durability, performance and cutting results. This design enables superb results for discharge and collection as well as for mulching. The powerful airflow discharges the clippings at high speed to prevent clogging.

- Welded 3.6mm steel structure with side wear protection •
- 125mm deck height for high air volume •
- Optimally located internal baffles •
- High-lift blades for powerful airflow
 - Cast-iron spindles for high stability
 - Oversized discharge chute

DEMANDING OCCASIONAL USE



High-specification zero turn mower designed to deliver great cutting results without compromising quality or performance. The zero turn mower is ideally suited to demanding domestic and landowner use. Conveniently compact, giving you excellent manoeuvrability, mowing efficiency and mowing comfort. Featuring a highly durable ClearCut™ fabricated steel cutting deck offering excellent clipping dispersal as well a producing class leading airflow, ideal when used with the optional grass collector.

Ideal for applications including:

- **Demanding domestic use**
- Landowner use
- Medium to large areas

Z242F



High-specification domestic use zero turn mower with ClearCut[™] fabricated deck, ergonomic controls and powerful twin-cylinder engine.

- Side Eject (BioClip® optional)
- Optional collector
- ClearCut[™] fabricated deck
- Ergonomic control panel
- Console mounted deck lift
- Integrated parking brake

Engine	Engine size / Power	Transmission	Cutting width
Endurance V-Twin	724cm ³ / 14.9kW	Hydrostatic	107cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
Z242F	967 66 57-03		
Grass collector	587 41 24-01		
BioClip® plate	587 41 23-01		

GRASS COLLECTOR



107cm cutting width 2 bin collector with removable bins for easy emptying of grass clippings. 210 litre capacity.

Fits to	Order PNC
Z242F	587 41 24-01

REPLACEMENT BLADES

Model	Z242F			
Blade type	Collection / Eject x2 Mulch x2			
PNC	592 76 97-01	586 96 25-02		



O Locate your nearest dealer Visit: www.husqvarna.com/uk/dealer-locator

FULL-TIME USE



High-specification commercial-grade zero turn mower built with the toughest materials to ensure high durability, productivity and long service life. Designed for high-class cutting performance, operator comfort and serviceability. The zero turn mower is designed for demanding full-time professional use. Featuring a highly durable fabricated steel side eject cutting deck producing excellent airflow and even clipping dispersal.

Ideal for applications including:

- Professional grounds maintenance
- Larger areas
- Parks and sports facilities
- Large residential
- Holiday parks

Z560X



Commercial-grade, zero-turn mower with high cutting capacity and great manoeuvrability, for efficient mowing of large areas. The 152cm fabricated steel deck produces an excellent cut quality, while the durable design and easy maintenance make for a long and trouble-free product life.

- Commercial-grade large capacity 2-cylinder Briggs and Stratton Vanguard engine.
- HydroGear ZT5400 commercial transmission with high ground speed (19.3km/h).
- Easily accessible service points with an open design for fast and easy access improving serviceability. Tool-less access on all belt covers.
- Heavy duty 11 gauge steel tubular 2" x 3" frame with frame ramp for maximised strength and durability, increasing lifespan.
- Heavy duty and high performance 152cm side eject deck fabricated from 7 gauge steel for maximum performance and durability. Features rear mount support struts which increase durability by reducing stress on the mower frame.
- 10" cast blade spindles for increased strength and operating lifetime.
- Mulch kit including blades available as an accessory.
- Ergonomically designed operator interface with all controls within easy reach. Interface features LED lit fuel gauges.
- High specification suspension seat with bolstered cushions.
- Foot operated deck adjustment with easily visible scale.
- Foldable roll-over protection system.
- Dual fuel tanks 45 litre total capacity.
- · Heavy duty 13" run flat free front tyres.
- · Integrated parking brake.

Engine	Engine size / Power	Transmission	Cutting width
Vanguard V-Twin	810cm ³ / 17.3kW	Hydrostatic	152cm
Model	Order PNC	RRP ex VAT	RRP inc VAT
Z560X	967 66 97-02		
Collection system	967 32 26-01		
BioClip® kit (Mulch)	966 44 47-01		
Blades (standard)	592 89 49-01		



TECHNICAL SPECIFICATIONS

	Z242F	Z560X		
RECOMMENDATION CHART				
Large-sized residential gardens / commercial use	000	•••		
Medium / large-sized residential gardens	●●O	●●O		
Small / medium-sized residential gardens	•••	•00 •00		
Small-sized residential gardens	•••			
FECHNICAL SPECIFICATIONS				
Engine manufacturer	Briggs & Stratton	Briggs & Stratton		
Engine name	Endurance V-Twin	Vanguard V-Twin		
Net power at preset rpm, kW	14.9@3200	17.3@2900		
Fuel tank volume, litres	13.3	45.4		
Transmission type	EZT Integrated	ZT 5400		
Transmission manufacturer	Hydro-Gear	Hydro-Gear		
Pump displacement, cm ³	10	16		
Speed forward, min-max, km/h	0-10.5	0-19.3		
Speed reverse, min-max, km/h	0-4.8	0-9.6		
Cutting methods	Collection / Mulch / Side ejection	Mulch / Side ejection		
Cutting width, cm	107	152		
Cutting height, min-max, mm	38-102	25-127		
Cutting deck type / gauge	ClearCut™ / 3.6mm (10 gauge)	Fabricated / 4.5mm (7 gauge)		
Blade spindle type	Cast iron	Cast iron		
Blade engagement	Electromagnetic clutch	Electromagnetic clutch		
Seat type	15" high back	Professional, suspension		
Tire size, front, inch	11×6-5	13×6.5 –6 (Flat Free)		
Tire size, rear, inch	18×8.5-8	24×12-12		
FEATURES				
Adjustable sliding seat	•	•		
ClearCut™	•	-		
Integrated parking brake	•	•		
Hour meter with service minder	•	•		
Reinforced cutting deck	•	•		
Water hose connection	•	-		
CUTTING SYSTEMS				
BioClip® kit (Mulch) accessory	(•)	(●)		
Collector accessory	(•)	 (●) 		

● = Available (●) = Accessory - = Not available





A PERFECT MATCH MATCH FOR YOUR AWN

All our lawn mowers are designed to give the highest performance and efficiency with thoughtful ergonomic solutions. They have high-specification and easy-starting engines as well as durable cutting decks, delivering first class cutting results every time. So no matter what Husqvarna model you choose, you can expect a mower that's robust, reliable and one that delivers the results for a healthy, well kept lawn.

LAWN MOWERS



WHAT YOU GET **AND HOW WE DO IT**





HEALTHY LAWNS

and convenient to use.

CONVENIENT HANDLING

BioClip® - mulching can help to release nutrients like nitrogen into the soil that are beneficial for growth and overall lawn health, preventing weed growth.

The intuitive controls, easy to reach bail arms and ergonomically designed collectors are details that make our lawn mowers easy

QUIET AND CORDLESS

Our battery-powered mowers enables quiet, efficient collector mowing without the need for petrol or power cords. Ideal for a smaller or mid-sized lawn.

EASY STARTING

Husqvarna petrol lawn mowers are easy to start. Some have features like auto-choke. The battery mowers are even easier just unlock and push down the bail arm!











The variable speed function allows you to adjust the drive speed of the machine to suit your own walking speed.





LAWN MOWERS







GET THE HUSQVARNA CONNECT APP!

Stay connected with your products direct from your smartphone. Access user guides for a smoother start and maintenance, troubleshooting tips & how-to guides, product specific lists for spare parts and relevant accessories. Use the to dealer locator to add your favoured dealer with directions, contact information and opening hours.

Additional functions for connected lawn mowers:

- Runtime statistics and usage data
- Notifications for maintenance and troubleshooting
- Predictions for remaining battery runtime

For more details visit www.husqvarna.com/uk



App Store

Google play

SIZE AND COMPLEXITY **OF YOUR LAWN**

The larger lawn you have, the more you will benefit from a self-propelled mower with a wider cutting deck. A mower with smaller cutting deck and variable speed provides better manoeuvrability if your lawn has many narrow passages and obstacles to mow around.

HOW TO START

Want effortless starting, a battery mower is the natural choice - just push the button.

STORAGE AND TRANSPORT

Do you plan to transport your mower? Then you should consider a compact, lightweight mower with foldable handles.



BATTERY MOWER?

Husqvarna battery-powered lawn mowers are quiet, efficient collecting mowers that are extremely easy to use. Ideal for mid-sized lawns or for trimming areas that a robotic mower or ride-on mower can't reach. Powered by the same BLi batteries as all Husqvarna Battery Series products.

COLLECTING OR MULCHING

If you prefer a tidy cutting result and want to collect grass clippings, we recommend a mower equipped with collector. However, a mower with BioClip® (mulching) function provides a more healthy lawn without need for fertilising or emptying the collector, provided that you mow frequently enough.

DURABLE **COMPOSITE DECK**

The cutting deck on the 200 and 300 series is made from a composite material developed specifically for Husqvarna. It is extremely durable, lightweight, corrosion resistant, doesn't crack and withstands dents and sun bleaching. In short, virtually indestructible.



Husqvarr













LAWN MOWERS

PRODUCT USE GUIDE

Use this guide to help you select the best product for your needs.

TYPE OF USE	MODEL	POWER SOURCE	CUTTING WIDTH	PRODUCT TYPE	DRIVE SYSTEM	
	64	Manual	40cm	Cylinder	Push	
	LC 137i	Li-lon aev	37cm	Wheeled	Push	
_	LC 140SP	Petrol	40cm	Wheeled	Self-propelled	
	LC 142i	Li-ion aev	42cm	Wheeled	Push	
OCCASIONAL USE (DOMESTIC / HOMEOWNER)	LC 142iS	Li-ion Jev	42cm	Wheeled	Single speed self-propelled	
	LB 144i	Li-ion aev	44cm	Wheeled	Push	
	LB 146	Petrol	46cm	Wheeled	Push	
	LC 151S	Petrol	51cm	Wheeled	Self-propelled	
DEMANDING OCCASIONAL USE (DOMESTIC / HOMEOWNER)	LC 247	Petrol	47cm	Wheeled	Push	
	LC 247i	Li-lan aev	47cm	Wheeled	Push	
	LC 247S	Petrol	47cm	Wheeled	Self-propelled	
	LC 253S	Petrol	47cm	Wheeled	Self-propelled	
FREQUENT USE (DEMANDING DOMESTIC /	LC 347V	Petrol	47cm	Wheeled	Variable speed self-propelled	
	LC 347iVX	Li-ion aev	47cm	Wheeled	Variable speed self-propelled	
	LC 353V	Petrol	53cm	Wheeled	Variable speed self-propelled	
LANDOWNER)	LC 353iVX	Li-lan Jacv	53cm	Wheeled	Variable speed self-propelled	
	LB 442i	Li-ion aev	42cm	Wheeled	Push	
PART-TIME USE (LANDOWNER / LANDSCAPER)	LB 448i	Li-lan acv	48cm	Wheeled	Push	
FULL-TIME USE (PROFESSIONAL)	LC 551SP	Petrol	51cm	Wheeled	Self-propelled	
	LC 551VQ	Petrol	51cm	Wheeled	Variable speed self-propelled	
	LC 551iV	Li-ion asv	51cm	Wheeled	Variable speed self-propelled	
	LC 551VBP	Petrol	51cm	Wheeled	Variable speed self propelled	
	LC 553IV	Li-ion asv	53cm	Wheeled	Variable speed self propelled	
	GX 560	Petrol	50.5cm	Hover	Push	
	LB 548i	Li-ion asv	48cm	Wheeled	Push	
	KLIPPO LB 442Q	Petrol	42cm	Wheeled	Push	
	KLIPPO LB 448Q	Petrol	48cm	Wheeled	Push	
	KLIPPO LB 448SQ	Petrol	48cm	Wheeled	Self-propelled	
	KLIPPO LB 453SQ	Petrol	53cm	Wheeled	Self-propelled	
	KLIPPO LB 548SQe	Petrol	48cm	Wheeled	Self-propelled	
	KLIPPO LB 553SQe	Petrol	53cm	Wheeled	Self-propelled	

The product selector is only to be used as a guide. Please visit your local Authorised Husqvarna dealer for more information.

* - Mulch kit is available as an accessory. ** - Collector is available as an accessory. • Optimised solution (guideline only) • Capable solution but not optimal (guideline only)

	CUTTING SYSTEM	Л	RECOMMENDED LAWN AREA				
COLLECTION	REAR EJECT	MULCH	SMALL	MEDIUM	LARGE	PROFESSIONAL GROUNDS	PAGE
• **	•					MAINTENANCE	050
•	•	•*	•				252 252
•	•	•	•				252
•	•	•*	•				253
•	•	•*	•				253
		•	•	•			254
		•	•				254
•	•		•	•			255
•	•	•*	•	•			256
•	•	•*	•	•			256
•	•	•*	•	•			257
•	•	•*	•	•			257
•	•	•*	•	•			258
•	•	•*	•	•			258
•	•	• *		•	•		259
٠	•	•*		•	•		259
		•	•	•		0	260
		•	•	•	0	0	260
•	•	• *		•	•	•	261
•	•	•*		•	•	•	261
•	•	•*		•	•	•	262
•	•	•*		•	•	•	261
		•		•	•	•	262
		•	•	•		•	263
		•	•	•	0	•	263
		•	•	•	0	•	264
		•		•	•	•	264
		•	•	•	0	•	264
		•		•	•	•	265
		•	•	•	0	•	265
		•		•	•	•	265

OCCASIONAL USE



00-

A range of easy to use lawn mowers designed for domestic use on smaller lawns. A choice of manual, petrol and battery power to suit a wide range of requirements. Featuring lightweight and durable decks with optimised design for easy manoeuvrability and excellent collection performance. A choice of push, single speed, variable speed self-propelled and adjustable height handles to suit the needs of any user.

Ideal for applications including:

- Domestic use
- Small lawns



High quality manual cylinder mower designed for domestic use on small lawns. Ideal for areas without a power source.

Rear eject

64

- Hardened reel and bed knife
- Collector available as accessory

Li-ion /36V

Infinite height adjustment

Engine	Cutting Width	Cutting Height	Drive
N/A	40cm	12 - 55mm	Push
Weight	Order PNC	RRP ex VAT	RRP inc VAT
64	964 95 40-02		
Grass Collector	964 90 10-30		

LC 137i



Compact battery-powered lawn mower for domestic use. Low noise and very easy to use. Shared battery system with handheld products for maximum flexibility.

- Collect / BioClip® / rear eject
- PowerBoost and savE[™]
- 40 litre canvas collector
- Plastic deck
- Adjustable, folding handles
- Kit includes B140 and C80

Voltage	Cutting Width	Cutting Height	Drive
36V Li-ion	37cm	25 - 75mm	Push
Model	Order PNC	RRP ex VAT	RRP inc VAT
LC 137i Unit Only	970 50 09-01		
LC 137i Kit	970 50 09-06		

LC 140SP



Easy to use self-propelled petrol mower designed for domestic use. Robust steel cutting deck and compact design.

- Collect / rear eject
- Adjustable, folding handles
 Central height adjustment

Steel deck

 50 litre canvas collector 		 Auto-choke 	
Engine	Cutting Width	Cutting Height	Drive
Husqvarna 123cm ³	40cm	25 - 75mm	Single speed
Weight	Order PNC	RRP ex VAT	RRP inc VAT
26.5kg	970 48 82-01		







Battery-powered lawn mower for domestic use. Low noise and very easy to use. Shared battery system with handheld products for maximum flexibility.

- Collect / BioClip® / rear eject
- Keypad with savE[™]
- PowerBoost

- 50 litre canvas collector
- · Adjustable, folding handles • Kit includes B140 and C80
- Cutting Width **Cutting Height** Drive Voltage 36V Li-ion 42cm 25 - 75mm Push Model Order PNC RRP ex VAT RRP inc VAT LC 142i Unit Only 970 54 18-01 LC 142i Kit 970 54 18-06

LC 142iS



Battery-powered variable speed self-propelled lawn mower for domestic use. Highly efficient low noise brushless motors for maximum run time.

- Collect / BioClip® / rear eject
- Keypad with savE[™]
- 50 litre canvas collector
- PowerBoost
- Adjustable, folding handles
- Kit 1 incl. B140 & C80, Kit 2 incl. 2 x B140 & C80

Voltage	Cutting Width	Cutting Height	Drive
36V Li-ion	42cm	25 - 75mm	Variable Speed
Model	Order PNC	RRP ex VAT	RRP inc VAT
LC 142iS Unit Only	970 54 19-01		
LC 142iS Kit 1	970 54 19-06		

Model	LC 137i	LC 14	2i/iS	LC 151S
Blade size	37cm	41c	m	41cm
PNC	599 83 12-01	589 22	27-01	582 87 28-01
REPLACEMENT BLADES				
Model	LC 137i			LC 140SP
Blade type		Collec	ction	
PNC	529 44 17-1	0	5	87 38 63-10
Blade type	Mulch			
PNC	529 44 16-10 -			
Model		LB 1	44i	
Blade type		Collec	ction	
PNC	-			
Blade type		Mul	ch	
PNC		529 80	73-10	
Model	LC 142i/i	S		LC 151S
Blade type	Collection			
PNC	534 97 55-01 598 56 26-01			
Blade type	Mulch			
PNC	534 97 56-0			97 68 39-01



Li-ion 36V

MULCH KITS

Locate your nearest dealer Visit: www.husqvarna.com/uk/dealer-locator

OCCASIONAL USE



A range of easy to use lawn mowers designed for domestic use on smaller lawns. A choice of manual, petrol and battery power to suit a wide range of requirements. Featuring lightweight and durable decks with optimised design for easy manoeuvrability and excellent collection performance. A choice of push, single speed, variable speed self-propelled and adjustable height handles to suit the needs of any user.

Ideal for applications including:

- Domestic use
- Small lawns



NEW And asv



Built on Husqvarna's trusted quality, design and performance, the LB 144i is a compact and lightweight battery lawn mower that's as easy to use as it is to store.

- Quiet operation
- Easy start
- PowerBoost
- Easy foldable handle
- savÉ™
- Kit includes B140 and C80

Voltage	Cutting Width	Cutting Height	Drive
36V Li-ion	44cm	25 - 75mm	Push
Model	Order PNC	RRP ex VAT	RRP inc VAT
LB 144i	970 64 82-01		
LB 144i Kit	970 64 82-03		

LB 146



Petrol mulch lawn mower for domestic use.

- BioClip® (mulch)
- Adjustable, folding handles
- Auto-choke
- Plastic deck
- Two point cutting height adjustment

Engine	Cutting Width	Cutting Height	Drive
Husqvarna	46cm	35 - 70mm	Push
Weight	Order PNC	RRP ex VAT	RRP inc VAT
22kg	970 54 09-01		



LC 151S



Easy to use self-propelled petrol mower designed for domestic use. Ideal for medium to large sized lawns. Robust steel cutting deck and reliable, easy to start Husqvarna engine.

Steel deck

· Central height adjustment

Drive

- Collect / BioClip® / rear eject
- Adjustable, folding handles
- 65 litre canvas collector
 - Cutting Width **Cutting Height** Engine Husqvarna 51cm 25 - 75mm Single speed Weight Order PNC RRP ex VAT RRP inc VAT 31.6kg 970 48 84-01

MULCH KITS

Model	LC 137i	LC 142i/iS	LC 151S
Blade size	37cm	41cm	41cm
PNC	599 83 12-01	589 22 27-01	598 01 80-01

REPLACEMENT BLADES

Model	LC 137i	LC 140SP	
Blade type	Co	llection	
PNC	529 44 17-01	587 38 63-10	
Blade type	M	Mulch	
PNC	529 44 16-10	-	
Model	LE	3 144i	
Blade type	Collection		
PNC	-		
Blade type	M	Mulch	
PNC	529	80 73-10	
Model	LC 142i/iS	LC 151S	
Blade type	Collection		
PNC	534 97 55-01	598 56 26-01	
Blade type	1	Mulch	
PNC	534 97 56-01	597 68 39-01	



Locate your nearest dealer Visit: www.husqvarna.com/uk/dealer-locator





DEMANDING OCCASIONAL USE



30

Petrol and battery lawn mowers designed for more demanding domestic use on medium and larger lawns. Featuring lightweight and durable composite decks with optimised design for easy manoeuvrability and excellent collection performance. All models feature central height adjustment and adjustable height handles to suit the needs of any user. For increased area capacity the battery version features dual battery slots which allows the use of any combination of one or two BLi batteries, the mower automatically switches to the second battery when the first is empty

Ideal for applications including:

- Demanding domestic use
- Medium to large lawns

LC 247



Petrol lawnmower for demanding domestic use. Composite deck and excellent collection performance.

- Collect / BioClip® / rear eject
- Adjustable, folding handles
- Composite deck
 Central height ac
- 55 litre canvas collector
- Central height adjustment
- Auto-choke

Engine	Cutting Width	Cutting Height	Drive
Husqvarna	47cm	20 - 75mm	Push
Weight	Order PNC	RRP ex VAT	RRP inc VAT
27.5kg	970 54 11-01		



Battery-powered push lawnmower for medium sized lawns. Dual BLi integrated battery slots with automatic switch over and brushless motor.

- Collect / BioClip® / rear eject
- Keypad with savE[™]
- Composite deckAdjustable, folding handles
- 55 litre canvas collector
- Adjustab



LC 247S



Self-propelled petrol lawnmower for demanding domestic use. Composite deck and excellent collection performance.

- Collect / BioClip® / rear eject
- Composite deck
- Adjustable, folding handles
- 55 litre canvas collector
- · Central height adjustment Auto-choke

Engine	Cutting Width	Cutting Height	Drive
Husqvarna	47cm	20 - 75mm	Single speed
Weight	Order PNC	RRP ex VAT	RRP inc VAT
29.5kg	970 54 12-01		

LC 253S



Easy start self-propelled petrol lawnmower for demanding domestic use on larger areas. Composite deck and excellent collection performance.

- Collect / BioClip® / rear eject
- Adjustable, folding handles
- 60 litre canvas collector
- Composite deck
- Central height adjustment
- Auto-choke

Engine	Cutting Width	Cutting Height	Drive
Husqvarna	53cm	20 - 75mm	Single speed
Weight	Order PNC	RRP ex VAT	RRP inc VAT
31.5kg	970 54 15-01		

MULCH KITS

Model	LC 247 / i / S	LC 253S		
Blade size	47cm	53cm		
PNC	589 21 48-01	582 68 06-01		
REPLACEMENT BLADES				
Model	LC 247 / i / S	LC 253S		
Model Blade type	LC 247 / i / S Colle			
Blade type	Colle	ction 579 79 72-10		

Visit: www.buccus Visit: www.husqvarna.com/uk/dealer-locator

HUSQVARNA RECOMMEND

Power 4 Fuel. Pages 312 - 313





HUSQVARNA CONNECT APP Stay connected to your battery lawn

mower direct from your smartphone. Available from App Store and Google Play.





FREQUENT USE



Petrol and battery lawn mowers designed for frequent domestic and landowner use on medium and larger lawns. Featuring lightweight and durable composite decks with optimised design for easy manoeuvrability and excellent collection performance. All models feature central height adjustment and adjustable height handles to suit the needs of any user. Additional 300 series features include variable speed self-drive and premium engines on the petrol powered models. For increased area capacity the battery version features dual battery slots which allows the use of any combination of one or two BLi batteries, the mower automatically switches to the second battery when the first is empty.

Ideal for applications including:

- Frequent domestic use
- Landowner use
- Medium to large lawns

LC 347V



Easy start variable speed self-propelled petrol lawnmower for frequent domestic use. Composite deck and excellent collection performance.

- Collect / BioClip® / rear eject Adjustable, folding handles
 - Central height adjustment
- 55 litre canvas collector
- · Composite deck
- Auto-choke

Engine	Cutting Width	Cutting Height	Drive
Husqvarna	47cm	20 - 75mm	Variable speed
Weight	Order PNC	RRP ex VAT	RRP inc VAT
30.5kg	970 54 13-01		



Battery-powered lawnmower with digital speed control and brushless motors. Dual BLi integrated battery slots with automatic switch over and Husqvarna Connect.

- Collect / BioClip® / rear eject
- Keypad with savE[™]
- 55 litre canvas collector
- Composite deck
- Adjustable, folding handles

Voltage	Cutting Width	Cutting Height	Drive
36V Li-ion	47cm	20 - 75mm	Variable speed
Model	Order PNC	RRP ex VAT	RRP inc VAT
LC 347iVX Unit only	967 86 23-01		



47iVX

LC 353V



Easy start variable speed self-propelled petrol lawnmower for frequent domestic use on larger areas. Composite deck and excellent collection performance.

- Collect / BioClip® / rear eject
- Adjustable, folding handles
- Composite deck Central height adjustment
- - Auto-choke
- 60 litre canvas collector

Engine	Cutting Width	Cutting Height	Drive
Husqvarna	53cm	20 - 75mm	Variable speed
Weight	Order PNC	RRP ex VAT	RRP inc VAT
32kg	970 54 16-01		



High capacity battery-powered lawnmower with digital speed control and brushless motors. Dual BLi integrated battery slots with automatic switch over.

- Collect / BioClip® / rear eject
- Composite deck
- Keypad with savE[™] 60 litre canvas collector
- Adjustable, folding handles
- Husqvarna Connect

Voltage	Cutting Width	Cutting Height	Drive
36V Li-ion	53cm	20 - 75mm	Variable speed
Model	Order PNC	RRP ex VAT	RRP inc VAT
LC 353iVX Unit only	967 86 20-01		

MULCH KITS				
Model	LC 347V	LC 347iV)		
Blade size	47cm	47cm		
DNC	E 00 01 40 01	E00 70 00 (

PNC	589 21 48-01	590 79 09-01
Model	LC 353V	LC 353iVX
Blade size	53cm	53cm
PNC	582 68 06-01	595 00 11-01

REPLACEMENT BLADES

Model	LC 347V / iVX	LC 353V	LC 353iVX
Blade type		Collection	
PNC	590 59 34-10	579 79 72-10	594 07 57-10
Blade type	Mulch (Combi)		
PNC	588 27 57-10	588 90 39-10	595 00 72-10



Locate your nearest dealer Visit: www.husqvarna.com/uk/dealer-locator

HAVE YOU CONSIDERED?

The Husqvarna Automower® range. Page 156





HUSQVARNA CONNECT APP Stay connected to your battery lawn

mower direct from your smartphone. Available from App Store and Google Play.



PART-TIME / FULL-TIME USE



00-

Petrol and battery collection lawn mowers designed for part-time and full-time professional use on medium and larger areas in the most demanding conditions. Featuring commercial grade components and high specification engines or motors that deliver outstanding performance, durability and reliability no matter what the application. Additional 400 / 500 series features include highly durable cast aluminium cutting decks, cast aluminium rims (500 series) and commercial specification engines on the petrol powered models. For increased area capacity the battery version features dual battery slots which allows the use of any combination of one or two BLi batteries, with auto switch. For maximum area coverage the backpack battery can also be used when fitted to machine mounted carrier accessory.

Ideal for applications including:

- Municipality
- Grounds maintenance
- Parks and public spaces
- Sports fields



Compact battery mulch mower designed for semi-professional use, ideal in complex smaller areas. Features user interface with PowerBoost and savE™modes. Fleet Services™ compatible.

- BioClip® (mulch)
- Adjustable handle
- Cast aluminium deckCentral height adjustment
- 2 integrated battery slots
- Vibration level 0.3m/s²

Voltage	Cutting Width	Cutting Height	Drive
36V Li-ion	42cm	34 - 55mm	Push
Model	Order PNC	RRP ex VAT	RRP inc VAT
LB 442i Unit only	970 48 23-01		



Battery mulch mower designed for semi-professional use, ideal in complex areas. Features user interface with PowerBoost and savE[™]modes. Fleet Services[™] compatible.

- BioClip® (mulch)
- Adjustable handle
- 2 integrated battery slots
- Cast aluminium deckCentral height adjustment
- Vibration level 0.3m/s²

Voltage	Cutting Width	Cutting Height	Drive
36V Li-ion	48cm	30 - 60mm	Push
Model	Order PNC	RRP ex VAT	RRP inc VAT
LB 448i Unit only	970 48 24-01		

LC 551SP



High performance fully professional self-propelled petrol lawnmower designed for full-time use. Aluminium deck and excellent collection performance.

- Collect / BioClip® / rear eject
- · Cast aluminium deck / wheels
- Adjustable, folding handles
- 65 litre canvas collector

- · Central height adjustment
- Vibration level 4.5m/s²

Engine	Cutting Width	Cutting Height	Drive
Kawasaki	51cm	26 - 74mm	Single speed
Weight	Order PNC	RRP ex VAT	RRP inc VAT
LC 551SP	970 62 17-01		

LC 551VBP





High performance fully professional variable speed self-propelled petrol lawnmower designed for full-time use. Blade brake clutch and aluminium deck.

- Collect / BioClip® / rear eject
- Cast aluminium deck / wheels
- Blade brake clutch
- Adjustable, folding handles

•	65	litre	canvas	col	lect	or	

 Vibration level 4.5m/s² Cutting Width **Cutting Height** Drive 26 - 74mm 51cm

Engine Kawasaki FJ180KAI Variable speed Order PNC RRP ex VAT RRP inc VAT Weight LC 551VBP 970 62 18-01



High performance fully professional variable speed self-propelled petrol lawnmower designed for full-time use. Husqvarna engine.

Collect / BioClip® / rear eject

•	Cas	t a	lι	Im	ini	iu	m	deo	ck
	~								

 Adjustable, folding handles • 65 litre canvas collector

Central	height	adjustment
• Central	neigni	aujustment

Vibration level 3.2m/s²

Engine	Cutting Width	Cutting Height	Drive
Husqvarna HS 166AP	51cm	26 - 75mm	Variable Speed
Weight	Order PNC	RRP ex VAT	RRP inc VAT
LC 551VO	970 60 94-01		

MULCH KITS					
Model	LC 551SP	LC 55	1VBP	LC 551VQ	
Blade size	51cm	510	cm	51cm	
PNC	589 21 49-02	589 81	75-02	589 21 49-02	
REPLACEMENT BLADES					
Model	LB 442i LB 448i			LB 448i	
Blade type		Mu	lch		
PNC	599 70 71-1	0	597 46 65-10		
Model	LC 551SP		-11/0		
		LC D	51VQ	LC 551VBP	
Blade type	20 33131	Colle		LC 221ABA	
	587 59 08-10		ction	597 46 63-10	
Blade type		Colle	ction 08-10		



Locate your nearest dealer

Visit: www.husqvarna.com/uk/dealer-locator

HUSQVARNA RECOMMEND

4-stroke fuel, oil and lubricants optimised for your Husqvarna lawn mower. Pages 312 - 313



PART-TIME / FULL-TIME USE



Petrol and battery mulch lawn mowers designed for part-time and full-time professional use on medium and larger areas in the most demanding conditions. Featuring commercial grade components and high specification engines or motors that deliver outstanding performance, durability and reliability no matter what the application. 400 / 500 series features include highly durable cast aluminium cutting decks and commercial specification engines on the petrol powered models. For increased area capacity the battery versions features dual battery slots which allows the use of any combination of one or two BLi batteries, with auto switch. For maximum area coverage the backpack battery can also be used when fitted to machine mounted carrier accessory (LB 548i).

Ideal for applications including:

- Municipality •
- **Grounds maintenance**
- Parks and public spaces
- **Sports fields**



High performance fully professional self-propelled battery lawnmower designed for full-time use. Digital control, user interface and Fleet Services[™] compatible.

- Collect / BioClip® / rear eject
- Adjustable, folding handles • 65 litre canvas collector
- Cast aluminium deck / wheels
- Integrated or backpack battery
- Vibration level 0.3m/s²

Voltage	Cutting Width	Cutting Height	Drive
36V Li-ion	51cm	26 - 74mm	Variable speed
Model	Order PNC	RRP ex VAT	RRP inc VAT
LC 551iV Unit only	970 62 60-01		



High performance fully professional self-propelled battery lawnmower designed for full-time use. Robust aluminium deck ideal for mid to large areas.

- BioClip[®]
- Adjustable handle
- Mulching blade

Cast aluminium deck

- Integrated or backpack battery
- Vibration level 1.3m/s²

Voltage	Cutting Width	Cutting Height	Drive
36V Li-ion	53cm	28 - 65mm	Variable speed
Model	Order PNC	RRP ex VAT	RRP inc VAT
LB 553iV Unit only	970 52 57-01		





High capacity mulch mower designed for professional use, ideal in complex areas. Features user interface with PowerBoost and savE™modes. Fleet Services™ compatible.

- BioClip® (mulch)
- Cast aluminium deck / wheels
- Adjustable handle
- Central height adjustment
- Integrated x2 or backpack battery Vibration level 0.3m/s²

Voltage	Cutting Width	Cutting Height	Drive
36V Li-ion	48cm	30 - 60mm	Push
Model	Order PNC	RRP ex VAT	RRP inc VAT
LB 548i Unit only	967 97 73-01		



UPDATED



Petrol hover mower designed for professional use. Uses air cushion mowing, ideal in applications that feature difficult ground conditions and slopes up to 45 degrees.

- ABS Deck
- Folding handles
- 45° maximum working angle
- Mow in any direction
- Vibration level 3.3m/s²

Engine	Cutting Width	Cutting Height	Drive
Honda GCVX-170	50.5cm	10 - 30mm	Push
Weight	Order PNC	RRP ex VAT	RRP inc VAT
GX 560	970 61 75-01		

N/II	JLCH	VI	те
IVIU	ЛГСЦ	Λ	13

MULCH KIIS						
Model		LC 551iV				
Blade size		51cm				
PNC		597 41 37-01				
REPLACEMENT BLADES						
Model	LB 548i	LC 551iV	LB 553iV			
Blade type		Collection				
PNC	N/A	587 59 08-10	N/A			
Blade type		Mulch				
PNC	597 46 65-10	502 88 13-10	529 44 18-10			
Model		GX560				
Blade type		Mulch				

 \bigcirc

PNC

Locate your nearest dealer

Visit: www.husqvarna.com/uk/dealer-locator

511 90 04-00

PART-TIME / FULL-TIME USE



Petrol and battery mulch lawn mowers designed for part-time and full-time professional use on medium and larger areas in the most demanding conditions. Featuring commercial grade components and high specification engines or motors that deliver outstanding performance, durability and reliability no matter what the application. 400 / 500 series features include highly durable cast aluminium cutting decks and commercial specification engines on the petrol powered models. For increased area capacity the battery versions features dual battery slots which allows the use of any combination of one or two BLi batteries, with auto switch. For maximum area coverage the backpack battery can also be used when fitted to machine mounted carrier accessory (LB 548i).

Ideal for applications including:

- Municipality •
- **Grounds maintenance**
- Parks and public spaces
- **Sports fields**

KLIPPO LB 442Q

NEW

NEW



Small, compact and easy to operate Bioclip® mower. Ideal for semi-professional use on small and complex areas.

- BioClip®
- Adjustable hande
- Steel rims
- · Cast aluminium deck
- Central height adjustment
- Vibration level 5.1m/s²

Engine	Cutting Width	Cutting Height	Drive
Husqvarna HS 166AP	42cm	34 - 55mm	Push
Weight	Order PNC	RRP ex VAT	RRP inc VAT
KLIPPO LB 442Q	970 60 85-01		

KLIPPO LB 448Q



Standard sized, compact and easy to operate BioClip® mower. Ideal for semi-professional use on medium-sized areas.

•	BioCl	in®

- Adjustable hande
- Steel rims
- Cast aluminium deck
- · Central height adjustment
- Vibration level 4.2m/s²

Engine	Cutting Width	Cutting Height	Drive
Husqvarna HS 166AP	48cm	30 - 60mm	Push
Weight	Order PNC	RRP ex VAT	RRP inc VAT
KLIPPO LB 448Q	970 60 87-01		



Standard sized, compact and front-wheel driven BioClip® mower. Ideal for semi-professional use on medium-sized areas.

- BioClip®
- Adjustable hande
- Self-propelled. front wheel drive

Self-propelled, fro		Vibration level 4	,
Engine	Cutting Width	Cutting Height	Drive
Husqvarna HS 166AP	48cm	30 - 60mm	Single speed
Weight	Order PNC	RRP ex VAT	RRP inc VAT
KLIPPO LB 448SQ	970 60 88-01		

Cast aluminium deck

Central height adjustment



KLIPPO LB 453SQ

Full-sized, compact and front-wheel driven BioClip® mower. Ideal for semi-professional use on medium to large sized areas.

- BioClip®
- Cast aluminium deck
- · Adjustable hande • Self-propelled, front wheel drive
- · Central height adjustment Vibration level 6.4m/s²
- Cutting Width **Cutting Height** Drive Engine Husqvarna HS 166AP 53cm 30 - 60mm Single speed Weight Order PNC RRP ex VAT RRP inc VAT KLIPPO LB 453SQ 970 60 89-01

KLIPPO LB 548SQe



A compact BioClip® mower with front-wheel drive for commercial use. Ergonomic side-adjustable and effective anti-vibrated handle system.

BioClip®

Engine

- Adjustable, anti-vibrated hande
- Self-propelled, front wheel drive
- Vibration level 4.0m/s² Cutting Width **Cutting Height**

Cast aluminium deck

· Central height adjustment

Drive 30 - 60mm Single speed RRP ex VAT RRP inc VAT

Husqvarna HS 166AP	48cm	3
Weight	Order PNC	R
KLIPPO LB 548SQe	970 60 90-01	



Reliable BioClip® mower with front-wheel drive for commercial use. Ergonomic side-adjustable and effective anti-vibrated handle system.

•	BioClip®
---	----------

- Cast aluminium deck
- Adjustable, anti-vibrated hande
- Self-propelled, front wheel drive
- · Central height adjustment
- Vibration level 3.4m/s²

oon proponod, no			5. 1117 0
Engine	Cutting Width	Cutting Height	Drive
Husqvarna HS 166AP	53cm	28 - 65mm	Single speed
Weight	Order PNC	RRP ex VAT	RRP inc VAT
KLIPPO LB 553SOe	970 60 91-01		

REPLACEMENT BLADES

Model	KLIPPO LB 442Q	KLIPPO LB 448Q	KLIPPO LB 448SQ
Blade type		Mulch	
PNC	502 88 12-10	502 88 13-10	502 88 13-10
Model	KLIPPO LB 453SQ	KLIPPO LB 548SQe	KLIPPO LB 553SQe
Blade type		Mulch	
PNC	502 88 14-10	502 88 13-10	502 88 14-10

NEW

NEW

Content your nearest dealer Visit: www.husqvarna.com/uk/dealer-locator



TECHNICAL SPECIFICATIONS

	LC 140SP	LB 146	LC 151S	LC 247	
TECHNICAL SPECIFICATIONS					
Engine manufacturer	Husqvarna	Husqvarna	Husqvarna	Husqvarna	
Engine name	HS 123A	HS 139A	HS 166A	HS 139A	
Net power at preset rpm, kW	1.95 @ 3000	2.2 @ 2900	2.7 @ 2800	1.8@2900	
Fuel tank volume, litres	0.9	1.0	1.0	0.8	
Drive system	Self-propelled. single speed	Push	Self-propelled	Push	
Drive wheels	Rear	-	Rear	-	
Rims, material	Plastic	Plastic	Plastic	Plastic	
Wheel size, front /rear, mm	152.4/203.2	170/170	203/203	170/210	
Speed, km/h	4.0	_	3.6	4.5	
Cutting deck material	Steel	ABS	Steel	Composite	
Cutting methods	Collection / Rear ejection	BioClip®	Collection / BioClip®/ Side ejection	Collection / BioClip®/ Rear ejection	
Cutting width, cm	40.0	46.0	51.0	47.0	
Cutting height, min-max, mm	25-75	35-70	25-75	20-75	
Cutting height steps	10	3	7	6	
Blade type	Collect	Mulcher blade	Collect	Collect	
Collector type	Hard top with fabric bag	-	Fabric with dust blocker	Fabric with dust blocker	
Collector volume, litres	50	_	65	55	
Handle type	Ergonomic	Ergonomic	Ergonomic (bag through)	Ergonomic	
Weight, kg	26.5	22.0	32.3	26.8	
FEATURES					
Anti-vibrated handle	-	-	-	-	
Blade brake clutch	-	—	—	-	
Central cutting height adjustment	•	•	•	•	
Double ball-bearing wheels	-	•	•	•	
Foldable handle	•	•	•	•	
Handle height adjustment	•	•	•	•	
ReadyStart™	-	-	_	-	
Side adjustable handle	_	-	-	—	

● = Available (●) = Accessory — = Not available

LC 247S	LC 253S	LC 347V	LC 353V	LC 551SP
Husqvarna	Husqvarna	Husqvarna	Husqvarna	Kawasaki
HS 139A	HS 166A	HS 166A	HS 166A	FJ180V-BM91-M
1.8@2900	2.4@2800	2.4@2800	2.4@2800	2.9@2800
0.8	1.0	1.0	1.0	1.9
Self-propelled. single speed	Self-propelled, single speed	Self-propelled, variable speed	Self-propelled, variable speed	Self-propelled, single speed
Rear	Rear	Rear	Rear	Rear
Plastic	Plastic	Plastic	Plastic	-
170/210	190/230	170/210	190/230	210/210
4.5	4.0	5.0	5.0	4.1
Composite	Composite	Composite	Composite	Aluminium
Collection / BioClip®/ Rear ejection	Collection / BioClip®/ Rear ejection	Collection / BioClip®/ Rear ejection	Collection / BioClip ®/ Rear ejection	Collection / BioClip ®/ Rear ejection
47.0	53.0	47.0	53.0	51.0
20-75	20-75	20-75	20-75	26-74
6	6	6	6	6
Collect	Collect	Collect	Collect	Collect
Fabric with dust blocker	Fabric with dust blocker	Fabric with dust blocker	Fabric with dust blocker	Fabric with dust blocker
55	60	60	60	65
Ergonomic	Comfort	Comfort	Comfort	Ergonomic
27.8	32.0	30.0	33.0	48.5
-	-	-	-	-
-	-	-	-	-
•	•	•	•	•
•	•	•	•	•
•	•	•	•	•
•	•	•	•	•
-	•	•	•	-
	_	_		_

ALWAYS USE GENUINE HUSQVARNA LUBRICANTS AND SPARE PARTS FOR YOUR LAWN MOWER

These high quality spare parts and lubricants are developed to facilitate the care and maintenance of your Husqvarna equipment and enable trouble-free operation and storage. We also supply the most frequent service parts for our products. See your owner's manual or consult your Authorised Husqvarna dealer if any uncertainty occurs.

IMPORTANT! Check the oil/lubricant levels before each work shift and top up.

- Mulch blades
- Standard blades
- Collect blades,
- Engine oil 10 W/30
- Spark plugs
- Air filters and oil filters

Always read your owner's manual or contact your dealer for recommended parts for your machine.

NOMINAL POWER A new machinery directive (2006/42/EC) came into force on January 1. 2010. requiring manufacturers to declare the nominal power of engines, in kilowatts (kW). The power rating of the engines indicated is the average net power output during a normal working situations and meets applicable noise regulations (at specified rpm, see owner manual) of a typical production engine for the engine model measured to SAE standard J 1349/ISO 1585. Mass production engines may differ from this value. Actual power output for the engine installed in the final machine will depend on the operating speed, environmental conditions and other variables.

(f) www.facebook.com/HusqvarnaUK

Recommended frequently used parts for lawn mowers:



TECHNICAL SPECIFICATIONS

	LC 551VBP	LC551VQ	GX 560	KLIPPO LB 442Q	
TECHNICAL SPECIFICATIONS					
Engine manufacturer	Kawasaki	Husqvarna	Honda	Husqvarna	
Engine name	FJ180KAI	HS 166AP	GCVX-170	HS 166AP	
Net power at preset rpm, kW	2.9@2800	2.6@2800	3.4 @ 3150	2.75@2900	
Fuel tank volume, litres	1.9	1.5	0.9	1.5	
Drive system	Self-propelled, single speed	Self-propelled, variable speed	Push, hover model	Push	
Drive wheels	Rear	Rear	-	-	
Rims, material	-	Plastic	—	Steel	
Wheel size, front / rear, mm	210/210	210/210	—	180/180	
Speed, km/h	5.0	5.0	—	-	
Cutting deck material	Aluminium	Aluminium	ABS plastic	Aluminium	
Cutting methods	Collection / BioClip®/ Rear ejection	Collection / BioClip® / Rear ejection	-	BioClip	
Cutting width, cm	51.0	51.0	50.5	42.0	
Cutting height, min-max, mm	26-74	26-75	10-30	34-55	
Cutting height steps	6	6	3	4	
Blade type	Collect	Collect	—	Mulch	
Collector type	Fabric with dust blocker	Fabric with dust blocker	-	-	
Collector volume, litres	65	65	-	-	
Handle type	Ergonomic	Ergonomic	Comfort	Straight	
Weight, kg	52.5	51.0	18.0	25.5	
FEATURES					
Anti-vibrated handle	-	-	—	-	
Blade brake clutch	•	-	_	-	
Central cutting height adjustment	•	•	_	•	
Double ball-bearing wheels	•	•	-	•	
Foldable handle	•	•	•	-	
Handle height adjustment	•	•	_	•	
ReadyStart™	•	-	_	-	
Side adjustable handle	-	-	-	•	

 \bullet = Available (\bullet) = Accessory - = Not available



KLIPPO LB 448Q	KLIPPO LB 448SQ	KLIPPO LB 453SQ	KLIPPO LB 548SQE	KLIPPO LB 553SQE
Husqvarna	Husqvarna	Husqvarna	Husqvarna	Husqvarna
 HS 166AP	HS 166AP	HS 166AP	HS 166AP	HS 166AP
 2.75@2900	2.75 @ 2900	2.75@2900	2.75@2900	2.75@2900
1.5	1.5	1.5	1.5	1.5
Push	Self-propelled, single speed	Self-propelled, single speed	Self-propelled, single speed	Self-propelled, single speed
-	Front	Front	Front	Front
Steel	Steel	Steel	Steel	Aluminium
208/208	208/208	208/208	203/203	203/203
-	4.5	4.5	4.5	4.8
Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
BioClip®	BioClip®	BioClip®	BioClip®	BioClip®
 48.0	48.0	53.0	48.0	53.0
 30-60	30-60	30-60	30-60	28-65
6	6	6	6	5
Mulch	Mulch	Mulch	Mulch	Mulch
-	-	-	-	-
 -	-	-	-	-
Straight	Straight	Straight	Anti-vibrated	Anti-vibrated
29.0	32.5	33.5	34.5	38.5kg
-		-	•	•
-	-	-	-	-
•	•	•	•	•
•	•	•	•	•
-	-	-	-	-
•	•	•	•	•
-	-	-	-	-
•	•	•	•	•

ALWAYS USE GENUINE HUSQVARNA LUBRICANTS AND SPARE PARTS FOR YOUR LAWN MOWER

These high quality spare parts and lubricants are developed to facilitate the care and maintenance of your Husqvarna equipment and enable trouble-free operation and storage. We also supply the most frequent service parts for our products. See your owner's manual or consult your Authorised Husqvarna dealer if any uncertainty occurs.

IMPORTANT! Check the oil/lubricant levels before each work shift and top up.

- Mulch blades
- Standard blades
- Collect blades,
- Engine oil 10 W/30
- Spark plugs
- Air filters and oil filters

Always read your owner's manual or contact your dealer for recommended parts for your machine.

NOMINAL POWER A new machinery directive (2006/42/EC) came into force on January 1. 2010. requiring manufacturers to declare the nominal power of engines, in kilowatts (kW). The power rating of the engines indicated is the average net power output during a normal working situations and meets applicable noise regulations (at specified rpm, see owner manual) of a typical production engine for the engine model measured to SAE standard J 1349/ISO 1585. Mass production engines may differ from this value. Actual power output for the engine installed in the final machine will depend on the operating speed, environmental conditions and other variables.



Recommended frequently used parts for lawn mowers:





Designed to take tough treatment, Husqvarna tillers are built to withstand intensive operation over many years. Their comfortable handle system and well-grouped controls make them easy to work with and the anti-clockwise rotation system breaks up soil with ease and efficiency.







CONVENIENT WORKING POSITION

EASY MAINTENANCE

as well as easy maintenance.

The ergonomically designed handlebar with soft grip and easy-access controls provides convenient working position.

The durable and detachable transmission housing with lubrication nipple means reliable operating over many years

DEEP-DIGGING OR SURFACE PREPARATION

The helicoiled tines rotate anti-clockwise and break up the soil smoothly even in tough conditions. This solution makes the tillers capable of deep-digging heavy soil as well as preparing the surface for a seedbed.

BUILT TO LAST

All components in our tillers are of the highest quality and thoroughly tested to ensure optimal durability.





ADDED VERSATILITY

The ridger accessory when used with the TF 325 creates ridges when planting potatoes, helping to protect against weeds and daylight.



T300RH COMPACT PRO



Versatile front tine tiller for smaller domestic gardens, flower beds and vegetable plots. Easy to operate and transport thanks to its low weight. Propelled forwards by the front tines.

Carry Handle

- Front-tine
- 1 forward gear
- Optional accessories
- Foldable handlebar

Engine	Engine size / Power	Working width	Working depth
Honda GX 25	25cm³ / 0.6kW	24cm	15cm
Weight	Order PNC	RRP ex VAT	RRP inc VAT
12.0kg	967 33 01-01		

TF 325



Front tine tiller designed for domestic and landowner use on larger areas. Powerful engine with reverse gear for easy operation. Propelled forwards by the front tines.

• Front-tine

• Foldable transport wheel

UPDATED

UPDATED

- 1 forward / 1 reverse gear
- Foldable handlebar
- Optional accessories
- · Plant guards

Engine	Engine size / Power	Working width	Working depth
RATO R210	212cm ³ / 4kW	60cm	30cm
Weight	Order PNC	RRP ex VAT	RRP inc VAT
46.0kg	970 65 26-01		

TR 348



Powerful rear-tine tiller for demanding domestic and landowner use. Ideal for densely packed soil and older lawns, features driving large wheels.

 Rear-tine 	9
-------------------------------	---

- 2 forward / 1 reverse gear
- · Height adjustable handlebar Large chevron tyres Front counterweight

Engine	Engine size / Power	Working width	Working depth
RATO R210	212cm³ / 4kW	48cm	15cm
Weight	Order PNC	RRP ex VAT	RRP inc VAT
73.0kg	970 65 28-01		

• Self-propelled (wheels)

T300RH MOSS RAKE



Easily removes moss from the lawn to promote healthy grass growth.

Fits to	Order PNC
T300RH	967 99 16-15
RRP ex VAT	RRP inc VAT



TF 325 RIDGER

Creates ridges when planting potates, helping to the protect against weeds and daylight.

Fits to	Order PNC
TF 325	966 54 52-01
RRP ex VAT	RRP inc VAT

HUSQVARNA RECOMMEND

Power 4 Fuel. Pages 312 - 313





TILLERS

TECHNICAL SPECIFICATIONS

	T300RH COMPACT PRO	TF 325	TR 348
RECOMMENDATION CHART			
Frequent use – unbroken and overgrown land	000	000	•••
Frequent use – easier cultivation, moss clearing and edge trimming	•••	● 00	000
Seldom use – cultivation and ridging	•00	•••	000
TECHNICAL SPECIFICATIONS			
Engine manufacturer	Honda	RATO	RATO
Engine name	GX25	R210	R210
Cylinder displacement, cm ³	25	212	212
Net power at preset rpm, kW	0.6@6500	4@3300	4@3300
Fuel tank volume, litres	0.58	3.6	3.6
Transmission type	Worm gear / Manual	Chain / Manual	Chain / Manual
Transmission steps forward	1	1	2
Transmission steps reverse	_	1	1
Tiller type	Front-tine	Front-tine	Rear-tine
Number of tines	4	4	4
Tine diameter, mm	225	320	300
Working width, cm	28	60	48
Working depth, cm	15	30	15
Weight, kg	12	46	73
FEATURES			
Carrying handle	•	•	-
Chevron tyres	_	-	—
Counterweight	-	-	•
Detachable transmission	-	•	_
Drag bar	•	•	•
Driven wheels	-	-	-
Foldable handlebar	•	•	•
Handlebar-mounted gear selection	-	•	•
Plant guards	-	•	-
Reverse gearbox	-	•	•
Tine shield	•	•	•
Transport wheel	-	•	-
Vertically adjustable handlebar	-	•	•
ACCESSORIES AVAILABLE			
Ridger with metal wheels	-	•	-

 \bullet = Available (\bullet) = Accessory — = Not available



For any cleaning around the home and garden, nature's own cleaning fluid has unexpected powers. With the range of Husqvarna high pressure washers, you will discover that water's washing performance is hard to beat when combined with world-leading technology and engineering. Fresh water should always be used sparingly, and the Husqvarna pressure washer range actually uses about 80% less water to get the job done when compared to a regular hose.



WHAT YOU GET AND HOW WE DO IT



EFFICIENT WORK

POWERFUL CLEANING

The spray lance is ergonomically designed and the swivel couplings prevent tangling of the extra-long, flexible high pressure hose. The trigger starts and stops the motor automatically.

With their high working pressure, adjustable nozzles and smart detergent control, Husqvarna pressure washers deliver maximum cleaning performance with minimal use of water.

GREAT VERSATILITY

Use your Husqvarna pressure washer with surface cleaners, brush kit, extension hose, foam sprayer or any of the many accessories available to make your work easier.

ROBUST DESIGN

All Husqvarna pressure washers are built with high-quality components for a long service life. The larger models have features like induction motor, brass pump head and steel reinforced hose.

FLEXIBLE HIGH-PRESSURE HOSES

Each series is equipped with a high quality, flexible, high pressure hose to prevent tangling. The PW 480 features a steel reinforced high pressure hose with a rubber overlay to ensure durability while retaining its flexibility.









Find out more on page 289

Ì

OCCASIONAL USE



Compact series of pressure washers with robust and purposeful design, ideal for most cleaning tasks around the home and garden. Two swivel functions for nozzle adjustment and quick connection prevent hassle when setting up and using the pressure washer. Both models feature on-board accessory storage, hose reel and power cord storage making operation and storage easy and efficient. Products are supplied with two nozzles and foam sprayer for applying detergent. The PW 235R features remote pressure adjustment operated from the spray lance allowing the water pressure to be easily set whilst working.

Ideal for applications including:

- **Occasional domestic use** .
- Household and garden cleaning
- Smaller paved areas, decking and pathways
- **Smaller vehicles and bicycles**

PW 125



Compact and lightweight pressure washer, ideal for easy and convenient cleaning of garden furniture, pathways and vehicles.

- 7m reinforced hose
- Aluminium pump
- Quick Connect couplings

NEW

• On board storage

Maximum Pressure	Water flow	Power	Weight
125 bar	320 - 460 l/h	1500W	6.6kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
PW 125	967 67 64-02		

PW 130



A conveniently small, lightweight and intuitive electric pressure washer for hassle-free operation and compact storage.

- UltraFlex High Pressure Hose • Dual gun and lance storage
- Intuitive nozzle and pressure guide Compact and lightweight
 - Metal Pump

Carrying handle		Metal Pump	Ū	
Maximum Pressure	Water flow	Power		Weight
130 bar	324-465 l/h	1500W		6.5kg
Model	Order PNC	RRP ex VAT		RRP inc VAT
PW 130	970 64 80-02			



PART-TIME USE



High specification pressure washers offering the highest levels of performance and product lifetime. Built for the toughest cleaning applications including larger vehicles, driveways and large paved areas. The longer hose lengths allow increased cleaning area coverage without the need to re-position the pressure washer.

Both models feature large wheels and aluminium telescopic handle which makes the products easy to transport and store. High performance induction motors ensure maximum cleaning performance whilst remaining quiet. Products are supplied with two nozzles and PW 350 a foam sprayer for applying detergent.

The PW 480 features pressure control for optimal adjustment and minimum water consumption, as well as an on board detergent tank.

Ideal for applications including:

- Demanding domestic and landowner use
- Larger paved areas, decking and driveways
- Vehicles and machinery

PW 235R



Robust all-round pressure washer with remote control making it easy to set your required pressure while working. Aluminium pump provides long lifetime.

- 8m reinforced hose
- Aluminium pump
- Remote pressure control
- Quick Connect couplings

NEW

• On board storage

Maximum Pressure	Water flow	Power	Weight
135 bar	350 - 520 l/h	1800W	12.7kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
PW 235R	970 45 74-02		

PW 240



An electric pressure washer purposely designed to optimise your outdoor cleaning.

• Dual gun and lance storage

Metal Pump

- UltraFlex High Pressure Hose
- Intuitive nozzle and pressure guide
 Compact and lightweight
- Carrying handle

ourrying numuro		motarramp	
Maximum Pressure	Water flow	Power	Weight
140 bar	348-465 l/h	1800W	9.5kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
PW 240	970 64 81-02		

278

PW 350



Powerful pressure washer designed for demanding jobs. Features low force grip, low noise induction motor and long spray lance.

- 9m reinforced hose
- Aluminium pump
- Aluminium telescopic handle
- Quick Connect couplings
- On board storage
- Low noise induction motor

Maximum Pressure	Water flow	Power	Weight
150 bar	420 - 500 l/h	2100W	18.8kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
PW 350	967 67 77-02		

PW 480



High pressure washer with robust design built for the toughest cleaning tasks. Water flow and integrated detergent tank are controlled on the front panel. A brass pump head ensures an outstanding long-term performance.

- 13m steel armed hose
- Brass pump
- Aluminium telescopic handle

Quick Connect couplings

- On board storage
- Low noise induction motor

Maximum Pressure	Water flow	Power	Weight
180 bar	540 - 610 l/h	2900W	27.8kg
Model	Order PNC	RRP ex VAT	RRP inc VAT
PW 480	970 46 83-02		



ACCESSORIES



A range of specialist Husqvarna accessories designed for tackling specific applications, making your pressure washer much more versatile and efficient.

Ideal for applications including:

- Cleaning hard surfaces, paved areas, decking and driveways
- Cleaning vehicles and machinery
- Unblocking pipes and guttering
- Cleaning delicate surfaces
- Water removal
- Cleaning solution & detergent application

VEHICLE KIT



Vehicle kit contains a wide fan jet nozzle for a quick and gentle cleaning of sensitive surfaces, an angled nozzle for hard-to-reach areas such as wheel arches, and a wash brush with a squeegee.

RRP inc VAT

Fitment	Order PNC	RRP ex VAT
PW 125 - PW 130 - PW 350	590 66 07-01	

ROTATING BRUSH KIT



Rotating brush kit has three different brushes that can be mounted for soft, hard and difficult to reach surfaces. It has a built in detergent tank with regulation for a perfect dosage.

Fitment	Order PNC	RRP ex VAT	RRP inc VAT
All models	590 66 06-01		

FOAM SPRAYER FS 300



Foam sprayer FS 300 is an efficient and fast covering foam sprayer with long lasting cleaning effect which maximises detergent performance. The FS 300 saves up to 30% cleaning solution compared to a standard foam sprayer.

Fitment	Order PNC	RRP ex VAT	RRP inc VAT
PW 125 - PW 130 - PW 350	590 66 04-01		

SURFACE CLEANER SC 300



SC 300 is a compact rotating splash free cleaner with pressure regulation. It is suitable for cleaning both vertical and horizontal larger surfaces such as patios, driveways, terraces and walls.

Fitment	Order PNC	RRP ex VAT	RRP inc VAT
PW 125 - PW 130 - PW 350	590 65 79-01		

SURFACE CLEANER SC 400



SC 400 is a large rotating splash free cleaner with pressure regulation. Supplied with an extra set of high pressure nozzles for removal of stubborn dirt. It is suitable for cleaning larger surfaces such as patios, driveways, walls and terraces.

Fitment	Order PNC	RRP ex VAT	RRP inc VAT
All models	590 65 78-01		

PIPE CLEANING HOSE - 15M



The flexible self-feeding pipe cleaning hose is perfect when cleaning pipes, blocked drains or rain gutters. The two nozzles included enables efficient cleaning in both small and large diameter pipes.

Fitment	Order PNC	RRP ex VAT	RRP inc VAT
All models	590 66 10-01		

EXTENSION HOSE - 8M



8 metre extension hose with textile reinforcement making it durable and highly flexible, also features quick connection. Hose is designed to increase working area and can be used for pressures up to 150 bar and temperatures up to 65°C.

Fitment	Order PNC	RRP ex VAT	RRP inc VAT
PW 125 - PW 130 - PW 350	590 66 08-01		

ANGLED SPRAY LANCE



Angled spray lance with an integrated nozzle is designed for cleaning hard-to-reach areas such as under chassis, car wheel arches or roof gutters.

Fitment	Order PNC	RRP ex VAT	RRP inc VAT
All models	590 66 11-01		

WATER SUCTION NOZZLE



Water suction nozzles turns your high pressure washer into a pump for removal of large volumes of unwanted water. Ideal when dealing with excess flood water, emptying ponds or drying up pools on the patio.

Fitment	Order PNC	RRP ex VAT	RRP inc VAT
PW 125 - PW 130 - PW 350	590 66 05-01		

EXTENSION HOSE STEEL ARMED - 10M



10 metre extension hose with steel reinforcement making it robust and highly flexible, also features quick connection. Hose is designed to increase working area and can be used for pressures up to 160 bar and temperatures up to 100°C.

Fitment	Order PNC	RRP ex VAT	RRP inc VAT
All models	590 66 09-01		

Å

SUCTION HOSE - 3M

3 metre suction hose enables to feed water to your high pressure washer from alternative sources such as rain water tanks and barrels. It is recommended to also use a separate water filter (PNC 590 65 93-01) to prevent dirt damaging the pump.

Fitment	Order PNC	RRP ex VAT	RRP inc VAT
All models	590 65 97-01		

WATER FILTER WF 300



Water Filter protects the pump against dirt and debris ingress when using water from an external source such as a rain water tank. It is recommended to be use with Suction hose 3M.

Fitment	Order PNC	RRP ex VAT	RRP inc VAT
All models	590 65 93-01		

BACKFLOW PREVENTER



Backflow preventer is designed to prevent dirty water from washing back into a clean water supply form the high pressure washer.

Fitment	Order PNC	RRP ex VAT	RRP inc VAT	
All models	590 65 95-01			

CLEANING SOLUTIONS



Stone & wood cleaner - Highly effective detergent ideal for cleaning pavements, bricks and wood. Also suitable for other cleaning surfaces that endure water. Vehilcle cleaner & wax - powerful and gentle detergent primarily designed for washing cars or other type of vehicles with sensitive surfaces. The detergent has a 3-in-1 effect-wash, clean and shine.

RRP inc VAT

Solution	Order PNC	RRP ex VAT	
Stone & wood cleaner	590 66 12-01		
Vehicle cleaner & wax	590 66 13-01		

{ ||

TECHNICAL SPECIFICATIONS

	PW 125	PW 130	PW 235R	PW 240	PW 350	PW 480
RECOMMENDATION CHART Large-sized residential gardens/ landowner areas	000	000	000	000	000	••0
Medium-sized residential gardens	•000	●00	•••	•••	•••	•••
Small-sized residential gardens	•••	•••	•••	•••	•••	•••
Vehicle cleaning	•00	•00	•••	•••	•••	•••
	•00	•00		•••		
TECHNICAL SPECIFICATIONS	105	105	105	1.10	150	100
Max pressure, bar	125	135	135	140	150	180
Operating pressure max, bar	95	95	105	100	135	140
Water flow, I /h	320-460	324 - 465	350-520	348 - 465	420-500	540-610
Voltage, V	230	230	230	230	230	230
Power rating, W	1500	1500	1800	1800	2100	2900
Max. water inlet temperature, °C	40	40	40	40	40	60
Trigger gun vibration level with standard nozzle, m/s ^{2*} Rated current, A	< 2.5 ± 1 7.4	< 2.5 ± 1 6.5	< 2.5 ± 1 8.0	< 2.5 ± 1 7.0	< 2.5 ± 1 9.5	< 2.5 ± 1 12.6
Guaranteed sound power level LWA, dBA**	87	89	86	92	9.5	12.0 89
Max self-priming suction, m	0.5	0.5	0.5	0.5	1.0	1.0
	5	5	5	5	5	5
Power cord length, m	5	6	2 8	5 8	9	13
Hose length, m Detergent tank volume. I	0.5	0.4	8 0.5	0.5	9	2.5
Product size (W×L×H), mm	300×315×820	290x260x490	265×275×845	350x330x900	350×325×710	2.5 390x350x810
Weight, kg	7.1	6.5	10.4	9.5	18.8	27.8
weight, ky	7.1	0.0	10.4	J.J	10.0	27.0
FEATURES						
Metal pump	•	•	•	•	•	•
Double swivels and quick connect	•	•	•	•	•	•
On board storage	•	•	•	•	•	•
Rotary nozzle	•	•	•	•	•	•
Flat jet nozzle, variable pressure	•	•	 (fixed) 	 (fixed) 	•	•
Hose reel	•	•	•	•	•	•
Foam sprayer	•	•	•	•	•	-
Aluminium carrying handle	_	—	_	—	•	•
Aluminium telescopic handle	—	—	—	—	•	•
Power cord storage with quick release	_	_	_	_	•	•
Flexible high-pressure hose	•	•	•	•	•	_
Steel reinforced high-pressure hose	_	_	_	_	_	•
Induction motor	—	—	-	_	•	•
Long spray lance	_	_	_	_	•	•
Low force grip	-	_	-	-	•	•
Brass pump	-	_	-	_	_	•
Pressure control	_	_	_	_	_	•
Internal detergent tank	—	—	-	-	-	•
Ceramic coated pistons	—	_	_	-	_	-
Remote pressure control	—	_	•	•	_	-
AVAILABLE ATTACHMENTS Angled spray lance	•	•	•	•	•	•
Backflow preventer	•	•	•	•	•	•
Extension hose steel reinforced 10 m	•	•	•	•	•	•
Extension hose textile reinforced 8 m	•	•	•	•	•	_
Foam sprayer FS 300	•	•	•	•	•	
	•	-	•	-	•	•
O-ring kit	•	•	•	•	•	•
Pipe cleaning hose 15 m	•	•	•	•	•	•
Rotating brush kit	•	•	•	•	•	•
Stone and wood cleaner	•	•	•	•	•	•
Suction hose	•	•	•	•	•	•
Surface cleaner SC 300	•	•	•	•	•	-
Surface cleaner SC 400	•	•	•	•	•	•
Vehicle cleaner and wax	•	•	•	•	•	•
Vehicle cleaning kit	•	•	•	•	•	-
Water filter	•					•

*Hand-arm vibration according to ISO 5349-1 with flat jet nozzle. **Noise emissions in the environment measured as sound power (LWA) in conformity with EC directive 2000 /14/EC.

The guaranteed sound power level includes variation in production as well as variation from the test code with 1–3 dB(A).







Just put a sensor on any piece of equipment and you'll always know where your machines are, how much they've been used, when they need to be serviced or replaced – and much more. If you use our professional robotic mowers, you don't even need to install a sensor. All this updated information – easily accessible from your phone, tablet or laptop – allows you to save a lot of time and money, to develop your business even further.

HOW IT WORKS

The system keeps track of your equipment either through the use of machine sensors or – in the case of our professional robotic mowers – built-in connectivity. The equipment data is transmitted via Bluetooth (for Automower® it's via 2G/3G) and can either be collected in the field via the intuitive Husqvarna Fleet Services[™] app, or back in storage via the Husqvarna Fleet Services[™] Gateway app. The combination of these apps gives you updated data that's automatically uploaded to the cloud-based account where you can access it from any device if you decide not to continue with the service. **Read more at www.husqvarna.com/uk/services/fleet-services**



REDUCE YOUR CO₂ EMISSIONS

Whether you work for a council or a commercial contractor, reducing CO_2 emissions is an important target. The Carbon Footprint Calculator provides you with the data and insights you need to take action – and of course, to report your progress to your stakeholders.

COMPLETE FLEET MANAGEMENT, HOW IT MAKES YOUR WORKDAY EASIER


The system keeps track of your equipment through the use of machine sensors. The equipment data is transmitted via Bluetooth and can either be collected in the field via the intuitive Husqvarna Fleet Services[™] app, or back in storage via the Husqvarna Fleet Services[™] Gateway app. The combination of these apps gives you updated data that's automatically uploaded to the cloud-based account where you can access it from any device

ALL YOUR EQUIPMENT IN ONE PLACE

Don't rely on paperwork. With Husqvarna Fleet Services[™], you just check the inventory list, and you know exactly how many machines you have of each type. Give them unique names, and you can easily tell which is which. You can add sensors to all sorts of equipment, even machines from other manufacturers. By using tags, different machines can be categorised for different purposes. This could include "tagging" machines for different locations or to different teams.

SERVICE HISTORY AND NOTIFICATIONS

By using Husqvarna Fleet Services[™], you always have access to the service history for each piece of equipment, making it much easier to keep track of its status and troubleshoot in case of a breakdown. You can also get service reminders based on actual engine hours or calendar time, to make sure your equipment is always in great shape.

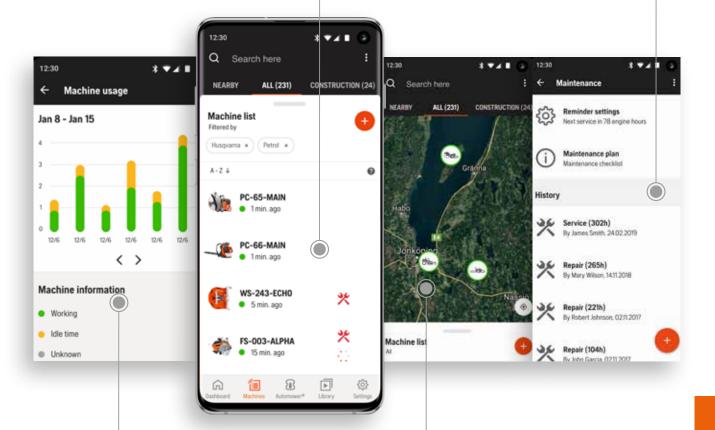

SEE WHEN AND HOW MUCH YOU'VE USED IT

Since the sensors track the engine hours of every machine, you can easily get an overview with Husqvarna Fleet Services[™]. You can produce a workday log with detailed information on how many hours they have been used every day.


TRACK THEM ALL ON THE MAP

Always keep track of where you last had your equipment. As soon as a machine with a sensor is within Bluetooth[®] distance from the app, its location is registered. So whenever you're looking for a machine, you just check the map to find out if it's in the storage, away for service or out working. The tag feature makes it possible to have grouped machines performing specific tasks within specific pre-set geographic locations.


+ INTEGRATED CONNECTIVITY

Selected 500 series battery and ride on machines feature a built-in connectivity module allowing easy connection to Husqvarna Fleet Services[™]. This allows you to see each machine's last known location, its usage statistics and service history – and much more without the need of a machine sensor. This also facilitates updates of the machine's firmware, so that it's always compatible with the latest functions in Husqvarna Fleet Services[™].

All 500 Series robotic mowers are supplied as standard with Husqvarna Fleet Services[™]. It gives you the possibility to monitor and control multiple numbers of mowers from your smart phone, tablet or laptop. You can overview your mower's status or exact location and adjust various settings. The digital tool also sends notifications and allows you to track the mower's position in case of theft – from anywhere.



MACHINE SENSOR KEY



RRP inc VAT



Specialist tool designed for opening and closing the machine sensor, for instance to change the battery.

Fits to	Order PNC	RRP ex VAT	RRP inc VAT
Machine sensor	585 47 76-01		

FIND OUT MORE POSSIBILITIES

Order PNC

584 91 89-05

MACHINE SENSOR

Fits to Machine

For more information on Husqvarna Fleet Services[™]. Visit www.husqvarna.com/uk/services/fleet-services

The machine sensor allows you to connect all sorts of hand held and

wheeled machines. This also includes products from other manufacturers.

RRP ex VAT





Visit: www.husqvarna.com/uk/services/fleet-services

THE PROFESSIONAL WAY TO MANAGE YOUR ROBOTIC MOWERS


When you invest in our 500 Series robotic mowers, you get access to Husqvarna Fleet Services[™] – a digital tool allowing you to easily monitor and control them from your smart phone, tablet or laptop. Just as easy as it should be.

FILTERS THAT MAKE YOUR MOWERS MORE EFFICIENT

Different mowers can be "tagged" to different teams, or to different locations, and then grouped for easier handling. The different user roles can also be tagged with different levels of control.

ALWAYS KEEP TRACK OF THEIR EXACT LOCATIONS

Want an overview of all your robotic mowers? Just check the map view. Thanks to the built-in GPS, you always know the exact location and status of every robotic mower. Use tags to issue commands to all mowers in specific areas for even easier fleet handling.

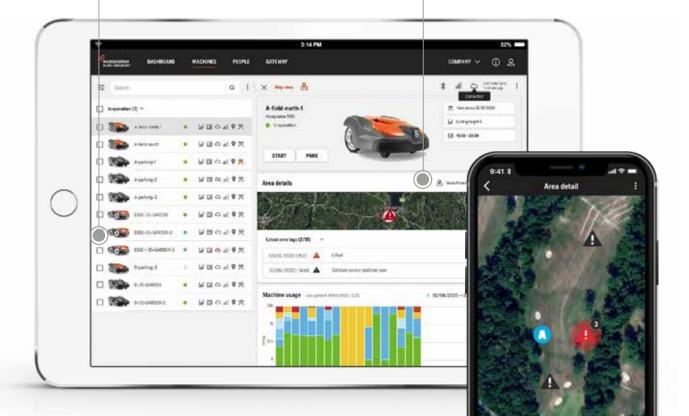

FULL CONTROL AND SCHEDULING FROM ANYWHERE

Forget manual controls. With Husqvarna Fleet Services[™], you – and only you – conveniently control your robotic mowers from anywhere. Perfect when you want to adjust the mowing schedule or cutting height, or park them before the storm arrives. And thanks to tagging, you can exert exact control over all your mowers, grouping them and issuing batch commands, directly from your smartphone app.

ALL YOUR EQUIPMENT IN ONE PLACE

If you want to, you can also connect the rest of your equipment to the system by using Husqvarna Fleet Services[™] sensors. Learn more at www.husqvarna.com/uk/services/fleet-services

OPERATIONAL INSIGHTS

Should anything happen, such as an unexpected standstill for one mower, you'll immediately receive a notification to your phone. Information about where problems occur and how often give you valuable insights to continuously adjust and improve the installation, which ensure a smooth and efficient operation. Through the Automower® Machine usage tab, you can review daily user data for more insights. The information is summarised in an easy and accessible way, helping you make your fleet usage more efficient and productive.

Outside working are

12:22 14/12/018

個

×

Ó

th.

HUSQVARNA SERVICE

DO THE DAILY CHECKS YOURSELF, LEAVE THE REST TO OUR EXPERTS

GINALDELAR

With over 300 Authorised Husqvarna dealers in the UK, you're never far from professional service and support using only Genuine Husqvarna spare parts, fuels and lubricants. Our dealers are the experts in keeping your machines running safe, smooth and strong.

For more information visit www.husqvarna.com/uk/support




lusqvarna

GET SERVICE NOTIFICATIONS FROM YOUR CONNECTED HUSQVARNA PRODUCTS

With the Husqvarna Connect app, you can get notifications to your smartphone when your connected products need a service. You can find the nearest Authorised Husqvarna dealer, make the call and even bookmark your favourite dealer directly in the app.

For more details see page 5 or visit www.husqvarna.com/uk







PROFESSIONAL SUPPORT FOR PROFESSIONAL DEMANDS

Your Authorised Husqvarna dealer can advise you on machinery and services to suit your needs. They can also supply you with Genuine Husqvarna spare parts, lubricants and accessories as well as adequate service and repair to keep your Husqvarna equipment ready for your next job. Our dedicated dealers provide professional services for your machines, to safeguard optimal performance and reliability. The Authorised Husqvarna dealer network consists of 25,000 locations worldwide, so we're never far away. See our interactive dealer locator on www.husqvarna.com/uk/dealer-locator.

KEEP YOUR MACHINES IN ORIGINAL SHAPE WITH GENUINE HUSQVARNA SPARE PARTS

Our product development always starts with you, the user, in focus, to make your work less strenuous and more efficient. This is also why every single part in a Husqvarna machine is rigorously tested to ensure it interacts optimally with all the other parts. This interaction produces the reliability and characteristics you have the right to expect from a Husqvarna, while proper servicing and using the right parts mean your equipment performs safely, reliably and economically in the long run. Genuine Husqvarna spare parts allow you to get the most out of your Husqvarna.





ENJOY OUR OFF-SEASON SERVICE OFFERS

It's wise to let your Authorised Husqvarna dealer do the service in the off-season period when your garden rests from growing and you can spare your equipment for a while. Look out for the off-season service offers and local pick-up /delivery services offered by your Authorised Husqvarna dealer. Don't forget to ask your dealer to register your product at your dealership to ensure special offers and information.

MINIMISE YOUR DOWNTIME WITH PREVENTIVE MAINTENANCE AND REPAIR

At our dealers, all servicing is done by authorised technicians. They are all specialists trained in the machines you are using. Many workshops have fixed prices for all forms of service - look out for our Service Menus at your local dealer. For each machine there is a detailed service plan, which is divided into a number of time intervals and presented to you in our Service Checklists. By maintaining your machines regularly and servicing them at the recommended times, you ensure the machines are performing optimally. You also minimise the risk of unexpected downtime. And, just as importantly, the machine will last longer.



+ ADD PERFORMANCE WITH HUSQVARNA ACCESSORIES



Why let poor equipment get in your way? Husqvarna accessories allow you to keep working – and delivering great results. By choosing Husqvarna accessories and lubricants from our extensive product range, you are guaranteed the same high quality throughout the lifespan of the product.

+ HUSQVARNA WARRANTY AND SERVICE

Consumer Use - Products and Accessories. Husqvarna provides a 24 month warranty for consumer use provided that the following conditions are met: Sale of Husqvarna products must be registered through intended applications in the Husqvarna Reseller Portal, or to its connected services The Husqvarna Product must have a proven service history in accordance with the product operator handbook/manual (where service instructions are provided).



Professional Use - Products and Accessories. Husqvarna provides a 12 month warranty for professional use provided that the following conditions are met: Sale of Husqvarna products must be registered through intended applications in the Husqvarna Reseller Portal, or to its connected services. The Husqvarna Product must have a proven service history in accordance with the product operator handbook/manual (where service instructions are provided).

Note! Battery warranty is handled separately, see your Husqvarna dealer for details

NEW Professional users now also have the option to purchase Husqvarna UpCare extended warranty and/or service plans.



EXPECT MAXIMUM PROTECTION - NO MATTER THE PERFORMANCE LEVEL

TECHNICAL EXTREME

 \bigwedge



LAYERED PROTECTION

Our advanced protective material comprises fewer layers. This makes it lighter, without compromising protection levels. The material and layering design consists of long fibres that can become tangled in the chain.



CONFIDENT SAFETY WITH REGULAR TESTING

TECHNICAL

Protective clothing for forestry work must carry CE marking. The additional EuroTest mark shows that randomly selected samples are regularly re-inspected by an accredited institute.



Good protective equipment must withstand demanding conditions and provide the required protection. That's why we use nothing but high-quality materials. Each job comes with different requirements. Our range of protective clothing takes into consideration every type of work. In fact, our extensive range of safety clothing, offering the latest innovations in design and materials, will provide you with the level of protection and comfort you need to get the job done.

FUNCTIONAL

CLASSIC






GRADED PROTECTION CLASS

All personal protection is ranked based on its ability to stop the chain at different speeds: Class 0 (16m/s), Class 1 (20m/s), Class 2 (24m/s) and Class 3 (28m/s). Tested and approved in accordance with European (CE) and International (ISO) standards.





 $\wedge \wedge$





WORKWEAR TWILL

The woven twill fabric has a reliable performance in workwear. It is resistant to tearing, stretching and stains, which gives it a high sturdiness. Available in our Classic range. 270 G/M². 65% POLYESTER / 35% COTTON.

WORKWEAR SHINE TWILL

The woven twill fabric has a reliable performance in workwear. It is resistant to tearing, stretching and stains, which gives it a high sturdiness. The shiny yarn in the fabric creates an appealing appearance. Available in our Classic range. 240 G/M². 70 % POLYESTER / 30 % COTTON.

PART-TIME USE

MICRO POLYESTER

CCASI

Our Micro Polyester is a plain woven fabric with a soft touch. It is resistant to tearing, stretching and stains. Available in our Functional range. 190 G/M². 100% POLYESTER.

CORDURA® HEAVY

Cordura[®] means durability without compromise. The fabric delivers high functionality and exceptional comfort. Our Cordura[®] Heavy is used on the most exposed areas of the garments — around ankles and wrists for example. The fabric has a Teflon[®] finish which helps repel water, oil and stains. Available in our Functional and Technical ranges. 220 G/M². 100% CORDURA[®].



CORDURA® LIGHT

Cordura® means durability without compromise. The fabric delivers high functionality and exceptional comfort in a lightweight fabric. Available in our Functional range. 175 G/M². 100% CORDURA® POLYAMIDE.

L-TIME USE

COMFORTABLE STRETCH

A 4-way stretch fabric that stretches in all directions, length-ways and across. The breathable fabric therefore gives you high movability in areas where it is needed, and provides comfortable movement. Available in our Technical range. 235 G/M². 92% POLYESTER /8% LYCRA®.



ARAMIDE MÉLANGE

A fibre composition combining abrasion resistant Kevlar® fibres and hardwearing Cordura® fibres, making our Aramide mélange a tough fabric used for reinforcements on exposed areas. Available in our Technical range. 240 G/M². 45% CORDURA®/ 30% POLYAMID / 25% KEVLAR® ARAMIDE.




CORDURA® REFLEX

Cordura[®] means durability without compromise. The fabric delivers the wear and tear resistance needed on the most exposed areas. The reflective yarn in the fabric gives high visibility in dark and dim conditions. Available in our Technical Extreme range. 3356/M^P, 100% POLYAMIDE.



CORDURA[®] CHECKERED

The fabric delivers the wear and tear resistance needed on the most exposed areas. Coated on the back for improved water resistance. Available in our Technical Extreme range. 225 G/M². 100% POLYAMIDE.



Our light 4-way stretch fabric stretches in all directions, length-ways and across. The breathable fabric therefore gives you high movability in areas where it is needed, and provides maximum comfort. Available in our Technical Extreme range. 190 G/M², 88% POLYESTER (14% POLYESTER COOLMAX®) / 12% ELASTANE (LYCRA®).



Our lightest fabric with 2-way stretch is used for areas in need of a great movability. The fabric gives freedom of movement and high comfort. Available in our Technical Extreme range. 185 G/M². 66% POLYESTER / 34% ELASTANE.

//\



FIND YOUR SIZE

FOREST JACKETS / STANDARD SIZES

SIZES		S	М	L	XL	XXL	XXXL
Male	Chest (inches)	36-38"	40-42"	44-46"	48-50"	52-54"	54-56"
SIZES		XS	S	М			
Female	Chest (inches)	31-34"	34-36"	36-39"			

PROTECTIVE TROUSERS

SIZES	44	46/48	50/52	54/56	56/60	62
MODEL	XS	S	М	L	XL	XXL
Height (cm)	170-176	170-176	176-182	176-182	182-188	188
Waist (inches) 31"		32-34"	35-36"	37-38"	39-40"	42"
Inside leg (inches) 31"		31.5"	32"	32.5"	33"	33"
				1		1
SHORT LEG		S-7cm	M-7cm	L-7cm	XL-7cm	
Height (cm)		165-171	171-177	177-177	177-183	
Waist (inches)		32"	35"	37"	39"	
Inside leg (inches)		26.5"	27"	27.5"	27.5"	
LONG LEG		S+7cm	M+7cm	L+7cm	XL+7cm	
Height (cm)		175-181	181-187	181-187	187-193	
Waist (inches)		32"	35"	37"	39"	
Inside leg (inches)		34"	34.5"	35"	35.5"	

Note: All measurements are body measurements, except the inner leg, which is a garment measurement. If a base layer is to be worn under the garment, it should also be worn when measuring. Chest: measured around the widest part of the chest. Height: from top to toe. Waist: measured around the waist. Inside leg: measured from crotch to desired length.

KEEP YOUR SAFETY CLOTHING SAFE

WASHING GUIDE

Your protective clothes are regularly exposed to sweat and oil. These substances can reach the protective layer, reducing its functionality. This is why you need to wash your clothes regularly and in accordance with their labelling. If your clothes get heavily soiled, you should wash them as soon as possible after use.



Wash the garment regularly in accordance with the instructions on the inside labelling.



After washing, the garment should be stretched prior to drying. Air dry slowly.



Clean the garment immediately if it has been subjected to petrol, oil, grease or other flammable materials. Fire hazard!




Machine wash. For temperature, see inside labelling.



Do not wash your protective clothes inside out. Also, do not bleach, dry clean, or tumble dry. Iron with low heat.



Keep the garment away from sharp objects, acids, oils, solvents, fuels and animal droppings.

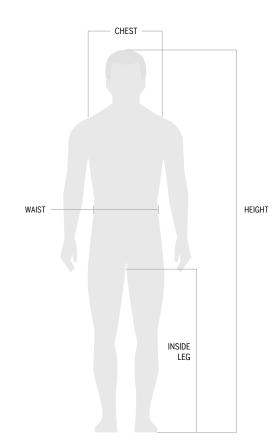

REPAIR GUIDE

In addition to washing and cleaning your protective wear, you also need to check for heavily worn areas, damages and tears in the fabric. The protective functions may be seriously reduced if repairs are not carried out properly. Use the guide below for reference, and always consult your dealer if in doubt.



If a repair to the outer material is being made, do not sew into the protective material as this can reduce its protective qualities.



The garment should be scrapped and not used again if the protective material has been: damaged, incorrectly washed, or altered from its original shape.



Damaged outer material must be repaired immediately in order to prevent the protective material becoming damaged.



Adhesive must not be used when carrying out repairs as it may affect the protective material and reduce its protective qualities.



This product is no substitute for the operation of a chainsaw and does not provide total protection.

Cut-retardant apparel and materials are subject to a certain degree of aging. In professional logging, the maximum period of usage is considered to be about 12 months. In non-professional or occasional use, up to 5 years is considered acceptable.



CLASSIC – OCCASIONAL USE





PROTECTING THE PROTECTION The saw protection pad is completely covered, so saw dust doesn't compromise the performance of the fibre layers.



REINFORCED FOR DURABILITY The lower part of the protection pad on the inside of the trousers is reinforced to protect the saw protection from wear and ensures high durability.



KEEP COOL The jacket has a full-length front zip and an open yoke at the back. The ventilation zips at the back of the legs let you adjust the airflow.

PROTECTIVE PERFORMANCE CLOTHING BY HUSQVARNA

The Husqvarna Classic range is intended for occasional use and is designed with the domestic user in mind at an affordable cost. It offers the highest quality and reliability you expect from Husqvarna.

Ideal for lighter tasks such as:

- Cutting firewood
- Felling smaller trees
- General property maintenance
- Pruning
- Carpentry work



ZIPPED POCKETS For easy access to your belongings, the jacket comes with two zipped front pockets as well as a chest pocket.





CLASSIC FOREST JACKET



Size (chest) 46 for 36-38" 50 for 40-42" 54 for 44-46" 58 for 48-50" 62 for 52-54"

Made from high-quality polyester/cotton twill with hi-viz orange panels and reflective logos. Cuff buttons allow a tighter fit when operating a chainsaw in cooler weather.

CLASSIC FOREST HIGH VIZ JACKET



Size (chest) 46 for 36-38" 50 for 40-42" 54 for 44-46" 58 for 48-50" 62 for 52-54" 66 for 54-56"

Comfortable design made from high-quality polyester/cotton twill. The visibility is tested to EN ISO 20471 Class 3 (the highest standard), making it fully approved for use at the roadside as well as in the forest.

Order PNC 582 33 51-XX RRP ex VAT RRP inc VAT

Order PNC 596 30 46-XX

RRP ex VAT RRP inc VAT

CLASSIC PROTECTIVE TROUSERS 20A



Size (waist) 44 for 31" 54 for 37" 46 for 32" 56 for 38" 48 for 34" 58 for 39" 50 for 35" 60 for 40" 52 for 36" 62 for 42"

Made from tough polyester/ cotton twill in a regular fit. The saw protection pad is reinforced on the lower inside to withstand wear and tear from boots. With ruler pockets, zipped front pockets and Husqvarna logo on lower back leg.

TYPE A, CLASS 1

 RRP ex VAT
 RRP inc VAT

 £83.33
 £99.99

CLASSIC PROTECTIVE CHAPS 20A



Order PNC

529 51 98-01

With Metal Clips

RRP ex VAT

One size

Quick and easy to pull on and off, these chaps provide occasional chainsaw users with reliable protection and convenience. With full length zip fastenings at back and waist belt with adjustable height and waist. The saw protection pad is reinforced inside.

TYPE A, CLASS 1

 RRP ex VAT
 RRP inc VAT

 £91.66
 £109.99

ACTIVE CLEANING DETERGENT

595 00 14-XX

Waist Trousers



RRP ex VAT

Phosphate free and biodegradable. For clothing and is also effective for cleaning chains, garden machines, air filters and more.

> Order PNC 583 87 69-01 RRP inc VAT

BRACES



Extra wide with adjustable length.

Order PNC

505 61 85-10

505 61 85-00

RRP inc VAT



FUNCTIONAL – PART-TIME USE





REINFORCED FOR DURABILITY The lower part of the protection pad on the inside of the trousers is reinforced to protect the saw protection from wear and ensure high durability.



ADJUST FOR PERFECT FIT The elastic drawstring with a cord lock at the waist allows you to easily tighten or loosen the jacket for improved fit.



WELL VENTILATED Openings at the yoke make for good ventilation. Zips under the arms and at the back of the legs let you adjust the airflow to your liking.

PROTECTIVE CLOTHING MADE FOR FUNCTIONAL PERFORMANCE

The Husqvarna Functional range is intended for frequent use in more demanding conditions. Tough, resistant fabrics, effective ventilations and smart design features help you handle any task at hand.

Ideal for applications including:

- Farm and estate maintenance
- Heavy duty firewood cutting
- Agriculture



REINFORCED FOR TOUGH USE The elbows, wrists and the front of the trousers are made of Cordura[®], and the lower part of the trousers has been reinforced to withstand tough use.



FUNCTIONAL FOREST JACKET



Order PNC

582 33 14-XX

Size (chest) 46 for 36-38" 50 for 40-42" 54 for 44-46" 58 for 48-50" 62 for 52-54"

Made from high-quality 100% micro polyester, with Cordura® reinforcement around the wrists with snap button adjustment. Elastic string at the waist and bottom ensures perfect fit. Ventilation zips and reflex bands help you stay comfortable and safe.

RRP inc VAT **RRP** ex VAT

FUNCTIONAL PROTECTIVE TROUSERS 20A



Item

Waist Trousers Carpenter Trousers

Size (waist) 46 for 32" 56 for 38" 48 for 34" 58 for 39" 50 for 35" 60 for 40" 52 for 36" 62 for 42" 54 for 37"

High-quality fastenings provide good fit, while ventilation zippers, ruler pocket, reflex tapes and extra Cordura® reinforced knees and ankles ensure safety, productivity and comfort. With Husqvarna logo on the back lower leg. Fulfils EN 381 Class 1 (20m/s).

TYPE A. CLASS 1

RRP ex VAT RRP inc VAT 595 00 08-XX 596 30 45-XX

FUNCTIONAL PROTECTIVE TROUSERS 24A



 24_{10}

Order PNC 595 00 10-XX Size (waist) 46 for 32" 50 for 35" 54 for 37" 58 for 39" 62 for 42"

With saw protection in Class 2, (24m/s). High-quality fastenings provide good fit, while ventilation zippers, ruler pocket, reflex tapes and extra Cordura® reinforced knees and ankles ensure safety, productivity and comfort. With Husqvarna logo on the back lower leg.

TYPE A, CLASS 2

RRP ex VAT RRP inc VAT

FUNCTIONAL PROTECTIVE CHAPS

Order PNC



Order PNC Small 529 88 00-001 Medium 529 88 00-02 Large 529 88 00-03

Comfortable protective chaps designed for occasional chainsaw work in all weather conditions. Easy to put on and wear over your work trousers. The fit of the waist and legs can be easily adjusted with straps and buckles, and hook-and-loop fastening on the calves. Cordura® reinforcements on knees and ankles add more durability.

NEW

TYPE A, CLASS 1

RRP inc VAT **RRP** ex VAT

FUNCTIONAL PROTECTIVE KIT





Order PNC 529 52 01-01 Kit containing the basic protective equipment that is needed when using a chainsaw. Includes Functional Protective Chaps (size medium) with Type A, Class 1 protection, Functional Gloves and Classic Forest Helmet.

RRP ex VAT RRP inc VAT



ŃΛ



TECHNICAL – FULL-TIME USE



PROTECTIVE CLOTHING MADE FOR PROFESSIONAL PERFORMANCE

The Husqvarna Technical range is designed and built to perform all day every day for professional users. Task-optimised design meets modern styling, while tough, light stretch fabrics, reinforced panels and pre-bent knees and elbows offer high resistance, durability and performance.

Ideal for applications including:

- Forestry
- Logging
- Horticulture
- Arboriculture



PRE-BENT KNEES The knees are pre-bent and have been tailored to offer maximum mobility without compromising safety.



ADJUST FOR PERFECT FIT The clothes come with elastic drawstrings at the waist and at the lower bottom of the jacket, allowing you to adjust your gear for a perfect fit.



STRETCH FOR COMFORT Where needed, the clothes are made of stretch fabric, allowing you to move freely, safely and comfortably.



WELL VENTILATED Openings at the yoke and the lower back make for good ventilation. Zips under the arms and at the back of the legs let you adjust the airflow to your liking.



REINFORCED WHERE YOU NEED IT The knees, elbows, ankles and wrists have been reinforced to withstand tough use and make your clothes last longer.



EASY-ACCESS POCKETS

The jacket has two pockets on the chest and a dedicated first-aid pocket. The trousers feature two front pockets, two back pockets, a leg pocket and a double ruler pocket.

298

 \wedge





TECHNICAL FOREST JACKET



Order PNC

582 33 21-XX

TECHNICAL VENT JACKET

Size (chest) 54 for 44-46" 46 for 36-38" 58 for 48-50" 50 for 40-42" 62 for 52-54"

Tough yet lightweight four-way stretch polyester with pre-bent sleeves ensures comfortable movement and reduced effort. Ventilation openings on the voke and lower back, padded chest pocket and zip sleeve adjustment. With Aramide and Cordura® reinforcements.

> RRP ex VAT RRP inc VAT

TECHNICAL ARBOR 20 JACKET



Size (chest) 54 for 44-46" 46 for 36-38" 50 for 40-42"

58 for 48-50"

With EN381 Class 1 (20m/s) cut protection. A crafted fit made from two-way stretch polyester with Aramide and Cordura® reinforcements. Enforcements from elbow to wrist, Velcro® adjustments at the end of the sleeves and elastic string at the waist and bottom gives all-day durable performance.

Order PNC 594 99 88-XX

TECHNICAL HIGH VIZ JACKET

RRP ex VAT RRP inc VAT



Long

Short

(+ 7cm leg)

(-7cm leg)

NEW

SHORTER LEG

AVAILABLE

Size (chest) 54 for 44-46" 46 for 36-38" 58 for 48-50" 50 for 40-42" 62 for 52-54"

Size (waist)

54 for 37"

Designed for forest work in warmer conditions, the jacket is made from 100% knitted polyester under the arms and features pre-bent sleeves and a tight fit for working in the forest. With thin elastic bands around the waist and wrists.

Order PNC 582 33 43-XX

TECHNICAL PROTECTIVE TROUSERS 20A

```
RRP ex VAT
```

RRP inc VAT Order PNC



Size (chest)	54 for 44-46"
46 for 36-38"	58 for 48-50"
50 for 40-42"	62 for 52-54"

Tough, yet lightweight make this jacket ideal for everyday work in environments where visibility matters. Conforming to EN ISO20471 Class 3, it's made from lightweight stretch polyester, two-way ways on the front and four-ways on the back, with crafted fit.

596 30 37-XX

RRP ex VAT RRP inc VAT

TECHNICAL PROTECTIVE TROUSERS HI-VIZ 20A



Size (waist) 46 for 32" 58 for 39" 50 for 35" 62 for 42" 54 for 37"

For work along the roads or where you need more visibility. 4-way stretch where needed allows you to move freely, safely and comfortably. The pre-bent legs offer maximum mobility, the reflective straps high visibility and increased safety, whereas the reinforced knees and legs provide durability during tough use. Approved according to EN 381 class 1 (20m/s) and EN ISO 20471 class 2.

TYPE A, CLASS 1

RRP ex VAT RRP inc VAT

595 08 72-XX

TECHNICAL ROBUST TROUSERS 20A



Size (waist) 46 for 32" 58 for 39" 50 for 35" 62 for 42"

reinforcements on crotch in Aramide stretch and Cordura® around ankles. Tick protection around ankles and stretch fabric on trouser back ensures comfort and productivity. Fulfills EN 381 Class 1 (20m/s).

> RRP ex VAT RRP inc VAT



45 for 32" S

Order PNC 594 99 90-XX

TECHNICAL PROTECTIVE TROUSERS 20C



Size (waist) 46 for 32" 58 for 39" 50 for 35" 62 for 42" 54 for 37"

Type C trousers in grey colour way design. Lightweight with extended back, ventilated back pockets with Cordura® and Aramide reinforcements and a reinforced crotch. With Husqvarna logo on lower back leg. Fulfils EN 381 Class 1 (20m/s).

TYPE C, CLASS 1

595 00 07-XX

RRP inc VAT RRP ex VAT



54 for 37"

Dyneema® fabric on the front and





 Λ

RRP inc VAT

594 99 86-XX

Order PNC



TECHNICAL EXTREME – FULL-TIME USE





ADJUST FOR PERFECT FIT

The clothing comes with hook and loop wrist and ankle strap as well as elastic drawstrings at the waist and at the lower bottom of the jacket, allowing you to adjust your gear for a perfect fit.



KEEP YOUR TROUSERS IN PLACE Attach the boot hook on the inside of the cuff to your laces, to keep them tightly secured.



BRACES INCLUDED The trousers come with quality braces, so they stay safely and comfortably in place all day.



WELL VENTILATED

Openings at the yoke and the lower back make for good ventilation. Zips under the arms and at the back of the legs let you adjust the airflow to your liking.



EASY-ACCESS POCKETS

The jacket has two pockets on the chest, one on the sleeve, and a dedicated first-aid pocket. The trousers feature two front pockets, two back pockets, a leg pocket and a double ruler pocket.



POCKETS FOR YOUR MOBILE PHONE The chest pockets have a padded lining for your mobile phone, keeping it well protected and within easy reach at all times.

PROTECTIVE CLOTHING MADE FOR MAXIMUM PERFORMANCE

Husqvarna Technical Extreme is our ultimate range of protective clothing. Designed for full-time intensive use in the most demanding conditions. The Technical Extreme range has been developed solely to maximise your performance offering lightweight comfort, breathability and protection. With pre-bent knees, sleeves and a slim fit in durable stretch fabrics, the garments' smart, trade specific design enables maximum performance all day, every day.

Ideal for applications including:

- Professional forestry
- Logging
- Arboriculture

 \wedge



TECHNICAL EXTREME PROTECTIVE TROUSERS 20A

TECHNICAL EXTREME FOREST JACKET



Male

Female

Size Male Size Female (chest) 42 for 31-34" 46 for 36-38" 46 for 34-36" 50 for 40-42" 50 for 36-39" 54 for 44-46" 58 for 48-50" 62 for 52-54"

Lightweight, breathable fabrics with pre-bent elbows and padded chest pocket, zipped sleeve pocket and Velcro® adjustable cuffs. The Technical Extreme Forest Jacket features high visibility fabrics and reflex bands in a slim fit. Available in both male and female sizes.

RRP ex VAT RRP inc VAT Order PNC 582 33 10-XX

582 34 07-XX



Order PNC 594 99 68-XX

Size (waist) 42 for 30" 62 for 42" 46 for 32" 50 for 35" 54 for 37" 58 for 39"

Slim fit with lightweight stretch and Cordura® reinforcement in critical areas. With Tech-Knee and ventilation openings which provide protection and durability. With an adjustable waist, reflex tapes and Husqvarna logo on lower back leg. Fulfils EN 381 Class 1 (20m/s).

TYPE A, CLASS 1

RRP ex VAT

RRP inc VAT

TECHNICAL EXTREME PROTECTIVE ARBOR TROUSERS 20A



Order PNC 595 2177-XX

Size (waist) 42 for 30" 54 for 37" 46 for 32" 58 for 39" 50 for 35" 62 for 42"

Designed for the challenges of climbing and working in trees, the Technical Extreme Arbor trouser offers a combination of safety, agility and function. With strong and light Dyneema®, Cordura® and Kevlar® reinforcements it is made to withstand wear in areas most needed. The design combines the key features of the Technical Extreme range with features adapted to the needs of arborists to fit with climbing gear. Size S-XL. EN381 TYPE A, CLASS 1

> RRP inc VAT **RRP** ex VAT



EXTENDED LEG

An extra three centimetres has been added to make sure the trouser stays over the boot when climbing, for protection and comfort.

EASY ACCESS POCKETS

Side pockets with reversed zips for easy access when wearing harness, and double thigh pockets with loops for storage.



ADDED PROTECTIVE LAYERS

The Tech-Knee provides excellent saw protection, thanks to the additional fibre layers. This improves safety, especially in situations where the trousers fit tight to the knee.

WATER REPELLENT

The knee has a water-resistant inner lining and an outer layer made of water-repellent fabric, keeping water and moisture from penetrating the saw protection layers. This means you can work comfortably in wet conditions for a longer time.

PRE-BENT FABRIC

The complete knee, including the waterproof layers and saw protection fabric, has been pre-bent to ensure a perfect fit in all working positions.





14



TECHNICAL FOR BRUSHCUTTING



597 66 02-XX (High visiblity) 597 24 59-XX

TECHNICAL BRUSHCUTTING/TRIMMING JACKET



High visibility version available, approved according to EN ISO 20471 Class 3.

Order PNC

Size (chest) NEW 42 for 32-34" 46 for 36-38" 58 for 48-50" 50 for 40-42" 62 for 52-54" 54 for 44-46"

Designed for working long hours with a harness. Place for extra padding to relieve the shoulders Easy to reach pockets. Ventilation zippers on the front under the arms and a yoke in the back keep the temperature at a comfortable level. The 4-way stretch fabric on the back together with a new arm construction and ergonomically pre-bent arms offers high movability.

> RRP ex VAT RRP inc VAT

TECHNICAL BRUSHCUTTING/TRIMMING TROUSERS



High visibility version available, approved according to EN ISO 20471 Class 2.

Order PNC 597 66 06-XX (High visiblity) 597 24 62-XX







Size (waist) NEW 42 for 31" 54 for 37" 46 for 32" 56 for 38" 48 for 34" 58 for 39" 50 for 35" 60 for 40" 52 for 36"

Designed for working long hours with a brushcutter or trimmer. Place for extra padding to relieve the hip. Water repellent material on the front and side of the legs Reinforcement on exposed areas increases durability and lifespan. Ventilation zippers placed on the back at the legs help to keep the temperature on a comfortable level. The ergonomically pre-bent knees otter high movability

> RRP inc VAT RRP ex VAT

EXTRA REINFORCEMENT

Shoulder and hip reinforcement for increased durability when using a harness all day.

WELL-VENTILATED

Ventilation zips under the arms and on the back of the trouser legs for a comfortable temperature.

PRE-BENT

Trouser knees with Cordura® reinforcements for durability. A water repellent material in front and on the sides of the legs with padded protection.

SPECIALLY DESIGNED FOR CLEARING AND GARDEN WORK

Wearing a harness while working long hours with a brushcutter puts specific demands on the clothes to be comfortable and functional. Our brushcutter and trimmer clothing offers practical details in the right places, like padded shoulders and hips and ventilation zips for durable protection whilst you work.

Ideal for applications including:

- Trimming / brushcutting / hedge trimming
- **Grounds maintenance**
- Non chainsaw applications

Visit: www.husqvarna.com/uk/ppe

 \wedge





FEMALE SIZES AVAILABLE Size 42 for X Small 46 for Small 50 for Medium 54 for Large 58 for X Large 62 for XX Large

NEW

High-quality rain jacket with reinforced exposed areas. Water-repellent yet breathable thanks to laminate and taped seams. Made from durable polyester with mechanical stretch. Detachable hood, adjustable waist, pockets feature waterproof zip. EN ISO20471 Class 3 & EN343.

Order PNC	RRP ex VAT	RRP inc VAT
597 66 26-XX (mens)		
536 93 02-XX (womens)		

FUNCTIONAL RAIN JACKET HI-VIZ



Size 42 for X Small 46 for Small 50 for Medium 54 for Large 58 for X Large

Polyester knitting, durable one-sided PU coating with welded seams. Enables airflow in the jacket for long working hours. EN ISO 20471 Class 3 EN343.

Order PNCRRP ex VATRRP inc VAT597 66 28-XX

FUNCTIONAL RAIN BACK PROTECTOR - ONE SIZE



Back Protector made from a polyester knitting with a durable one-sided PU coating with welded seams. Designed for working positions while operating with a chainsaw. EN343. One size.

Order PNCRRP ex VATRRP inc VAT597 66 32-10

TECHNICAL RAIN VENT TROUSERS



Size 42 for X Small 46 for Small 50 for Medium 54 for Large 58 for X Large 62 for XX Large

High-quality rain trousers, durable laminated polyester fabric with mechanical stretch, taped seams, reinforcement fabric over the areas from above the knee and lower inside leg. Elastic hem at back with hook and loop attachments on the sides for easy adjustment and perfect fit. EN343.

Order PNC	RRP ex VAT	RRP inc VAT
597 66 27-XX		

FUNCTIONAL RAIN TROUSERS HI-VIZ



Size 42 for X Small 46 for Small 50 for Medium 54 for Large 58 for X Large

Rain trousers made from a polyester knitting with a durable one-sided PU coating with welded seams. Zippers at the side for easy access. EN ISO 20471 Class 2 and EN343.

Order PNCRRP ex VATRRP inc VAT597 66 29-XX

Size

42 for X Small

50 for Medium

58 for X Large

62 for XX Large 66 for XXX Large

46 for Small

54 for Large

FUNCTIONAL RAIN CHAPS HI-VIS - ONE SIZE



Rain chaps made from a polyester knitting with a durable one-sided PU coating and welded seams. Attached to a belt or a tool belt. EN ISO20471 Class 1 and EN343. One size.

Order PNCRRP ex VATRRP inc VAT597 66 33-10

TECHNICAL WORK T-SHIRTS



Light and cool, with zipped front, extended back and easy-access zipped front pocket. It transports moisture away from the body and dries quickly. Available in long and short sleeves. Technical Hi-Viz T-Shirt features additional reflective tape and is tested and approved to ISO EN 20471 (Class 2).

Order PNC 597 66 11-XX 597 66 12-XX 596 30 39-XX 596 30 38-XX

RRP ex VAT	RRP inc VAT

🛞 www.youtube.com/HusqvarnaUK





A soft and comfortable shirt for work or leisure. Made of 100% pre-shrunk cotton.

Order PNCRRP ex VATRRP inc VAT578 78 57-XX

AN A



FOOTWEAR



PROTECTIVE **FOOTWEAR** FOR MAXIMUM **COMFORT AND STABILITY**

We offer a comprehensive range of foot protection. Close co-operation with professionals forms the basis of the research and development behind our purpose designed footwear.

All protective footwear is VAT exempt.

SIZE AVAILABILITY

Variant - UK size	ТРВ	C20 / FB24	T24	F24	F28
36 - 3.5	•		•		
37 - 4	•		•	•	•
38 - 5	•		•	•	•
39 - 5.5	•	•	•	•	•
40 - 6.5	•	•	•	•	•
41 - 7.5	•	•	•	•	0
42 - 8	•	•	•	•	•
43 - 9	•	•	•	•	•
44 - 9.5	•	•	•	•	•
45 - 10.5	•	•	•	•	•
46 - 11	•	•	•	•	•
47 - 12	•	•	•	•	•
48 - 13			•		•
49 - 13.5					•

WITH SAW PROTECTION

CLASSIC 20 CHAINSAW LEATHER BOOTS (C20)



Lightweight and robust leather boots with reinforced toe and heel. The removable soles are washable. With saw protection 20m/s.

RRP ex VAT

Order PNC 597 65 94-XX

TECHNICAL 24 CHAINSAW LEATHER BOOTS (T24)



With composite toe cap. Made of nylon mesh and high quality leather Sympatex® membrane, the boots are 100% waterproof. With saw protection 24m/s.

Order PNC	RRP ex VAT
597 65 92-XX	

FUNCTIONAL 28 RUBBER CHAINSAW BOOTS (F28)



Class 3 (28m/s) saw protection. Features include steel toe cap, ankle protection, heel ridges and non-slip sole. Can fit studs.

Order PNC	RRP ex VAT
595 00 24-XX	

FUNCTIONAL 24 CHAINSAW LEATHER BOOTS (FB24)



Water repellent, lightweight with reinforcements for increased support TE-POR membrane keeps the feet dry and Vibram® sole. With saw protection 24m/s.

> Order PNC 597 65 93-XX

RRP ex VAT

FUNCTIONAL 24 RUBBER CHAINSAW BOOTS (F24)



Class 2 (24m/s) saw protection. Features include steel toe cap, ankle protection, heel ridges and non-slip sole. Can fit studs.

Order PNC	RRP ex VAT
595 00 28-XX	

WITHOUT SAW PROTECTION

TECHNICAL PROTECTIVE BOOTS (TPB)



Made from high quality waterproof leather/nylon mesh. The Sympatex membrane makes the boots 100% waterproof, with pull strap at the tongue and back of the boot.

Order PNC	RRP ex VAT
597 65 95-XX	

FOOTWEAR ACCESSORIES

Item Studs (50 pcs, inc stud key) Boot Laces

Order PNC RRP ex VAT RRP inc VAT 587 25 81-01 579 30 10-01

PROTECTIVE LEATHER BALM 200ml

Perseveres the leather, keeps it soft and comfortable and gives it a water and dirt repellent surface. Use it on your leather boots and gloves. Contains wool fat, beeswax, Vaseline® and mink oil.

RRP ex VAT





NEW

 Λ

Visit: www.husqvarna.com/uk/ppe

Order PNC

590 65 22-01



WORK GLOVES



GLOVES THAT MATCH YOUR REQUIREMENTS

We offer the latest in gloves, specially designed for every type of work. Gardener, forestry worker or arborist? You decide what you need for the work you are doing. Our range of gloves covers every requirement.

WITHOUT SAW PROTECTION

FUNCTIONAL



Variant - cm	(palm width)	
07 – 7cm,	09 – 9cm,	12 – 12cm
08 – 8 cm,	10 – 10cm,	

Protective gloves for all-year landscaping and forestry work.

Order PNC RRP ex VAT RRP inc VAT 599 64 98-XX

FUNCTIONAL LIGHT NON-SLIP



Variant - cm (palm width) 07 - 7cm. 09 - 9cm. 08 - 8cm, 10 - 10cm

Protective gloves for all-year landscaping and forestry work. Provides excellent grip even in wet conditions.

Order PNC RRP ex VAT RRP inc VAT 529 88 02-XX

FUNCTIONAL GRIP WINTER



Variant - cm (palm width) 08 - 8cm, 10 - 10cm, 09 - 9cm. 12 - 12cm

Protective gloves designed for all-year landscaping and forestry work in cold and wet weather. Provides excellent grip.

Order PNC RRP ex VAT RRP inc VAT 529 88 04-XX

FUNCTIONAL LIGHT COMFORT



Variant - cm (palm width)			
06 – 6cm,	08 – 8 cm,	10 – 10cm,	
07 – 7cm,	09 – 9cm,	12 – 12cm	
Protective gloves for all-year landscaping and			

forestry work, with additional comfort features.

Order PNC RRP ex VAT RRP inc VAT 599 64-94-XX

FUNCTIONAL LIGHT VENT



Variant - cm (palm width) 07 - 7cm, 09 - 9cm, 08 - 8cm, 10 - 10cm

TECHNICAL

Variant - cm (palm width)

09 - 9cm,

Thin, ventilated protective gloves designed for all-year landscaping and forestry work in warm and dry weather.

Order PNC RRP ex VAT RRP inc VAT 529 88 01-XX

FUNCTIONAL WINTER



Variant - cm (palm width) 08 - 8cm. 10 - 10cm. 12 - 12cm

Warm, comfortable protective gloves designed for all-year landscaping and forestry work in cold and wet weather.

> RRP ex VAT RRP inc VAT Order PNC 599 64 97-XX

forestry work.

Comfortable protective gloves designed for

10 - 10cm,

Order PNC RRP ex VAT RRP inc VAT 599 65 03-XX

 \wedge

12 - 12cm

(f) www.facebook.com/HusqvarnaUK



WORK GLOVES



GLOVES THAT MATCH YOUR REQUIREMENTS

We offer the latest in gloves, specially designed for every type of work. Gardener, forestry worker or arborist? You decide what you need for the work you are doing. Our range of gloves covers every requirement.

TECHNICAL LIGHT



Variant - cm (palm width)		
08 – 8cm,	10 – 10cm,	
09 – 9cm,	12 – 12cm	

Comfortable protective gloves designed for forestry work.

Order PNC	RRP ex VAT	RRP inc VAT
599 65 11-XX		

TECHNICAL GRIP



Variant - cm *(palm width)* 07 - 7cm, 09 - 9cm, 12 - 12cm 08 - 8cm, 10 - 10cm,

Comfortable protective gloves designed for forestry work in warm weather. Provides good tactile sensitivity - ideal for climbing.

Order PNC	RRP ex VAT	RRP inc VAT
529 88 03-XX		

WITH SAW PROTECTION

FUNCTIONAL 16 GLOVES



Variant - cm *(palm width)* 07 - 7cm 09 - 9cm 12 - 12cm 08 - 8cm 10 - 10cm

Class 0 (16/ms) chainsaw protection.

Comfortable protective gloves designed for chainsaw work. Palm made of durable, naturally water-resistant goat leather. Designed with nylon neoprene knuckles and foam-laminated spandex fabric on the back for maximum comfort. Index finger with touch screen-friendly knuckle allows the use of your smartphone with gloves on. The knitted cuff adds comfort and makes the glove easy to put on. A patch on the thumb provides better grip and higher durability.

Order PNC RRP ex VAT RRP inc VAT 599 65 16-XX

TECHNICAL 20 GLOVES



Variant - cm (*palm width)* 08 - 8cm 09 - 9cm 10 - 10cm

Class 1 (20m/s) chainsaw protection.

Comfortable protective gloves designed for chainsaw work. Palm made of durable, naturally water-resistant double crust goat leather. Seams with double thumb stitching follow your hand shape. Back made of laminated spandex fabric for maximum comfort. Index finger with touch screen-friendly knuckle allows the use of your smartphone with gloves on. The hook-and-loop closure ensures tight fit and high movability.

Order PNC RRP ex VAT RRP inc VAT 599 65 12-XX

//\



HEAD, FACE AND EAR PROTECTION

YOUR HEAD, EYES AND EARS DESERVE PROFESSIONAL PROTECTION

Extensive research, technological product development as well as close, long lasting co-operation with professional users allows us to offer an excellent combination of ergonomically designed equipment.

All protective helmets are VAT exempt.





CLASSIC FOREST HELMET



Helmet with six-point plastic harness and one-hand adjustable slip ratchet. The harness depth is also adjustable in three steps for individual fit. The hearing protectors are developed for optimal ergonomics, and a metal mesh visor that provides good protection and good visibility.

Order PNC	SNR 🔊	RRP ex VAT
580 75 43-01	27dB	

FUNCTIONAL FOREST HELMET



High specification helmet with 6-point harness for comfort and less pressure. It features the UltraVision visor with only 20% light reduction giving a clearer view and ergonomic hearing protectors.

Order PNC	SNR 🔊	RRP ex VAT	Order Pl
576 41 24-02	26dB		585 05 84
576 41 24-01 Fluorescent Orange	26dB		

TECHNICAL FOREST HELMET



Lightweight and well ventilated- an ergonomically exceptional helmet for foresters packed with smart solutions that lessen the weight, enable a more personal fit and ensure a better head temperature even during long shifts. It also offers an improved field of vision and a headlamp slot.

Order PNC	SNR 🔊	RRP ex VAT
585 05 84-01	26dB	

SPIRE VENT ARBORIST HELMET



The Husqvarna Spire Vent arborist helmet is designed for the professional arborist who requires convenience and style at work without compromising safety and protection. The Spire Vent helmet is lightweight and well ventilated for maximum comfort. It has a universal fit and a wheel ratchet for easy size adjustment. Also equipped with attachments for mounting headlamps, ear muffs and visors. Compatible with Husqvarna ear muffs and three Husqvarna visor styles, including clear, mirror and smoke (all sold separately). Fulfills European standard EN 12492 for work at heights.

	Item	Order PNC	RRP ex VAT	RRP inc VAT
1	Spire Vent Arborist Helmet	597 68 18-01		
2	Clear Visor for Sprire Vent	598 86 23-01		
3	Smoke Visor for Sprire Vent	598 86 23-02		
4	Mirror Visor for Sprire Vent	598 86 23-03		
5	Hearing Protection Standard	587 44 24-01		
	Hearing Protection Adaptor*	599 29 72-01		
	*Required to fit hearing protection			
	Visor Adapter*	599 38 90-01		
	*Required to fit visor			

M

METAL MESH VISOR

VISOR FOR TECHNICAL HELMET



Etched visor with low light reduction and improved design that encloses the face for extended protection from all directions. Will fit Technical Forest helmet only.

Order PNC	RRP ex VAT	RRP inc VAT
586 40 96-01		

NYLON MESH VISOR

Fits all our helmets and hearing protectors.

RRP ex VAT RRP inc VAT

Excluding Technical Forest helmet.

Order PNC

505 66 53-19

HYGIENE KITS

ULTRAVISION VISOR



Light reduction is only 20% over the whole mesh area. Less sensitive for water to stick on the mesh and permanent deformation.

Order PNC	RRP ex VAT	RRP inc VAT
574 61 35-01		

PERSPEX VISOR



Fits all our helmets and hearing protectors. Excluding Technical Forest helmet.

Order PNCRRP ex VATRRP inc VAT505 66 53-43



RRP ex VAT RRP inc VAT

Fits all our helmets and hearing protectors.

Excluding Technical Forest helmet.

Order PNC

505 66 53-21



Scratch-resistant polycarbonate visor with anti-fog treatment inside. For all our helmets and hearing protectors. Excluding Technical Forest helmet.

Order PNCRRP ex VATRRP inc VAT505 66 53-63

HELMET TYPE	PNC	DESCRIPTION
Functional Forest Helmet	575 55 76-02	Harness Assy
Functional Forest Helmet	575 55 73-01	Sweatband Assy
Functional Forest Helmet	5821704-01	Chin Strap
Functional Forest Helmet	578 17 98-01	Sun Peak
Functional Forest Helmet	505 66 53-28	Visor Holder
Functional Forest Helmet	505 67 53-40	Holder for Hearing Protectors
Technical Forest Helmet	586 40 96-01	Visor
Technical Forest Helmet	587 26 30-01	Link Arm Kit
Technical Forest Helmet	582 05 50-02	Ratchet Kit Front
Technical Forest Helmet	587 25 32-01	Ratchet Wheel Kit
Technical Forest Helmet	582 05 50-01	Ratchet Kit Rear
Technical Forest Helmet	583 87 08-01	Forehead Pad
Technical Forest Helmet	5817543-01	Neck Protection Assy
Technical Forest Helmet	581 50 82-01	Sun Peak Visor

Designed to fit our FM radio hearing protectors and Functional forest helmets.

 Item
 Order PNC
 RRP ex VAT
 RRP inc VAT

 Functional
 505 66 53-26

 FM Radio
 505 66 53-91

BOOM MIC FOR X-COM



www.youtube.com/HusqvarnaUK







HEARING PROTECTORS WITH FM RADIO



Hearing protection with built-in FM Radio with improved sound quality and ergonomic headband. 3.5mm AUX input for audio and communication radio.

Item	Order PNC	SNR 🔊	RRP ex VAT	RRP inc VAT
Headband	578 27 49-03	27dB		
Helmet	578 27 49-04	27db		

GARDENER HEARING PROTECTION



Developed for garden work. Light and comfortable with extra wide headband. Also available with a perspex or mesh visor.

Item	Order PNC	SNR 🔊	RRP ex VAT	RRP inc VAT
Basic model (pack of 10)	505 69 90-12	25dB		
With perspex visor	505 66 53-60	25dB		

PROTECTIVE GOGGLES



Developed for people who wear glasses, featuring anti-fog coated lenses and a soft inside for greater comfort. Durable against impact, dust and airborne particles.

Item	Order PNC	RRP ex VAT	RRP inc VAT
Goggles	544 96 39-01		

PROTECTIVE GLASSES X



Scratch resistant glasses with frames that can be extended and angled. The yellow tinted lenses give improved vision in dark conditions and the grey tinted lenses, with UV protection, give improved vision in sunny conditions.

Item	Order PNC	RRP ex VAT	RRP inc VAT
Clear X	544 96 37-01		
Yellow X	544 96 37-02		
Sun X	544 96 37-03		

PNC is for 1 x pack of 10 Gardner Hearing Protection. Please note, price is for single item

HEARING PROTECTION WITH HEADBAND



Hearing protection where you can adjust the pressure by 20%. With soft, airy padding in the headband and an ergonomic design. The ear covers are the same as for our helmets. Available as a headband and helmet set. Common helmet set will fit Classic, Functional and Arborist helmets.

Item	Order PNC	SNR 🔊	RRP ex VAT	RRP inc VAT
Headband	505 66 53-04	27dB		
Common Helmet Set	505 66 53-25	26dB		
Technical Helmet Set	587 44 24-01	26dB		

HEARING PROTECTION WITH VISOR AND COVER



Comfortable hearing protectors where you can adjust the pressure by 20%. Ideal for clearing grass and trimming. Features a cover between the visor and headband protecting your head from grass and rain. Can be used in combination with protective glasses. Can also be fitted with a sun peak.

Item	Order PNC	SNR 🔊	RRP ex VAT	RRP inc VAT
With perspex visor	505 66 53-48	27dB		
With mesh visor	505 66 53-58	27dB		

PROTECTIVE GLASSES



Protective glasses with non-scratch lenses. Meets requirements of EN 166.

Item	Order PNC	RRP ex VAT	RRP inc VAT
Clear	544 96 38-01		
Sun	544 96 38-02		

310



OPTIMISE YOUR MACHINES DERFORMANCE




RIGOROUS TESTING At Husqvarna, we test oils in hot temperatures to see if the machine stays lubricated, and in the cold, to check it starts easily.



VERIFIED ENGINE FORMULA We also test for thousands of hours in real life field tests. Only the oils that fulfil our strict requirements get the VEF label.



PROVEN PERFORMANCE Compared to other oils, Husqvarna oils have been proven to leave less deposits on the pistons. Reducing damage at high temperatures.



THE RIGHT TEMPERATURE Oils are developed and continually tested to keep the right temperature and to ensure that your engine gets the optimum lubrication it needs.

BETTER FOR YOU, BETTER FOR YOUR HUSQVARNA

There is no better fuel for your Husqvarna product than our alkylate petrol manufactured to unique Husqvarna specifications. Our XP® Power 2 is conveniently pre-mixed with exactly 2% of Husqvarna XP® synthetic 2-stroke oil, providing efficient combustion leaving a cleaner, cooler, healthier engine with minimal harmful substances in the emissions.

It also prevents inner corrosion, makes starting easier, reduces the need for service and minimises downtime. VEF approved.

GIVE YOUR HUSQVARNA ENGINE THE BEST CONDITIONS TO DELIVER ITS FULL POTENTIAL.

- ✓ Prevents downtime
- Extends product lifetime
- ✓ Reduces need for service
- Easy start of the engine
- ✓ Long storage shelf life
- ✓ No more mixing (XP[®] Power 2)
- VEF Verified Engine Formula (XP[®] Power 2)
- Healthier working environment
- Increases productivity and safety due to a clear mind the full working day.
- Reduces carbon footprint

DID YOU KNOW?

Our XP® Power 2 has almost no aromatics, benzene or olefins and extremely low fluorine content meaning that it is less corrosive than other fuels and one of the cleanest alkylate fuels, giving your product optimal performance; improving power, torque and startability.





2

HUSQVARNA XP® POWER 2



Alkylate petrol developed specifically for Husqvarna two-stroke engines. Pre-mixed with 2% of premium Husqvarna XP® synthetic 2-stroke oil (50:1). Provides efficient combustion for a clean, healthy engine with a minimum of harmful substances in the emissions. Simplifies starting and increases productivity by allowing a healthier working environment. VEF approved. Recommended shelf life is 2 years*.

Item	Order PNC	RRP ex VAT	RRP inc VAT
1 Litre	589 22 76-01		
5 Litre	582 20 20-05		
25 Litre	583 95 29-02		
200 Litre	583 95 29-04		

HUSQVARNA POWER 4



Alkylate petrol developed to work with 4-stroke engines. Provides efficient combustion for a clean, healthy engine with a minimum of harmful substances in the emissions. Simplifies starting and increases productivity by allowing a healthier working environment. Recommended shelf life is 2 years*.

Item	Order PNC	RRP ex VAT	RRP inc VAT
1 Litre	589 22 79-01		
5 Litre	583 95 59-01		
25 Litre	583 95 59-02		
200 Litre	589 22 79-40		

ACTIVE CLEAN SPRAY 500ML



Versatile cleaning spray, effective on saw chains, garden machines, air filters, and dirty boots. Husqvarna Active Clean Spray contains a specially-developed detergent that is phosphate-free and biodegradable.

Order PNC	RRP ex VAT	RRP inc VAT
597 25 57-01		

HUSQVARNA POWER FILLER SPOUT



Filler spout specifically designed when working with Husqvarna XP $^{\odot}$ Power 2 and Power 4, 5 Litre bottles. For quick and easy pouring.

Order PNC	RRP ex VAT	RRP inc VAT
582 06 66-01		



Z



OILS & LUBRICANTS



ENGINEERED TO OPTIMISE YOUR HUSQVARNA

2-stroke chainsaw engines can run at 14,000 rpm, often under heavy load. At Husqvarna we design our engines to be durable and powerful, whilst also lightweight. This places special requirements on the oil – so it's vital to choose the right one. Husqvarna 2-stroke oils that meet our strict requirements are labelled VEF – Verified Engine Formula.

HP 2-STROKE ENGINE OIL



Formulated to work well with low-quality fuels and to meet all the tough challenges a 2-stroke engine oil can encounter. Carefully selected components in this part synthetic oil gives a cleaner engine and less coating on the piston/cylinder walls, exhaust port and crankcase. VEF approved.

Volume	Order PNC	RRP ex VAT	RRP inc VAT
0.1 Litre	587 80 85-01		
1 L Dosage	587 80 85-11		
4 Litre	587 80 85-20		
20 Litre	587 80 85-30		
208 Litre	587 80 85-40		

VAT Dealer Information Shipped in packs of 50 Shipped in packs of 12 Shipped in packs of 4

LS+ 2-STROKE ENGINE OIL



1

LS+ oil is a mix of mineral and synthetic oils. Low smoke and has extremely good lubrication qualities on high load engine components, such as the connecting rod and bearings. It is best used for chainsaws and clearing saws with a cylinder volume up to 55cm³. It also lowers the engine temperature which extends engine life and gives a very good seizure protection against lean mix as well as carbon related piston seizures. VEF approved.

Volume	Order PNC	RRP ex VAT	RRP inc VAT
0.1 Litre	578 18 03-02		
L dosage	578 03 70-02		
4 Litre	578 03 71-02		
10 Litre	578 18 00-02		
208 Litre	578 18 04-02		

Dealer Information Shipped in packs of 50 Shipped in packs of 12 Shipped in packs of 3

-

XP® 2-STROKE ENGINE OIL



An excellent, fully synthetic and biodegradable 2-stroke oil, developed for tough use with high loads and engine speed. Developed with a completely new ash-free wear additive which gives extremely good lubrication, low smoke, a cleaner engine and less coating on the piston and in the crankcase compared to competing oils. Appropriate for all Husqvarna products, especially for engines with a cylinder volume over 55cm³. VEF approved.

Volume	Order PNC	RRP ex VAT	RRP inc VAT	Dealer Information
0.1 Litre	578 18 03-03			Shipped in packs of 50
1L dosage	578 03 70-03			Shipped in packs of 12
4 Litre	578 03 71-03			Shipped in packs of 3
10 Litre	578 18 00-03			-
208 Litre	578 18 04-03			-



temperatures.



4-STROKE OIL 10W-40



High quality engine oil for all 4-stroke garden equipment. Developed for easy starting at low temperatures, perfect lubrication at all operating conditions and low oil consumption.

VolumeOrde1.4 Litre577 4°

Order PNC RRP ex VAT RRP inc VAT 577 41 97-02

AT Dealer Information Shipped in packs of 12
 Volume
 Order PNC

 4 Litre
 597 68 70-04

RRP ex VAT RRP inc VAT

4-STROKE 10W-30 TRANSMISSION OIL

Dealer Information Shipped in packs of 3

Fully synthetic transmission oil that is

specially developed for transmissions

The fully synthetic transmission oil is

extremely stable in both hot and cold

in Husqvarna ride-on machines.

4-STROKE SAE 30 ENGINE OIL



High-quality oil for 4-stroke lawn mowers. Gives the engine excellent protection.

AIR FILTER OIL



Biodegradable. Effectively traps particles in the filter, keeping the engine cleaner and reducing wear.

Volume	Order PNC	RRP ex VAT	RRP inc VAT	Dealer Information
0.6 Litre	577 41 92-01			Shipped in packs of 12
1.4 Litre	577 41 97-01			Shipped in packs of 12

Volume	Order PNC	RRP ex VAT	RRP inc VAT	Dealer Information
1 Litre	531 00 92-48			Shipped in packs of 12

MINERAL CHAIN OIL



Mineral Chain oil with adhesive agent for high-performance chain saws. Guaranteed low wear of chains and rails. For universal use all year round.

X-GU/			
N-UU	ום עאר	υ υπά	



Improved formula Husqvarna chain oil with superior lubrication performance even in extreme conditions. Excellent anti-oxidation properties protect the bar and chain during storage.

 Volume
 Order PNC
 RRP ex VAT
 RRP inc VAT
 Dealer Information

 1 Litre
 579 39 60-01
 Shipped in packs of 12

 5 Litre
 579 39 61-01
 Shipped in packs of 4

 20 Litre
 579 39 62-01

 200 Litre
 579 39 63-01

Volume	Order PNC	RRP ex VAT
1 Litre	596 45 73-01	
5 Litre	596 45 73-02	
10 Litre	596 45 73-03	
20 Litre	596 45 73-04	
200 Litre	596 45 73-05	

RRP inc VAT Dealer Information Shipped in packs of 12

Shipped in packs of 4 Shipped in single Shipped in Single Shipped in Single



FUEL. OILS & LUBRICANTS

MULTI PURPOSE / ECO GREASE / GREASE GUN



Item

Multi Purpose grease with good corrosion protection and load carrying capacity. Suitable for general greasing purposes.

For brushcutter bevel gears. Eco grease lubricates the transmission and absorbs the axial forces. Environmentally compatible and biodegradable.

RRP ex VAT RRP inc VAT Order PNC

225g Multi Purpose Grease 100g Eco Grease 0.6L Grease Gun

502 51 27-01 503 97 64-01 595 01 17-01

COMBI CAN



Item Combi Can 5 + 2.5 Litre Fuel Spout Oil Spout Winter Oil Spout

Enables you to refuel quickly without splash effects and any waste. The two containers are designed to achieve an optimised fuel and chain oil ratio. Integrated tool box for frequently needed spare parts and filing equipment. Approved in accordance with UN recommendations. Read more on page 94.

Order PNC RRP ex VAT RRP inc VAT 580 75 42-01 586 11 04-01 586 11 05-01

586 11 07-01

FUEL CAN

Order PNC 537 63 91-01

NEW

Durable and easy to use fuel can.

- · Flexi fuel spout included
- Integrated handle
- Approved to UN Standard
- 5 litre

RRP ex VAT RRP inc VAT

EFFICIENT FUEL UP SOLUTIONS MAKE EVERY WORKDAY BETTER

Visit: www.husgvarna.com/uk/oils-fuels-and-lubricants/

FUEL, OILS & LUBRICANTS



NEW

HEDGE TRIMMER SPRAY

Bhasquarna HEDGE TRIMMER SPRAY

NEW

Effectively cleans and lubricates the hedge trimmer blades.

- Easy to apply 400ml spray can.
- Keeping your hedge trimmer blade sharp, clean and lubricated means better performance with longer battery life or lower fuel consumption.
- Reduces wear and increases the product life by protecting the blade from corrosion during storage.
- Compatible with the flexi belt system.

RRP ex VAT RRP inc VAT

NEW



Order PNC

538 62 94-01

loosening rusted nuts and bolts, or proactive corrosion protection.Use it with spray nozzle or tube

Multi purpose spray for cleaning,

lubricating and protecting your tools.

• Easy to apply 400ml spray can

• This multi-function spray is your

best friend in the workshop, ideal for cleaning dirty tools and parts,

with dual nozzle.

- nozzle depending on task.
- Compatible with the flexi belt system.

RRP ex VAT RRP inc VAT

Order PNC 538 62 92-01

AIR FILTER OIL



For efficient maintenance of air filters in petrol brushcutters and forestry clearing saws.

- Easy to use 200ml can.
- The air filter oil helps keep the engine clean and reduce wear by efficiently binding dust and sand particles in the air filter.
- Ensures optimal air flow for best engine performance and low fuel consumption.
- Easy to apply directly on the air filter, allowing a cleaner working process.
- Compatible with the flexi belt system.

RRP ex VAT RRP inc VAT

538 62 95-01





Ż



CHANGE CLOTHES. NOT WHO YOU ARE.

Show who you are, even if you're not doing any tough work. The Husqvarna Xplorer series is designed with that in mind. These leisure wear clothes and accessories will help you feel comfortable and express your workday confidence in your free time.



QUALITY CLOTHES FOR QUALITY TIME

Stay comfortable off the job – and be ready for whatever that precious time off can offer. With the Husqvarna Xplorer leisure collection, you'll be prepared for the very best outdoor experience, never compromising on comfort, fit - or style. The clothes and equipment are all made from high-quality materials and adapted to a fulfilling life in the great outdoors.

OUTDOOR TROUSERS



NEW

Size 44 for X Small 46 for Small 50 for Medium 54 for Large 58 for X Large 62 for XX Large

Comfortable and durable trousers for outdoor activity with 4-way stretch fabric on knees and rear. Reinforced fabric in exposed areas and pre-bent knees add comfort and mobility. Adjustable waist and legs. Mobile phone is protected by a padded pocket.

RRP ex VAT RRP inc VAT Order PNC

A breathable and water resistant

10 000mm water columns, with

flexible 4-way stretch material,

gives you the best possible

comfort. Equipped with taped

ventilation under sleeves for

RRP ex VAT

seams and smart features such

as padded mobile pocket, hidden

adjustable airflow, and hook and

loop flap closure on the sleeves.

shell jacket waterproofing

NEW

54 for Large

58 for X Large

62 for XX Large

RRP inc VAT

Mens, Charcoal & Anthracite Grey, S-XXL 536 15 75-XX Womens, Charcoal & Anthracite Grev, XS-L 536 16 01-XX

Item

SHELL JACKET



Item Womens, Charcoal, XS-XL Mens, Charcoal, S-XXL

HOODIE



Size

Order PNC

536 15 57-XX

536 15 56-XX

Size

42 for X Small

50 for Medium

46 for Small

42 for X Small 54 for Large 46 for Small 58 for X Large 50 for Medium 62 for XX Large

This air blue unisex hoodie is designed to deliver style that endures. The large, soft hood and high neck design bring extra warmth and comfort. Features a chest pocket for your mobile phone.

FLEECE JACKET



Item Womens, steel grey, XS-L Mens, granite grey, S-XXL

Order PNC 593 25 22-XX 593 25 23-XX

T-SHIRT



Size 42 for X Small 46 for Small 50 for Medium 54 for Large 58 for X Large 62 for XX Large

The fleece jacket is a cosy companion in all seasons. On cold, early spring or autumn days it becomes a nice middle layer, or a comfortable outer jacket. The jacket comes in both men's and women's sizes so you can find your optimal fit.

RRP ex VAT RRP inc VAT

Size 42 for X Small 54 for Large 46 for Small 58 for X Large 50 for Medium 62 for XX Large

Made from a blend of organic cotton, and polyester obtained from recycled plastic waste, the t-shirt is fast-drying and wear-resistant. It'll keep you cool and hold its colour and shape, even after repeated washes for a long lifespan. It comes in forest night green and features a tree ring design.

Item T-Shirt, XS-XXI

Order PNC 529 90 75-XX

RRP ex VAT **RRP** inc VAT

Size

T-SHIRT LONG SLEEVE



42 for X Small 46 for Small 50 for Medium

54 for Large 58 for X Large 62 for XX Large

Made from a blend of organic cotton, and polyester obtained from recycled plastic waste, this long-sleeved t-shirt is fast-drying and wear-resistant. It'll keep you cool and hold its colour and shape, even after repeated washes for a long lifespan. It comes in ebony grey and features a bark camo design..

Item Hoodie Unisex air blue

Order PNC RRP ex VAT 531 42 80-XX

RRP inc VAT

Item T-Shirt, XS-XXL,

Order PNC 529 90 91-XX RRP ex VAT RRP inc VAT



XPLORER LEISUREWEAR

NECK TUBE



The neck tube is specifically developed for that extra warmth and to stop wind from cooling you down during easier tasks in the forest, or for windy and colder days. Available in orange with our bark camo print with the Husqvarna logo.

Item	Order PNC	RRP ex VAT	RRP inc VAT
Neck tube	593 25 76-01		

BEANIE PIONEER SAW



The beanie comes in black with a blow out print of our pioneer saw in the front. It is made from breathable Coolmax air material.

Item	Order PNC	RRP ex VAT	RRP inc VAT
Beanie pioneer saw	593 25 37-01		

DUFFEL BAG, 70L



A durable 70L duffel bag made of tough materials and smart features for all purposes. The outer material – tarpaulin – keeps your contents dry and is easy to clean. The inside pocket in mesh makes organising easier, and for extra convenience shoulder straps and two organising bags are included.

Item	Order PNC	RRP ex VAT	RRP inc VAT
Duffel bag, 70L	593 25 83-01		

BACKPACK, 30L



A comfortable, high-quality backpack for all weathers made from durable TPU/ribstop material that keeps the inside dry and also makes the backpack easy to clean. Large compartments for items such as your laptop, water bottle and thermos, and a roll-up seal that can be closed in two ways to keep water out.

Item	Order PNC	RRP ex VAT	RRP inc VAT
Backpack, 30L	593 25 82-01		

CAP



This collection offers three cap styles: a vintage orange cap with adjustable hook-and-loop with a print of our pioneer saw, a granite grey canvas cap with adjustable leather band, and a vintage cap in bark camo pattern with a bleeding orange visor and adjustable leather band.

Item	Order PNC	RRP ex VAT	RRP inc VAT
Pioneer saw, orange	593 25 39-01		
Granite leather patch, granite grey	593 25 40-01		
Bark camo, forest green	594 72 97-01		

TROLLEY BAG, 90L



Trolley bag, holding 90L, perfect for transporting all your necessities. U-shaped zipper on top makes packing and structure easier, while the moulded side and bottom make the bag stand upright without support. For extra convenience, organising bags are included, as well as an ID pocket for easy recognition.

Item	Order PNC	RRP ex VAT	RRP inc VAT
Trolley bag, 90L	593 25 81-01		

320





WATER BOTTLE INSULATED 0,5L



Make sure you stay properly hydrated - but avoid using unnecessary disposable plastics. This stainless steel bottle features a reinforced, tight-fitting cap with a strap to easily attach the bottle to a carabiner or your backpack.

Item Water Bottle Insulated 0,5L Order PNC RRP ex VAT

597 41 81-01

THERMOS BOTTLE INSULATED 0,75L



Take your favourite beverage to your favourite outdoor spot in this insulated, crush-proof stainless steel thermos.

RRP inc VAT

Item

Order PNC 597 41 79-01

Thermos Bottle Insulated 0,75L

KIDS FLEECE JACKET



Item

1-2 years

3-4 years

5-6 years

7-8 years 9-10 years This is a soft and comfortable hoodie with a warm, soft fleece material inside. A high-quality garment made to be inherited. Made of certified recycled polyester that comes from re-used PET bottles. Windstopping zipper and two zipped outer pockets. Suitable for kids from 1 up to 10

RRP ex VAT RRP inc VAT

NEW

Order PNC RRP ex VAT RRP inc VAT 536 11 16-02 536 11 16-04 536 11 16-06 536 11 16-08 536 11 16-10

INSULATED FOOD CAN WITH SPOON 0,6L



Fill up quickly with energy and serve lunch from this handy food can. Equipped with a foldable spoon in the lid. The lid stays tightly shut without leaking and the wide opening makes it easy to eat from, fill up and clean the thermos after use.

Order PNC RRP ex VAT RRP inc VAT Item Insulated Food Can With Spoon 0,6L 597 41 78-01

		-	-
-	5		
	R (1
		-	16

KIDS RUBBER BOOTS

A flexible and soft, yet durable boot with reinforcements around the sole and back. 100% natural rubber to keep the feet warm and dry. A drawstring at the top keeps snow and dirt out. Reflective tapes add visibility in the dark. Removable inner sole. Suitable for kids from 2 up to 8 years.

NEW

NEW

Item	Order PNC	RRP ex VAT	RRP inc VAT
Size 21/22 (18-24 months)	536 13 04-02		
Size 24/25 (2-3 years)	536 13 04-03		
Size 27/28 (4-5 years)	536 13 04-05		
Size 30/31 (5-6 years)	536 13 04-06		
Size 33/34 (7-8 years)	536 13 04-08		



NEW

With sustainability in mind, the backpack is made from certified recycled polyester made from re-used PET bottles. Padded shoulder pads and back as well as a detachable seat pad make the backpack comfortable to use. Smart details as tablet compartment and easy-to-reach bottle pockets make the backpack versatile. Equipped with reflective strips to ensure good visibility in the dark.

Item Kids Backpack, one size

Order PNC RRP ex VAT RRP inc VAT 536 12 83-01

Item Kids Beanie, one size

KIDS BEANIE

Order PNC RRP ex VAT RRP inc VAT 536 15 99-01

Colourful and soft beanie made

with sustainability in mind. Made

from certified organic cotton.

(f) www.facebook.com/HusqvarnaUK



HUSQVARNA MERCHANDISE

HUSQVARNA CLOTHING



Essential for any Husqvarna fan! There is something for any occasion in our extensive Husqvarna clothing collection, whether it be a cap, hoodie or a coat, why not express yourself by wearing something from our merchandise collection.



husqvarna.com/merchandising

BASEBALL CAP



Navy cotton twill cap with white embroidered Husqvarna logo on the front. Adjustable size. One size fits all.

COTTON POLO SHIRT



Order PNC 582 39 69-01 RRP ex VAT RRP inc VAT

Mens: 101 63 80-XX Womens: 101 63 79-XX

BUSINESS SHIRT



- Mens 01 Small
- 02 Medium 03 Large
- 04 X Large
- 05 XX Large
- 06 XXX Large

Regular fit white shirt. 100% cotton with Navy Husqvarna logo on cuff.

BODYWARMER



Mens 01 Small 02 Medium

- 03 Large
- 04 X Large
- 05 XX Large
- 06 XXX Large

Navy softshell bodywarmer with white embroidered Husqvarna logo and zipped chest pocket. Water/wind resistant.

Order PNC 582 05 06-XX RRP ex VAT RRP inc VAT

Order PNC 582 36 57-XX

RRP ex VAT RRP inc VAT

Visit: www.husqvarna.com/uk

01

02

03

04

05



HOODIE



582 39 93-XX

Mens

- 01 Small
- 02 Medium
- 03 Large
- 04 X Large 05 XX Large
- 06 XXX Large

High quality sweat hoodie with Husqvarna logo on chest with chest pocket. 92% cotton/ 8% Lycra.

RRP ex VAT **RRP** inc VAT

POWERFLEECE



Order PNC Mens: 582 40 21-XX Womens: 582 40 20-XX

	-	
Small	01	X Small
Medium	02	Small
Large	03	Medium
X Large	04	Large
XX Large	05	X Large
v zin un liaht	weid	nht iacket

Womens

Mens

Navy zip up lightweight jacket with orange stitching on sleeves and white Husqvarna logo on chest. Available for men and women.

RRP ex VAT RRP inc VAT

T-SHIRT



582 32 48-XX

01 Small 02 Medium 03 Large 04 X Large 05 XX Large

RRP ex VAT

Unisex

100% cotton, high quality unisex t-shirt.

FUNCTIONAL JACKET



Order PNC

01	Small	01	X Small
02	Medium	02	Small
03	Large	03	Medium
04	X Large	04	Large
05	XX Large	05	X Large
06	XXX Large		
0	itweight hoo qvarna logo		,

Womens

RRP inc VAT

th pocket on sleeve. Water/ windproof, breathable fabric.

RRP ex VAT

Mens: 582 40 73-XX Womens: 582 40 72-XX

SPORT JACKET



Order PNC Mens: 582 22 88-XX Womens: 582 22 86-XX

Mens Womens **01** Small 01 X Small 02 Small 02 Medium 03 Medium 03 Large 04 X Large 04 Large 05 XX Large 05 X Large 06 XXX Large

RRP inc VAT

Light quilted jacket with soft polyester shell. Features white embroidered Husqvarna logo and chest pocket.

RRP ex VAT RRP inc VAT

WINTER JACKET



	Mens	١	Nomens
01	Small	01	X Small
02	Medium	02	Small
03	Large	03	Medium
04	X Large	04	Large
05	XX Large	05	X Large
06	XXX Large		
Ligh	nt quilted jac	ket v	vith padd

led fillings. Features chest pocket and white printed Husqvarna logo.

Order PNC Mens: 582 22 73-XX Womens: 582 22 91-XX RRP ex VAT RRP inc VAT

🕞 Instagram: HusqvarnaUK



HUSQVARNA ACCESSORIES



Husqvarna accessories offer something for any Husqvarna fan from bags to keyrings and even tumblers. Any item from this page makes a great gift or stocking filler.

CHAINSAW KEYRING



Chainsaw keyring with bottle opener makes this the perfect companion.

CHAINSAW KEYCOVER



Rubber key cover with keyring, featuring push activated LED light.

Order	PNC	Order PNC	
590 96	6 00-01	590 76 84-01	
RRP ex VAT	RRP inc VAT	RRP ex VAT	RRP inc VAT

Dealer information: PNC is for 1 x pack of 10. Please note, price is for single item

CHRONO WATCH



High quality chronograph watch with Citizen movement. Comes with 5 years warranty, leather strap with stitching detail and giftbox.

Order PNC 582 40 64-01 RRP ex VAT RRP inc VAT

SPORTS WATCH



With silicon rubber strap with Seiko movement. Comes with 3 years warranty.

Orde	er PNC
582 4	0 37-01
RRP ex VAT	RRP inc VAT

 \sim

Visit: www.husqvarna.com/uk



GRANITY TUMBLER



Clear glass tumbler with Husqvarna logo - 31cl.

TRAVEL FLASK



The perfect travel companion. Available in 0.35 Litre.

Orde	er PNC	Orde	r PNC
590 2	106-01	582 40	0 62-01
RRP ex VAT	RRP inc VAT	RRP ex VAT	RRP inc VAT

Dealer information: PNC is for 1 x pack of 12. Please note, price is for single item



GOLF UMBRELLA



Stormproof golf umbrella with Husqvarna logo and 'Ready When You Are' text. 30" diameter and EVA handle for good grip.

Order	PNC	Order	r PNC
580 71	44-01	101 69	20-20
RRP ex VAT	RRP inc VAT	RRP ex VAT	RRP inc VAT



Dealer information: Shipped in packs of 10

www.youtube.com/HusqvarnaUK



HUSQVARNA TOYS



There's always lots to do and fix in the garden. So let's get started with your children's very own selection of Husqvarna toys!

With plenty to choose from, our range of children's toy machines is brilliant for inspiring the imagination whether they prefer trimming the hedges, mowing the lawn or even trimming its edges.

Any of the Husqvarna toys will help your little one discover the world of the outdoors through pretend play, including our ever popular toy chainsaw – now let's get to work!

TOY LAWN MOWER

Battery operated toy lawn mower with active starter, realistic sounds and flashing lights. Batteries included. Age 3+ years.



582 40 63-01

TOY AUTOMOWER®



Battery powered toy Husqvarna Automower®. Remote controlled allowing the toy to be driven and steered, with flashing lights upon start up.

Designed for indoor use, age 3+ years

Order PNC	RRP ex VAT	RRP inc VAT
597 80 96-01		

SHARE your stories and photos on your Facebook, Instagram and Twitter by tagging us.

HusqvarnaUK
 UK_Husqvarna
 HusqvarnaUK

 \sim



TOY CHAINSAW KIT



Kit includes battery operated toy chain with chainsaw sound and rotating chain (batteries included), plastic helmet and gloves. Age 3+ years.

Order PNC	RRP ex VAT	RRP inc VAT
586 49 82-01		

TOY CHAINSAW



Battery operated toy chainsaw with chainsaw sound and rotating chain. Batteries included.

Age 3+ years.

Order PNC	RRP ex VAT	RRP inc VAT
522 77 11-01		

TOY LEAF BLOWER



Battery operated toy leaf blower with blowing air and realistic sounds. Batteries included.

Age 3+ years.

Order PNC	RRP ex VAT	RRP inc VAT
586 49 80-01		

TOY GRASS TRIMMER



Battery operated toy grass trimmer with light up and moving trimmer line and realistic sounds. Batteries included. Age 3+ years.

·		
Order PNC	RRP ex VAT	RRP inc VAT
586 49 81-01		

550XP TOY CHAINSAW



Battery operated 550XP toy chainsaw with chainsaw sound and rotating chain. Batteries included Age 3+ years.

Order PNC	RRP ex VAT	RRP inc VAT
599 60 87-01		

TOY PROTECTIVE KIT

NEW



Battery operated 550XP toy chainsaw with chainsaw sound and rotating chain and additional child size play protective equipment. Batteries included. Age 3+ years.

Order PNC	RRP ex VAT	RRP inc VAT
531 42 39-01		

TOY HEDGE TRIMMER



Battery operated toy hedge trimmer with moving blades and realistic sound. Batteries included.

Age 3+ years.

Order PNC	RRP ex VAT	RRP inc VAT
586 49 79-01		

TOY 345BT BACKPACK BUBBLE BLOWER NEW



Looks like a real Husqvarna 345BT Backpack Blower! Good for kids ages 3 and up. Blows a constant stream of bubbles on trigger activation. Age 3+ years.

Order PNC	RRP ex VAT	RRP inc VAT
531 41 62-01		
Bubble Solution 2-Pack: 531 42 40-01		

GLOSSARY OF TERMS

HUSQVARNA WORD BY WORD

A

ACTIVE AIR FILTRATION™ One of the most efficient air filtration systems on the market. Longer service intervals and less engine wear – even in tough conditions.

ADJUSTABLE DEPTH BAR For easy adjustment of the cultivating depth.

ADJUSTABLE HANDLEBAR Wing nut operation adjusts handlebars both horizontally and vertically for optimum working position.

ADJUSTABLE OIL PUMP An adjustable oil pump provides the bar and chain the right amount of lubrication for every task.

ADJUSTABLE REAR HANDLE The rear handle is adjustable to facilitate cutting the sides and top of hedges.

ADJUSTABLE SLIDING SEAT Adjustable while seated; seat moves forward and down, or backwards and up.

ADVANCED FLOW TECHNOLOGY (AFTECH[™]) AFTech[™] is a unique design where the cutting deck, blade and chute produce optimum airflow. This means first class results in all cutting modes and helps to fill the collector to the optimum level, for less frequent emptying.

AGGRESSIVE WHEEL TREAD For improved wheel-to-ground traction without leaving any unnecessary tracks on the lawn.

ALL-WHEEL-DRIVE (AWD) Ensures traction on uneven, wet and slippery areas and slopes. AWD automatically adjusts the traction on all wheels depending on situation and ground condition.

ANTI-SCALP WHEELS AND FRONT ROLLER Most cutting decks are equipped with anti-scalp wheels and sometimes also a front roller. These reduce the risk of scalping when cutting uneven lawns.

AIR INDUCTION[™] A powerful air stream lifts the grass before it is cut, for excellent cutting and collection of both grass and leaves.

AIR INJECTION™ Centrifugal air cleaning system for reduced wear and longer operating time between filter cleanings.

AIR PURGE Air Purge and a decompression valve make the machine extra easy to start.

ARTICULATED STEERING The unique articulated steering system allows the rear pair of wheels to swing in underneath the machine. The result is superior manoeuvrability with a minimum turning radius at full lock.

ATTACHMENT FRAME Easy to shift between cutting decks and front-mounted attachments, such as broom, flail mower, snow blade and snow thrower. No tools or belt changes needed.

AUTOMATIC BLADE ENGAGEMENT The blades are engaged automatically, when the cutting deck is lowered.

AUTOMATIC PASSAGE HANDLING The robotic mower automatically senses narrow passages and will vary its route through the passage to avoid unpleasant tracks.

AUTO RETURN STOP SWITCH Stop switch automatically resets to the ON position for trouble-free starting.

AUTOTUNE™ Provides maximum power through automatic engine setting. No time spent on manual carburettor adjustment. Autotune™ compensates for different fuels, altitude, humidity and ambient temperature.

B

BALANCE HARNESS An ergonomic harness that distributes the load optimally between shoulders, chest and back. Wide padded straps and wide back plate reduce the load. Hip pad with travelling connection reduces body movement.

BALANCE X[™] HARNESS A unique ergonomic harness that effectively spreads the machine's weight and maximises its excellent balance. The machine feels much lighter, and much easier and less strenuous to move around. Ergonomic harness with broad back support that distributes the load over a larger area. The hip belt has a shock-absorbing hip pad.

BALANCE XT[™] HARNESS A harness providing excellent ergonomics. The load is spread on both shoulders, over the chest and the back and on the hips. This makes the machine feel much lighter, and less strenuous to move around. A wide adjustable back plate, which is ventilated and shaped to fit the curve of the back, allows the harness to fit different body sizes. Wide, padded hip belt. The shock-absorbing hip pad has a travelling connection which reduces body movement.

BALL-BEARING FRONT WHEELS Heavy duty ball-bearings provide long lasting and trouble free service on professional models.

BAR CUTTING LENGTH The cutting length is different from its overall length. It's the distance from the front of the saw to the tip of the farthest cutter rounded to the nearest inch / cm's.

BATTERY INDICATOR LAMP Indicates when the battery is running low and it is time to get ready to charge it.

BATTERY INDICATOR WITH CHARGER CONNECTION The indicator gives clear indication on battery status, which makes it easy to see when charging is needed. The charger connection is placed next to the indicator, for extra convenient recharging of the battery. Fits Husqvarna battery charger XS 800 (new connection) and BC 0.8.

BIOCLIP® (MULCHING) The grass is cut into small pieces that quickly decompose and return to the lawn as fertiliser, also making the lawn more drought resistant. BioClip® is suitable for frequently cut areas.

BIOCLIP® FROM SEAT Easy switch between collecting and BioClip® (mulching) mode by means of a dashboard-operated central actuation device. You don't have to leave the driver's seat.

BIOCLIP® KIT / COVER Makes it possible to convert your side ejection tractor to BioClip®, which means that the grass is cut into small pieces that quickly decompose and return to the lawn as fertiliser, also making the lawn more drought resistant.

BIOCLIP® PLUG Convert your tractor from integrated collection to BioClip®. The plug is available for all TC tractors.

BLUETOOTH A standard for the short-range wireless interconnection of mobile phones, computers, and other electronic devices.

BUMPER Protects the front of the tractor effectively.

C

CARRYING HANDLE / S Facilitates lifting and transport.

CARGO HOLDER The practical carrier and compartment on the engine hood can be used for extra equipment.

CAST FRONT AXLE Heavy cast front axle provides superior balance and stability, even with a collector.

CENTRAL CUTTING HEIGHT ADJUSTMENT Quick and easy adjustment of grass cutting height with one lever.

CHEVRON TYRES Large wheels with heavy treads for optimised grip.

CHOKELESS START Easy to get operating with automatic choke. Just turn the key and go.

COLLECT BLADE Top class collection performance with minimum clippings left on the lawn, giving the lawn a tidy and nice look.

COLLECTION When collecting the grass you get a tidy cutting result. The risk of spreading weeds is less and the collected grass is easily emptied into a compost bin. You can also collect leaves and small twigs.

COLLECTORS Our large and effective tractor collectors are perfect for collecting leaves as well as grass. The integrated collectors are easily emptied from the driver's seat (TC models). The easy-to-handle collector on our lawn mowers is solid, compact and in a high position on the mower, making it easy to remove and replace. Ergonomically designed with wide opening and a support handle.

COMBI CUTTING DECK The Combi cutting deck offers the versatility of two different cutting systems. Choose between BioClip® for lawn fertilisation and rear ejection for efficient mowing on areas with higher and rougher grass.

COMBI-GUARD The same cutting equipment guard can be used when using trimmer head and grass blade.

COMBINED CHOKE / STOP CONTROL Combined choke / stop control allows for easier starting and reduces the risk of engine flooding.

COMPOSITE CHASSIS Durable and light chassis, designed for best collection performance.

COUNTER-ROTATING TINES Tines rotate anti-clockwise, so the soil is broken up very well. Capable of deep-digging heavy soil.

COUNTERWEIGHT Increases weight on the wheels and improves balance.

CRUISE CONTROL A convenient, efficient function that ensures the tractor keeps an even speed, even if the lawn is undulating or sloping.

CUP HOLDER Convenient cup holder for refreshments during operation.

CUTTING DECK TRANSPORT MODE The cutting deck can be folded back along the tube into a transport mode for easy transport and storage.

CUTTING HEIGHT INDICATOR A well-placed indicator window makes it easy to control the cutting height settings.

D

DEFLECTOR TS tractors have side ejection deflectors as standard. Tractors with integrated collection (TC) can be converted to rear ejection with the deflector accessory (not TC 130)

DETACHABLE SHAFT Detachable shaft for easy transport and storage.

DETACHABLE TRANSMISSION Detachable transmission housing with lubrication nipple.

DOUBLE TRANSPORT WHEELS You can transport the cultivator by tilting it backwards onto the transport wheels.

DOUBLE BALL-BEARING WHEELS Ensure the mower rolls easily and without the wheels becoming loose, even after many years of use.

DOWN-DRAFTED VENTS The collector's down-drafted vents direct noise and dust downwards, away from the user, creating a more comfortable working environment.

DRAG BAR Easy-adjust drag bar, for different working conditions.

DRIVEN WHEELS Powered wheels for easy and comfortable operation.

DUAL DRAGLINKS Give tighter turning radius and improved manoeuvrability.

DUAL-ROTATING TINES The tines rotate either forward or reverse. Use forwardrotating mode for top soil cultivation and counter-rotating mode for deep soil tilling.

DUST BLOCKER COLLECTOR BAG Designed to keep dust into the bag, preventing it from blowing in the operator's face.

Ε

EASY ADJUSTABLE HANDLE BAR Quick and easy adjustment of the handle in two different heights.

EASY ADJUSTABLE CUTTING HEIGHT A well balanced one hand grip on our lawn mowers makes adjustment of cutting height easy and convenient.

EASY-ADJUST BLADE GUARD The blade guard is adapted quickly and easily during operation.

ELECTRONICS Push button start, indicator lamps for parking brake, battery, headlights, ROS and blade engagement.

ELECTRIC ENGAGEMENT OF CUTTING BLADE / S Easy engagement of cutting blade /s; simply pull the switch on the control panel.

ENGINE BEHIND DRIVER Thanks to the rear-mounted engine, you get better overview of the mowing and less noise and emissions in the driver's area.

ERGONOMIC HANDLES Angled handlebar provide excellent grip to reduce unnecessary strain giving optimum comfort and ergonomic operating control.

ERGONOMIC STEERING WHEEL Ergonomic and comfortable steering wheel.

EXTRA HARDENED REEL BLADE AND BEDKNIFE For excellent cutting performance and maximum durability.

F

FAST TRANSMISSION For extra efficient mowing and fast transport speed.

FENDER-MOUNTED CUTTING HEIGHT ADJUSTMENT Easy accessible cutting height adjustment for improved ergonomics. The spring-assisted cutting deck makes adjustment easier.

FOLDABLE HANDLES Meets the need for easy storage and transporting.

FOUR EQUALLY-SIZED WHEELS Large wheels both front and back provide optimal riding comfort, great accessibility and less risk of damaging delicate surfaces.

FRONT-MOUNTED CUTTING DECK Front-mounted cutting deck for excellent accessibility into corners and under bushes, park benches etc.

FUEL PUMP Fuel pump designed for easy starting by reducing the number of pulls in the starter cord.

 $\ensuremath{\textbf{FULL}}$ COLLECTOR INDICATOR A signal indicates when it is time to empty the collector.

G

GPS COMMUNICATION UNIT GPS theft tracker. SMS alert. Settings changes can be handled from a distance as well as submitting current operating status.

GPS-ASSISTED NAVIGATION An onboard GPS system creates a map of the garden, including where the boundary and guide wires are installed.

Η

HANDLEBAR-MOUNTED GEAR SELECTION Ergonomic handle with easy-access controls.

HANDLE HEIGHT ADJUSTMENT Adjustable handle height for improved ergonomics.

HEADLIGHTS Makes the products more visible and allows you to work when it's dark.

HEATED CARBURETTOR A heated carburettor lets the engine start easier and run smoother in cold working environments.

HEATED HANDLES Efficient heating coils in the front and rear handles make operating in cold and damp conditions more manageable.

GLOSSARY OF TERMS

HIDDEN CABLES The cables are hidden inside the handle tubes, which eliminates the risk of them becoming tangled in hedges or damaged when the handle is folded.

HIGH-CAPACITY BATTERY The high-capacity battery provides performance levels comparable to a petrol driven machine.

HIGH OFFSET POST High offset post increases freedom of movement when working in slopes.

HOUR METER Helps you having control over service and maintenance intervals.

HYDRAULIC EQUIPMENT LIFT Controls front-mounted equipment quick and with high precision. Managed by a easy reachable joy-stick placed on the control panel beside the operators seat.

HYDROSTATIC TRANSMISSION Optimises speed and provides excellent driving comfort. Speed and direction are controlled by separate pedals for forward and reverse.

HYDROSTATIC TRANSMISSION, FAST Hi-speed transmission for superior transport speeds and smooth, variable forward and reverse speeds with the aid of pedals.

INTEGRATED LOOP FOR ROPE A sturdy point for fastening a rope, making it easy to hoist the chainsaw up into a tree.

INERTIA-ACTIVATED CHAIN BRAKE If a kickback occurs and the tip of the bar is forced upwards, the inertia of the front guard should activate the chain brake instantly.

INTUITIVE KEY PAD Our battery products is very easy to operate, all information you need in one place.

-

LED HEADLIGHTS Gives over 50% larger lit area compared to traditional incandescent lights.

LOW NOISE ENGINE Quiet operation provides a comfortable work situation and low disturbance for others.

 $\ensuremath{\text{LOW VIB}}^{\otimes}$ Effective anti-vibration dampeners absorb vibration, sparing the user's arms and hands.

Μ

MY AUTOMOWER[®] An iPhone application that makes it possible for you to control the robotic lawn mower with your mobile phone.

Ν

NON-FRICTION SILENT MOWER The lack of friction between the reel blade and bedknife minimises resistance and noise, making the mower very easy to push.

0

OIL COOLER A heat exchanger for cooling the hydraulic system. The cooling system is adequate to keep oil temperatures within safe limits.

OPTIONAL CUTTING DECK To ensure a perfect result, most of our Riders have different cutting decks as options.

ONE-PIECE CUTTING DECK The cutting deck comes in one piece straight out of the stamping line which means it has no welded parts. This gives very high torsional rigidity, tolerance and durability as well as sturdiness in operation.

Ρ

PEDAL-OPERATED CVT TRANSMISSION Speed and direction are managed by pedals, which lets you keep both hands on the steering wheel, for optimum driving control.

PEDAL-OPERATED HYDROSTATIC TRANSMISSION Easy speed and direction control with pedal-operated hydrostatic transmission. Separate pedals for forward and reverse.

PIVOTING FRONT AXLE Ensures good balance and excellent driving comfort.

PIVOTING REAR AXLE The rear axle is pivoting to get maximum traction on the drive wheels and a smooth ride also on uneven surfaces.

PLANT GUARDS Protect plants outside the working area.

POLY-V BELT For better power transmission, less frequent retensioning and increased product life.

POWDER-COATED CUTTING DECK Powder-coated deck for improved durability and corrosion resistance.

POWER STEERING Steering effort is reduced by providing hydraulic pressure to assist when turning the wheels, making manoeuvring easier, more controlled and easier to operate.

PREMIUM SEAT Comfortable Premium seat with high back and armrests. The seat is self-draining and can be tipped to protect it from rain.

GLOSSARY OF TERMS

PRESSURE-LUBRICATED ENGINE An oil pump ensures that all vital parts in the engine get adequate lubrication.

Q

QUICK RELEASE ON AIR FILTER Makes it easy to remove the air filter for cleaning or replacement. No tools required.

QUICK RELEASE ON AIR FILTER COVER Makes it easy to access the air filter and spark plug quickly for cleaning or replacement. A valuable advantage, especially if the saw is used for long periods on a daily basis.

R

RAPIDREPLACE™ BLADE SYSTEM The cutting blades are easily removed and replaced without using any tools. This means safe and quick blade service – and with sharper blades you'll get a healthier lawn.

READYSTART The ReadyStart system eliminates the need to manually prime or choke the engine. It also reduces resistance in the starter cord by 30 %, making the mower very easy to start.

REAR IMPACT GUARD The rear-impact guard protects the pole saw engine from wear and damage.

REAR / SIDE EJECTION These cutting systems have high capacity and are therefore suitable for taller grass, coarser grass types and seldom-cut lawns.

REINFORCED CUTTING DECK The steel tube on the edge of the cutting deck gives improved durability.

REMOTE CONTROLLED CUTTING DECK The remote control makes it easy to adjust the cutting deck angle during operation.

REMOTE TEXT MESSAGING If something unforeseen disturbs operation, this function allows the robotic mower to send a text message to a pre-programmed mobile phone

REMOVABLE BATTERY PACK The battery pack is equipped with a carry handle and is very easy to remove and charge. The battery can also be charged while fitted on the machine.

RETAINED BAR NUTS The bar nuts are attached to the clutch cover. The retaining function prevents losing the bar nuts.

REVBOOST[™] Gives rapid acceleration and higher chain speed, for best limbing performance.

REVERSE GEARBOX Improves manoeuvrability and control.

REVERSE SPEED Reverse tine direction for easier operation and better manoeuvrability.

S

SAVE[™] Maximises runtime of our battery driven products.

SAFETY SWITCH The tractors are equipped with a safety switch under the seat. If the driver leaves the seat the engine and cutting deck are automatically switched off.

SEPARATE OIL FILTER A separate oil filter is easy to change to ensure that clean oil is circulated inside the engine.

SERVICE POINTS The tilting hood and easy-access servicing points make maintenance and servicing easy.

SERVICE POSITION Without tools you can quickly lift the cutting deck into the maintenance position, for convenient cleaning and service.

SIDE-MOUNTED CHAIN TENSIONER Side-mounted chain tensioner makes chain adjustment quick and easy.

SIDE PROTECTION BUMPER Additional protection when mowing next to wall edges or other obstacles.

 $\label{eq:starts} \textbf{SMART START}^{\circledast} \ \mbox{The engine and starter have been designed so the machine starts} \\ \mbox{quickly with minimum effort and reduced resistance in the starter cord.}$

SMART START® DECOMPRESSION VALVE The engine and starter have been designed so the machine starts quickly with minimum effort.

SMART START® SPRING ASSISTED START When pulling the starter cord a special spring reduces the resistance in the starter cord.

SMARTSWITCH Offers convenience and security of key-less operation, real time feedback through indicator lamps for parking brake, battery status, headlights, ROS and blade engagement as well as simplified one touch starting and stopping.

SNR Signal To Noise Ratio is a measure that compares the level of a desired signal to the level of background noise.

SNAP-LOCK CYLINDER COVER Saves time when changing spark plugs and cleaning.

SOFT-GRIP HANDLE Reduces vibrations to reduce strain and add comfort for the user.

SOFTSTART™ Electronic SoftStart™ provides starting with normal, slow acting fuses.

STAND ALONE STARTER The stand alone starter makes it easier to change starter cord if needed. Easy to service and maintain.

STARTING REMINDER A decal placed on the top cover reminds you of the correct starting sequence for easy starts.

STEP-THROUGH Ensures comfortable and easy mounting and dismounting.

Т

 $\ensuremath{\text{TAP-N-G0}}\xspace$ for a for quick cord feed. Bump the trimmer head on the ground to feed new cord.

TINE SHIELD Minimises debris spray from the rotating tines.

TOOL-LESS CHAIN TENSIONER Quick and easy chain tensioning and assembling of the bar and the chain without using any tools.

TOUCH-CONTROLS Comfortable operation with easy access touch controls for start, stop and reverse.

TRANSMISSION WITH TRIPLE BALL BEARINGS Fitted with a powerful worm gear transmission with triple ball bearings, for increased durability.

TRANSPARENT FUEL TANK Large, transparent fuel tank makes it easy to check the fuel level.

TRANSPORT WHEEL / S Simplifies transport. Easy to raise during operation.

TRIOBRAKE™ A unique feature that allows the chain brake to be activated either automatically by the inertia release mechanism or mechanically by your left or right hand. This will help you work safer, easier, more efficiently and in a more ergonomic fashion, with less strain on the body.

TURN KEY START Start the engine without adjusting a choke, regardless of the weather conditions – just turn the key.

TWO-WAY ROTATION The trimmer head can rotate to the left or to the right. This means you avoid grass on walkways.

U

U-CUT™ A new steering technology that makes it possible to do tighter turns around obstacles.

ULTRASONIC SENSOR Built-in sensors using ultrasonic technology help the mower to adjust the speed depending on the surroundings, and avoids hard collisions.

V

VARIABLE DRIVE SPEED Enables ground speed to be adjusted according to the needs and the conditions of the grass area where the work is taking place

VISIBLE FUEL LEVEL Makes it easy for the user to see when refill of fuel is needed.

VIBRATION-DAMPENED CARBURETTOR When vibration dampening the carburettor the engine runs smoother and with less need for adjustments.

W

WATER HOSE CONNECTION Simple hose attachment facilitates cleaning of the cutting deck.

WEATHER TIMER Adjusts the working time to the lawn's growth rate, meaning that the robotic mower will maximise or minimise its mowing time due to the weather.

X

XP[®] Premium professional chainsaws – packed with innovative design and technique for superb productivity.

X-CUT™ Researched and developed in-house. Our new family name of chains especially developed for our chainsaws, offering stay sharp technology, pre-stretched in the factory and increased efficiency.

X-FORCE[®] Researched and developed in-house. Our new family name of pro-laminated bars, offering more durability and lighter weight.

 $\textbf{X-TORQ}^{\circledast}$ Our patented, world-leading, 2-stroke X-Torq^{\textcircled{mathematical}} technology gives you more power when you need it. But with less fuel consumption and less emissions, when compared to a standard 2-stroke engine. It's technology that works for you and the environment.


X-TRA EFFICIENCY The Rider X model features a car style engine hood with sound absorbing material for improved sound quality. This low sound technology makes it possible to increase the engine power and thereby also the blade and ground speed, which makes the X model extra efficient.

X-TRAC, HEAVY-TREAD TYRES For extra good traction.

OTHER

 $\ensuremath{\text{12V}}\xspace$ UULET Makes it possible to plug in extra electric equipment, charge your cellular phone etc.

NOTES

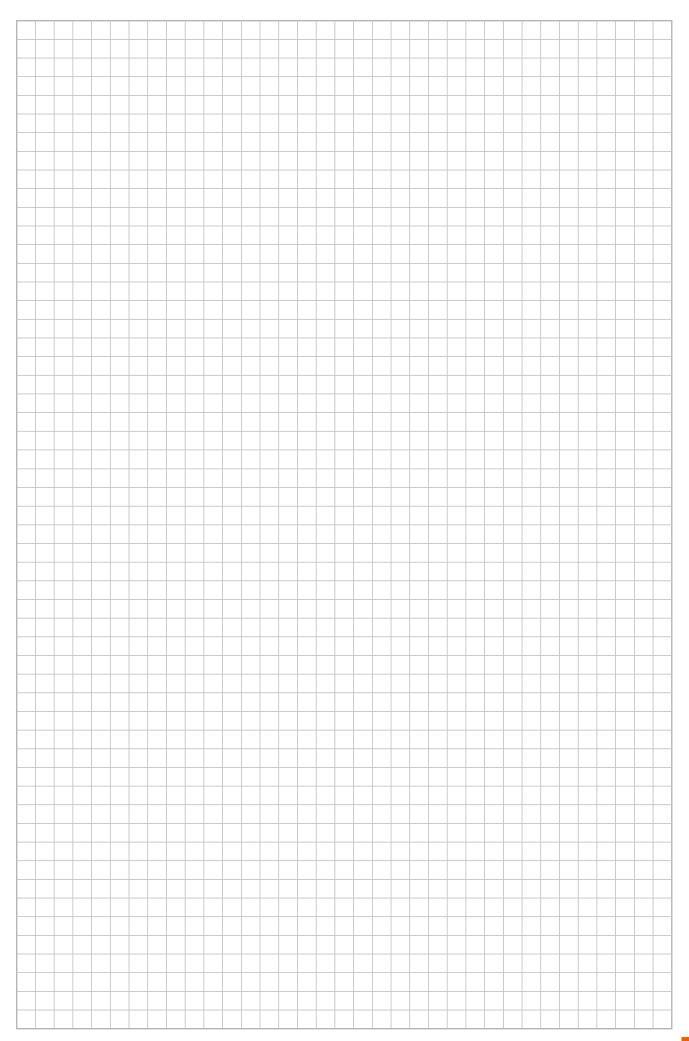



SUSTAINABLE GREEN SPACES THROUGH INNOVATION

Helping to shape green spaces and urban environments is at the core of our vision. By shifting to technologies that make our products as smart, efficient and optimised as possible – and by investing in sustainable innovations – we can make a real difference and contribute to positive change. Below you'll find some of our efforts within our various product categories.



ROBOTICS WITH A VISION: ZERO IMPACT

Husqvarna Automower® supports the transition from petrol-driven lawn mowers to silent and efficient lawn management in private gardens, commercial properties and public green spaces. Husqvarna Automower® robotic mowers have an extremely low noise level (down to only 58dB) and can replace ride-on and walk-behind mowers in residential areas, parks and green spaces as well as sports facilities, thereby reducing the carbon footprint and noise levels.

CHAINSAW INNOVATIONS TO REDUCE EMISSIONS

Since 1990, we have reduced our chainsaws' fuel consumption by more than 30 %. Our 70cc pro chainsaws have approximately 10 % less CO2 emissions compared to its predecessors thanks to innovations like the X-Torq[®] engine technology. And over the last 20 years, NOx + HC emissions have decreased by more than 50 % for combustion engines.





BATTERY RANGE TO CUT NOISE AND CARBON

Our wide range of low noise, battery-powered equipment delivers opportunities to use low-carbon energy sources and improves safety. Furthermore they spare the environment from fumes and the products have lower vibration and noise levels. Carbon emissions can be reduced to almost zero during use if the battery is charged with renewable energy.

SOFTWARE THAT CUTS PETROL AND PRODUCT COSTS

We are finding new ways to influence how customers can optimise their product fleet. By gathering data from devices and providing the analytics to crunch that data, digitisation helps customers optimise utilisation, uptime and efficiency. It also gives insights into how to create even better customer solutions and fine-tune our products to each task.





SUSTAINABLE INNOVATIONS FOR TOMORROW

While our target relies primarily on sustainable products in our current product mix, we're already working on future innovations such as the Husqvarna Battery Box – the world's first connected garden community toolshed that combines environmental awareness with a sharing economy. Please note that this product is still in a pilot stage and its future depends on market maturity.

SUSTAINABLE PRINTING

This publication is printed on materials from well-managed forests and other controlled sources. It has been printed using an alcoholfree process, with a water-based varnish and vegetable-based printing inks, which are non-hazardous and are from renewable sources. The printing plates used to produce this brochure were made in a chemical-free process.





For further advice and support:



Husqvarna UK Ltd, Preston Road, Aycliffe Business Park, Newton Aycliffe, County Durham, DL5 6UP. Email: info@husqvarna.co.uk

Disclaimer Husqvarna UK Ltd reserve the right to change or modify any of their prices and product specifications without any prior notification. Copyright © 2023 Husqvarna AB (publ). All rights reserved. Husqvarna and other product and feature marks are trademarks of the Husqvarna Group as displayed at www.international.husqvarna.com